




Connectors > Connector Accessories > Connector Seals & Cavity Plugs

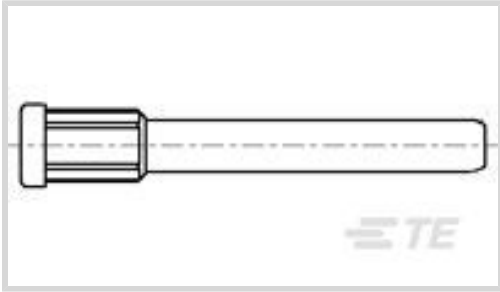

Primary Product Color: **Yellow**

Operating Temperature (Max): 65 °C, 70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C [149 °F, 158 °F, 167 °F, 176 °F, 185 °F, 194 °F, 212 °F, 221 °F, 230 °F, 248 °F]

Operating Temperature Range: -40 – 120 °C [-40 – 248 °F]

Features

Body Features

Primary Product Color	Yellow
-----------------------	--------

Usage Conditions

Operating Temperature (Max)	65 °C, 70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C[149 °F][158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F]
Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]

Packaging Features

Packaging Quantity	30000
Packaging Method	Bag

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.



Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # CAT-T319-CH8172
TH/.025 CONNECTOR SYSTEM,
HOUSING

Also in the Series | 0.64/025 Connector System

Automotive Connector Caps & Covers
(5)

Automotive Connector Locks &
Position Assurance(1)

Automotive Housings(127)

Automotive Terminals(16)

Connector Seals & Cavity Plugs(1)

Other Automotive Connector
Accessories(4)

PCB Headers & Receptacles(158)

Customers Also Bought







TE Part #1717677-2
AMPSEAL 16 Housings



TE Part #1747731-1
0.64/1.0 SEALED 49POS PLUG ASSY, C KEY

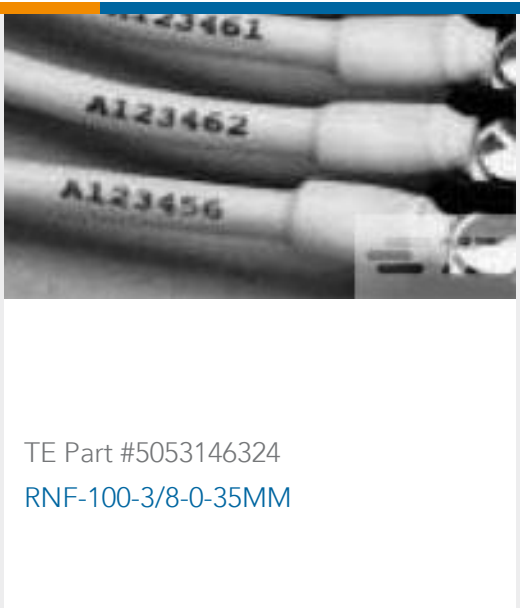

TE Part #5053146324
RNF-100-3/8-0-35MM

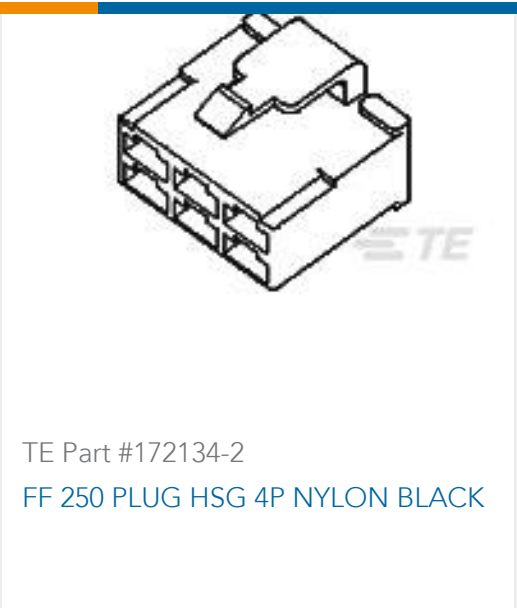

TE Part #172134-2
FF 250 PLUG HSG 4P NYLON BLACK



TE Part #1747731-3
0.64/1.0 SEALED 49POS PLUG ASSY, A KEY



TE Part #1939152-1
PLUG HSG ASSY 60P 0.64/1.0 SEALED CONN



TE Part #2303790-1
PLUG ASSEMBLY 114POS



TE Part #1-721038-3
CRIMPER, WIRE F

Documents

Product Drawings
025/040 CAVITY PLUG

Japanese

CAD Files
Customer View Model
ENG_CVM_1612108-4_O3.3d_igs.zip

English

Customer View Model
ENG_CVM_1612108-4_O3.3d_stp.zip

English

Customer View Model
ENG_CVM_1612108-4_O3.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications
Crimping CLEAN BODY 025/040 Receptacle Contact

English

Application Specification

English

Instruction Sheets
Instruction Sheet (U.S.)

English

1612108-4

Yellow, -40 – 120 °C [-40 – 248 °F] Operating Temperature, 0.64/025 Connector System

