


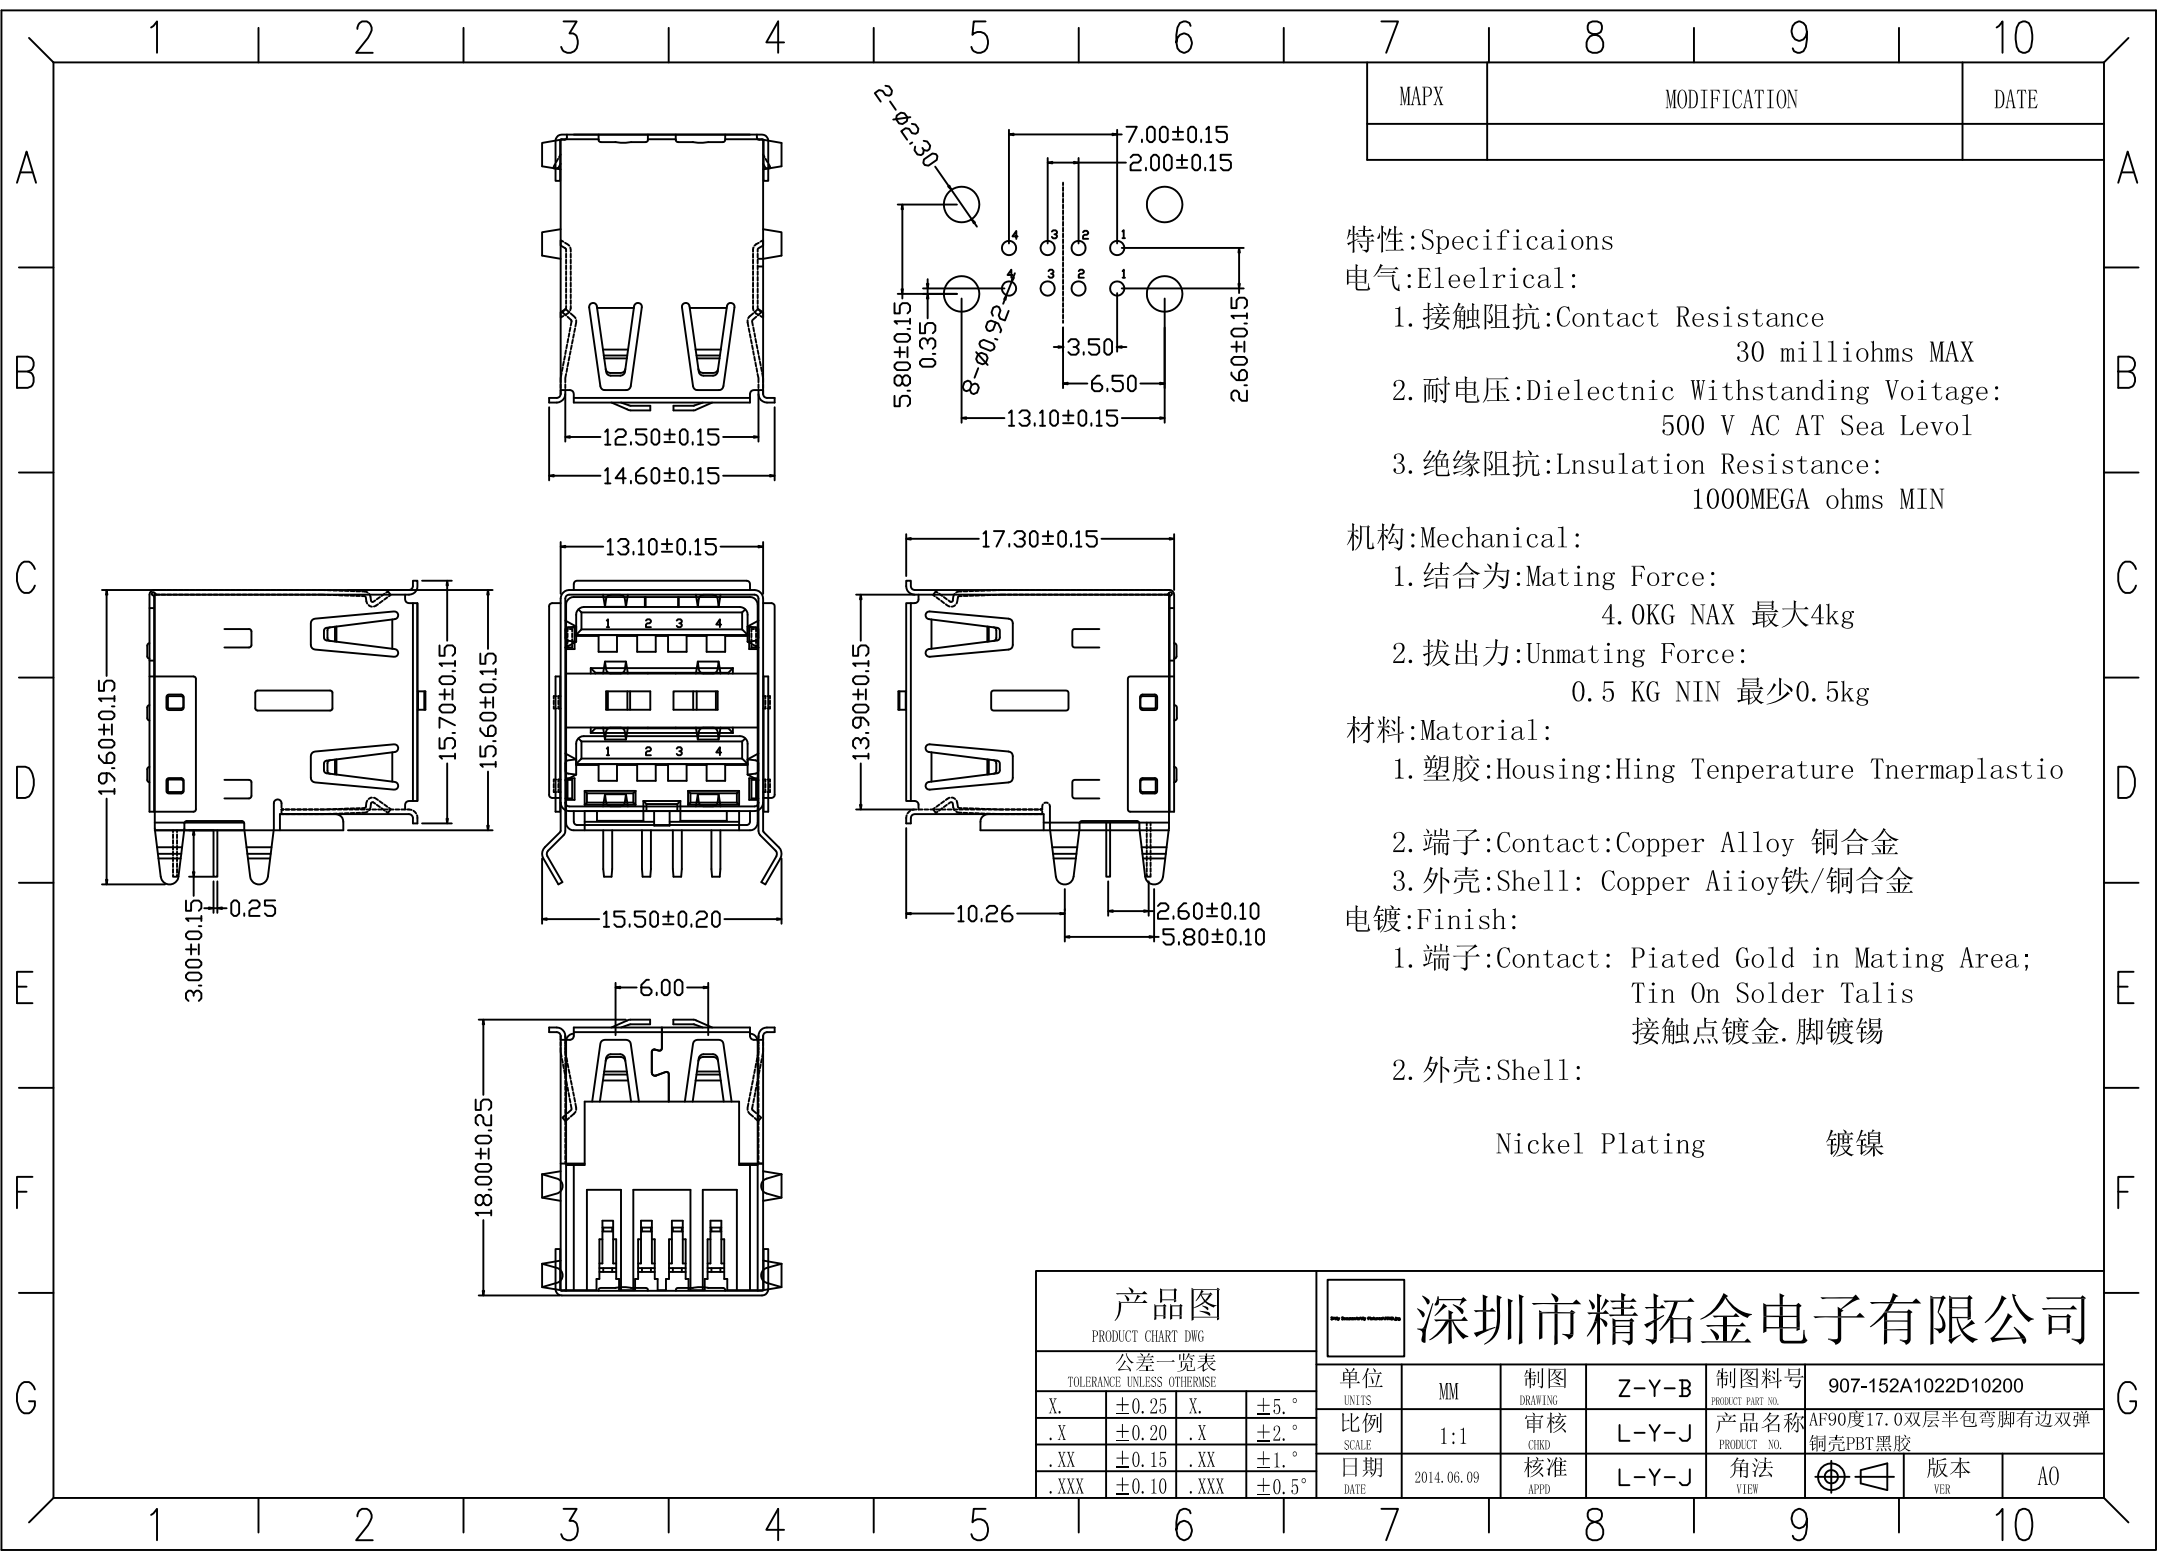

MAPX	MODIFICATION	DATE

- 特性:Specificaions
电气:Eleelrical:
- 1. 接触阻抗:Contact Resistance
30 milliohms MAX
 - 2. 耐电压:Dielectnec Withstanding Voitage:
500 V AC AT Sea Levot
 - 3. 绝缘阻抗:Lnsulation Resistance:
1000MEGA ohms MIN

- 机构:Mechanical:
- 1. 结合为:Mating Force:
4.0KG NAX 最大4kg
 - 2. 拔出力:Unmating Force:
0.5 KG NIN 最少0.5kg

- 材料:Matorial:
- 1. 塑胶:Housing:Hing Temperature Tnermaplastio
 - 2. 端子>Contact:Copper Alloy 铜合金
 - 3. 外壳:Shell: Copper Aiioy铁/铜合金

- 电镀:Finish:
- 1. 端子>Contact: Plated Gold in Mating Area;
Tin On Solder Talis
接触点镀金. 脚镀锡
 - 2. 外壳:Shell:

Nickel Plating 镀镍

产品图 PRODUCT CHART DWG				— 深圳市精拓金电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	907-152A1022D10200
X.	±0.25	X.	±5.°	比例 SCALE	1:1	审核 CHKD	L-Y-J	产品名称 PRODUCT_NO.	AF90度17.0双层半包弯脚有边双弹 铜壳PBT黑胶
.X	±0.20	.X	±2.°	日期 DATE	2014.06.09	核准 APPD	L-Y-J	角法 VIEW	⊙ ⊞
.XX	±0.15	.XX	±1.°					版本 VER	A0
.XXX	±0.10	.XXX	±0.5°						