




Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

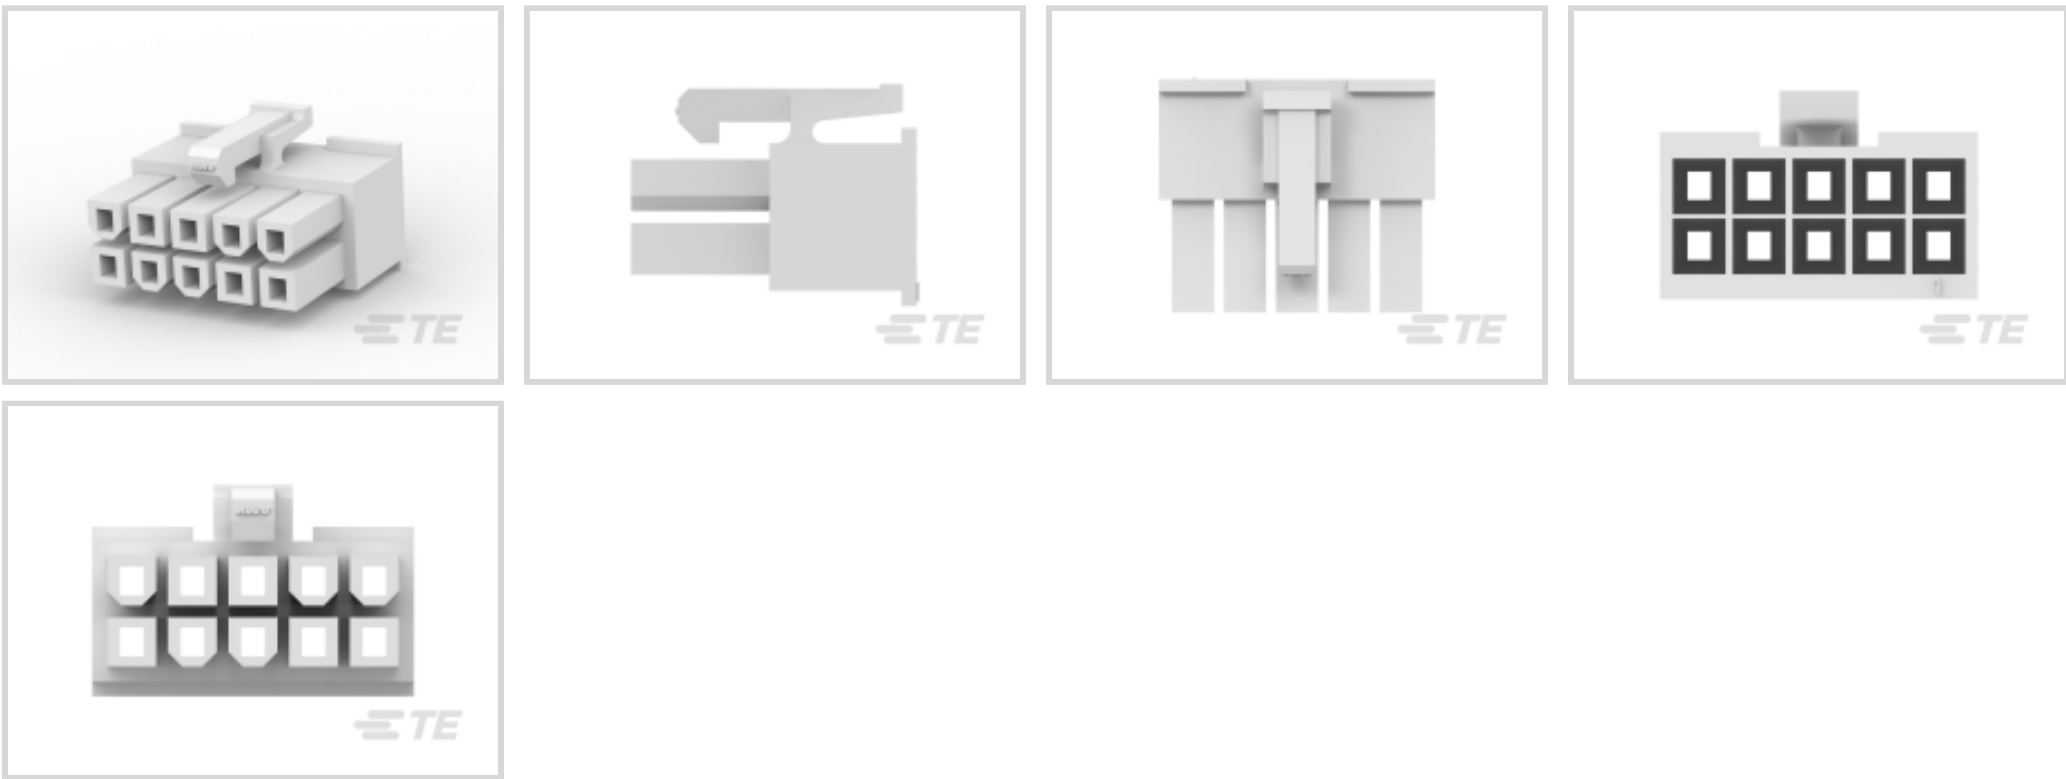

Rectangular Power Connector Type: **Housing**

Connector & Housing Type: **Receptacle**

Connector System: **Wire-to-Board, Wire-to-Wire**

Number of Positions: **10**

Centerline (Pitch): **4.2 mm [.165 in]**

Features

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board, Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Insertion Force	4 Newton
Number of Positions	10
Number of Rows	2

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Contact Features

Contact Retention Within Housing	Without
Contact Type	Receptacle

Housing Features



Centerline (Pitch)	4.2 mm[.165 in]
Housing Material	Nylon

Dimensions

Connector Height	18.8 mm[.74 in]
Product Width	11.7 mm[.46 in]
Product Length	22.3 mm[.88 in]
Row-to-Row Spacing	1.2 mm[.165 in]

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Identification Marking

Circuit Identification Feature	With
--------------------------------	------

Industry Standards

Compatible With Agency/Standards Products	CSA, UL, VDE
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-2
Glow Wire Rating	Standard Part - Not Glow Wire

Packaging Features

Packaging Quantity	4000
Packaging Method	Package

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2017 (173) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Also in the Series | AMP-DUAC



Connector Caps & Covers(1)



Connector Contacts(4)



Connector Hardware(1)



Insertion & Extraction Tools(1)



Rectangular Power Connectors(6)

Customers Also Bought



TE Part #ZPF000000000136485
RECEPTACLE MALE FOR 12 PINS,
CAL1,6



TE Part #EC9833-000
ZHD-SCE-3.2-50-S1-4



TE Part #1-1415543-5
RTE44110



TE Part #ASA158F12390235000
623 PLUG






TE Part #ZPF00000000205373

PLUG MALE ANG.90 CAL.20 - FXP



TE Part #YZ-KC-212751A-PY00

TOOL DISMOUNTING - FXP2

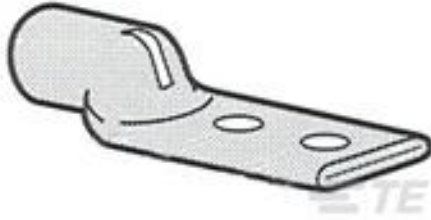

TE Part #55992-1

TERMINAL,AMPOWER R 2/0 5/16



TE Part #ZPF00000000205378

CONTACT MALE ANG.90, CAL20, 120MM2 - FXP



TE Part #ZPF00000000205388

CONTACT FEMALE CAL.20, M12 - FXP

Documents

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_1-106527-0_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_1-106527-0_D.3d_igs.zip

English

Customer View Model

ENG_CVM_1-106527-0_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

Product Specifications

Application Specification

English

Agency Approvals

Agency Approval Document

English