

SACC-CIP-M12MS-5P SMD-SP - Contact carrier



1418647

<https://www.phoenixcontact.com/us/products/1418647>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact carrier, 8-position, Pin, straight, M12, coding: A, PCB mounting, SMD reflow, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239210

Your advantages

- Reduced mounting costs thanks to two-piece device connector
- Packaging available for automated pick and place assembly
- All common pin assignments and codings available
- Easy device integration thanks to mechanical port screw connections with threaded attachment, press-in contour or direct integration in the front plate
- Additional gasket for the device when not plugged in

Commercial data

Item number	1418647
Packing unit	5 pc
Minimum order quantity	5 pc
Product key	ABQXAA
GTIN	4055626162997
Weight per piece (including packing)	7.54 g
Weight per piece (excluding packing)	7.54 g
Country of origin	DE

SACC-CIP-M12MS-5P SMD-SP - Contact carrier



1418647

<https://www.phoenixcontact.com/us/products/1418647>

Technical data

Product properties

Product type	Contact insert
Number of positions	8
Seal present	yes
Coding	A
Thread type	M12

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	0.8 kV
Contact resistance	$\leq 3 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage U_N	30 V
Nominal current I_N	2 A

Connection data

Connection method	SMD reflow
-------------------	------------

Material specifications

Flammability rating according to UL 94	V0
Seal material	FKM
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA

Connector

Connection 1

Head design	Pin
Head cable outlet	straight
Head thread type	M12
Coding	A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

Environmental and real-life conditions

Ambient conditions

SACC-CIP-M12MS-5P SMD-SP - Contact carrier



1418647

<https://www.phoenixcontact.com/us/products/1418647>

Degree of protection (when plugged in)	IP67 (correctly plugged in and locked)
Degree of protection	IP67
Ambient temperature (operation)	-40 °C ... 105 °C (Plug / socket)
	-55 °C ... 105 °C (without mechanical actuation)

Standards and regulations

M12

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101
Note	In line with

Mounting


Mounting type	PCB mounting
---------------	--------------

1418647

<https://www.phoenixcontact.com/us/products/1418647>

Drawings

Schematic diagram

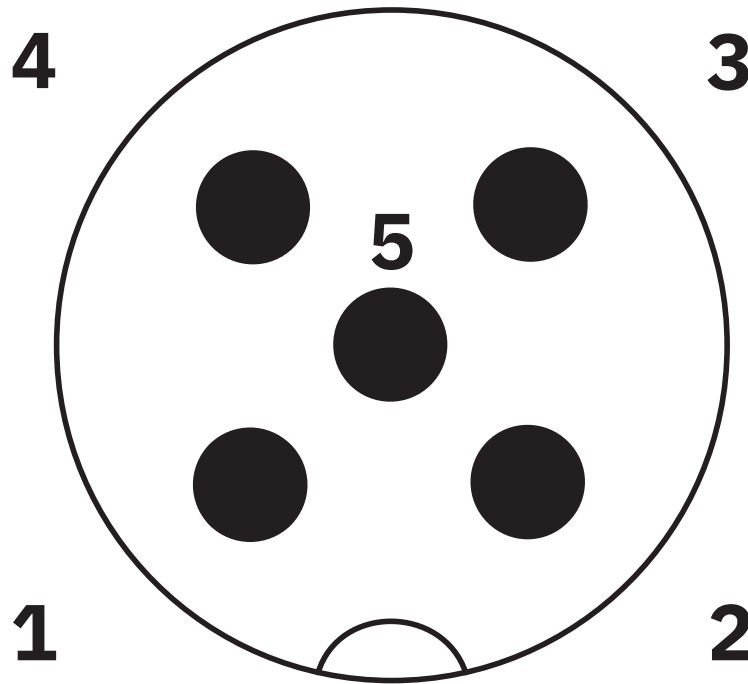

Pin assignment M12 male connector, 5-pos., A-coded, male side

SACC-CIP-M12MS-5P SMD-SP - Contact carrier



1418647

<https://www.phoenixcontact.com/us/products/1418647>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1418647>

<div> cULus Recognized Approval ID: E221474-20160506</div>				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	60 V	4 A	-	-

SACC-CIP-M12MS-5P SMD-SP - Contact carrier



1418647

<https://www.phoenixcontact.com/us/products/1418647>

Classifications

ECLASS

ECLASS-11.0	27440223
ECLASS-12.0	27440223
ECLASS-13.0	27440223

ETIM

ETIM 9.0	EC003557
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

1418647

<https://www.phoenixcontact.com/us/products/1418647>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	cea1da4e-fd00-4df4-832a-7f8ffdc4bddd

SACC-CIP-M12MS-5P SMD-SP - Contact carrier



1418647

<https://www.phoenixcontact.com/us/products/1418647>

Accessories

SACC-BP-M-M12/M15-6-SMD - Housing screw connection

1414000

<https://www.phoenixcontact.com/us/products/1414000>



Housing screw connection, Pin, Rear mounting, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239053

SACC-BP-M-M12/M15-6-SMD SCO - Housing screw connection

1414002

<https://www.phoenixcontact.com/us/products/1414002>



Housing screw connection, Pin, M12-SPEEDCON, Rear mounting, M15 x 1, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239054

SACC-CIP-M12MS-5P SMD-SP - Contact carrier

1418647

<https://www.phoenixcontact.com/us/products/1418647>



SACC-FP-M-M12/M14 SMD - Housing screw connection

1412078

<https://www.phoenixcontact.com/us/products/1412078>



Housing screw connection, Pin, M12, Front mounting, M14 x 1, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1238970

SACC-FP-M-M12/PRESS SMD - Housing screw connection

1412080

<https://www.phoenixcontact.com/us/products/1412080>



Housing screw connection, Pin, M12, Front mounting

SACC-CIP-M12MS-5P SMD-SP - Contact carrier

1418647

<https://www.phoenixcontact.com/us/products/1418647>



SACC-BP-M-M12-SMD PP - Housing screw connection

1107993

<https://www.phoenixcontact.com/us/products/1107993>



Housing screw connection, Pin, M12-Push-pull external locking, Rear mounting, SMD, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1308006

SACC-FP-M-M12-SMD PP - Housing screw connection

1107999

<https://www.phoenixcontact.com/us/products/1107999>



Housing screw connection, Pin, M12-Push-pull external locking, Front mounting, SMD

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com