


# In-Line Phone Jacks

## 16PJ119N-EX



In-Line Phone Jacks

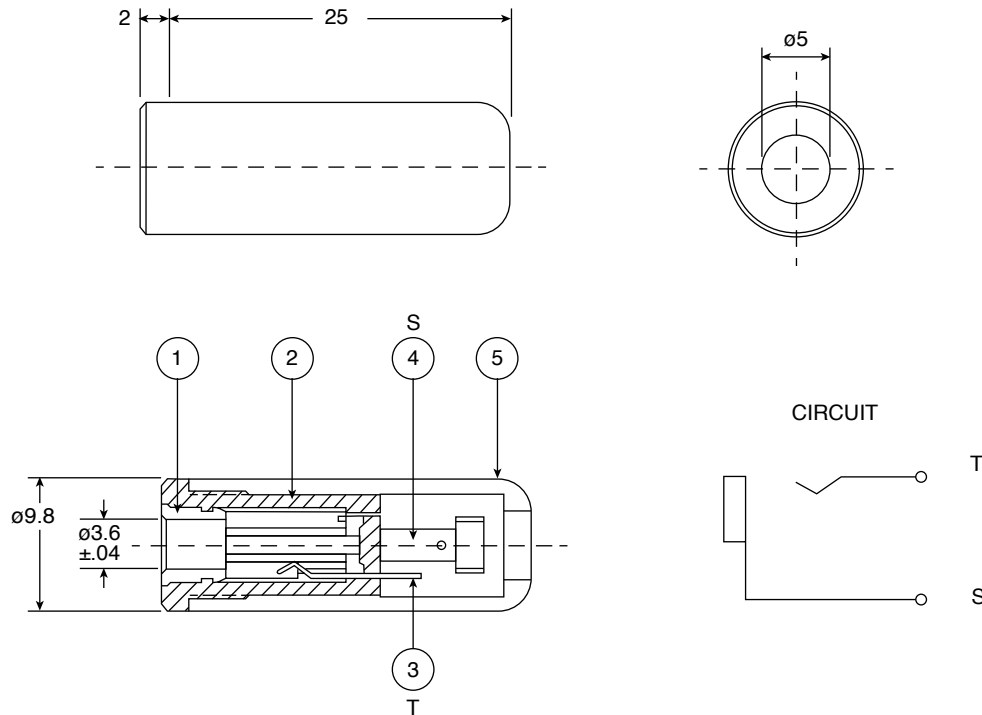

**DIMENSIONS: mm**

SPECIFICATIONS	
<b>Dielectric Strength:</b>	500V AC for 1 Min.
<b>Contact Resistance:</b>	50mΩ Max.
<b>Insulation Resistance:</b>	100mΩ Min. at 500V DC
<b>Tolerance:</b>	±0.3mm
RoHS Compliant by Exemption	

Pin Configurations	
<b>Sleeve (1):</b>	BSBM, Ni Finish
<b>Housing (2):</b>	PA
<b>Contact A (3):</b>	PSR t = 0.3, Ni Finish
<b>Contact B (4):</b>	PBS t = 0.25, Ni Finish
<b>Cap (5):</b>	ABS

**Date Last Revised: 03-15-16**

**Available from Mouser Electronics**  
**1-800-346-6873 / [www.mouser.com](http://www.mouser.com)**

KC-301442

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

16PJ119N-EX

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kobiconn:](#)

[16PJ119N-EX](#)