
Harnessflex SPECIALIST CONDUIT SYSTEMS

SEG Smooth End Grommet



One-piece slit grommet providing abrasion protection for cables passing through a hinged fitting junction where conduit is not required. The grommet sits tightly into the fitting junction to secure the cable.

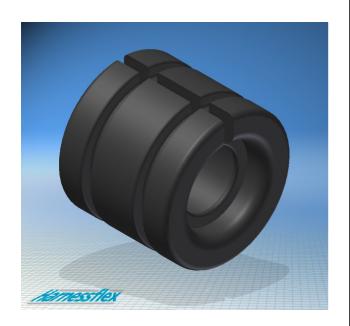

Specifications

SEG

Material: Co-Polyester Blue


Operating temperature range:


Continuous, -25 to 120°C Short term, -40 to 150°C SEG/H

Material: TPV Black

Operating temperature range:

Continuous, -35 to 135°C Short term, -45 to 175°C





Part Number	Conduit Size		Α	В	С	D
	NC	NW				
SEG12	12	10	12.0	13.5	8.0	1.0
SEG20	21	17				
SEG12/H	12	10	12.0	13.5	8.0	1.0

Harnessflex Limited. Station Road, Coleshill, Birmingham B46 1HT +44 1675 468222 +44 1675 464930 www.harnessflex.com