
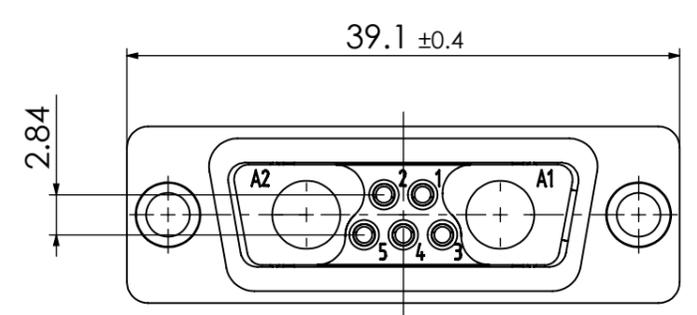
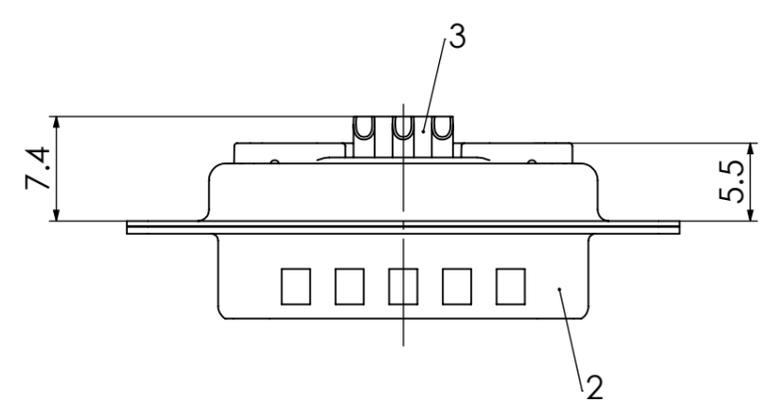
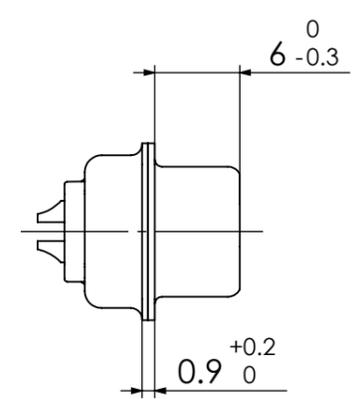


RoHS compliant
by exemption

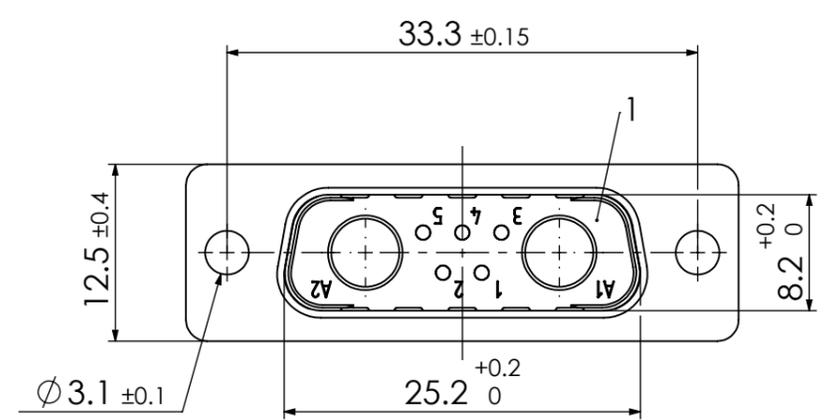

3	5	Signal contact	P0 / Brass	AuroPur / AWG 20
2	1	Shell	Steel	tin plated
1	1	Insulator	PCT (-55°C to +150°C)	natural
No.	St.	Part	Type Description/Material	Surface plating/Colour/Class

FUNCTIONAL SYMBOLS ▽ = 0 ▽ = 0 ▽ = 0					THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
DIMENSION UNITS		SCALE		MEASUREMENTS WITHOUT TOLERANCE ACC. TO						
mm		2:1		ISO 2768-m						
CURRENT REVISION							FCT D-Sub Mixed-Layout Connector PRODUCT CUSTOMER DRAWING			
DRWN: DRAWN BY		msteinbrueck		13-09-2023						
APPR: APPR BY		mteubel		15-09-2023						
INITIAL REVISION							MATERIAL NUMBER 1731071866			
DRWN: DRAWN BY		MTeubel		10-10-2013						
APPR: APPR BY		ADenzinger		10-10-2013						
REPLACEMENT FOR:		FRIST ANGLE PROJECTION		DRAWING		DOCUMENT NUMBER		CUSTOMER		
1731071866_Rev. A1				A3-SIZE		FH7W2PA-5433		GENERAL MARKET		
							REVISION		SHEET NUMBER	
							2		1 OF 1	

COMMENT: ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT, IT MAY NEITHER BE DUPLICATED NOR MADE AVAILABLE TO A THIRD PARTY. AND IT ALSO MAY NOT BE IMPROPERLY USED BY THE RECEIVER, OR A THIRD PARTY.