


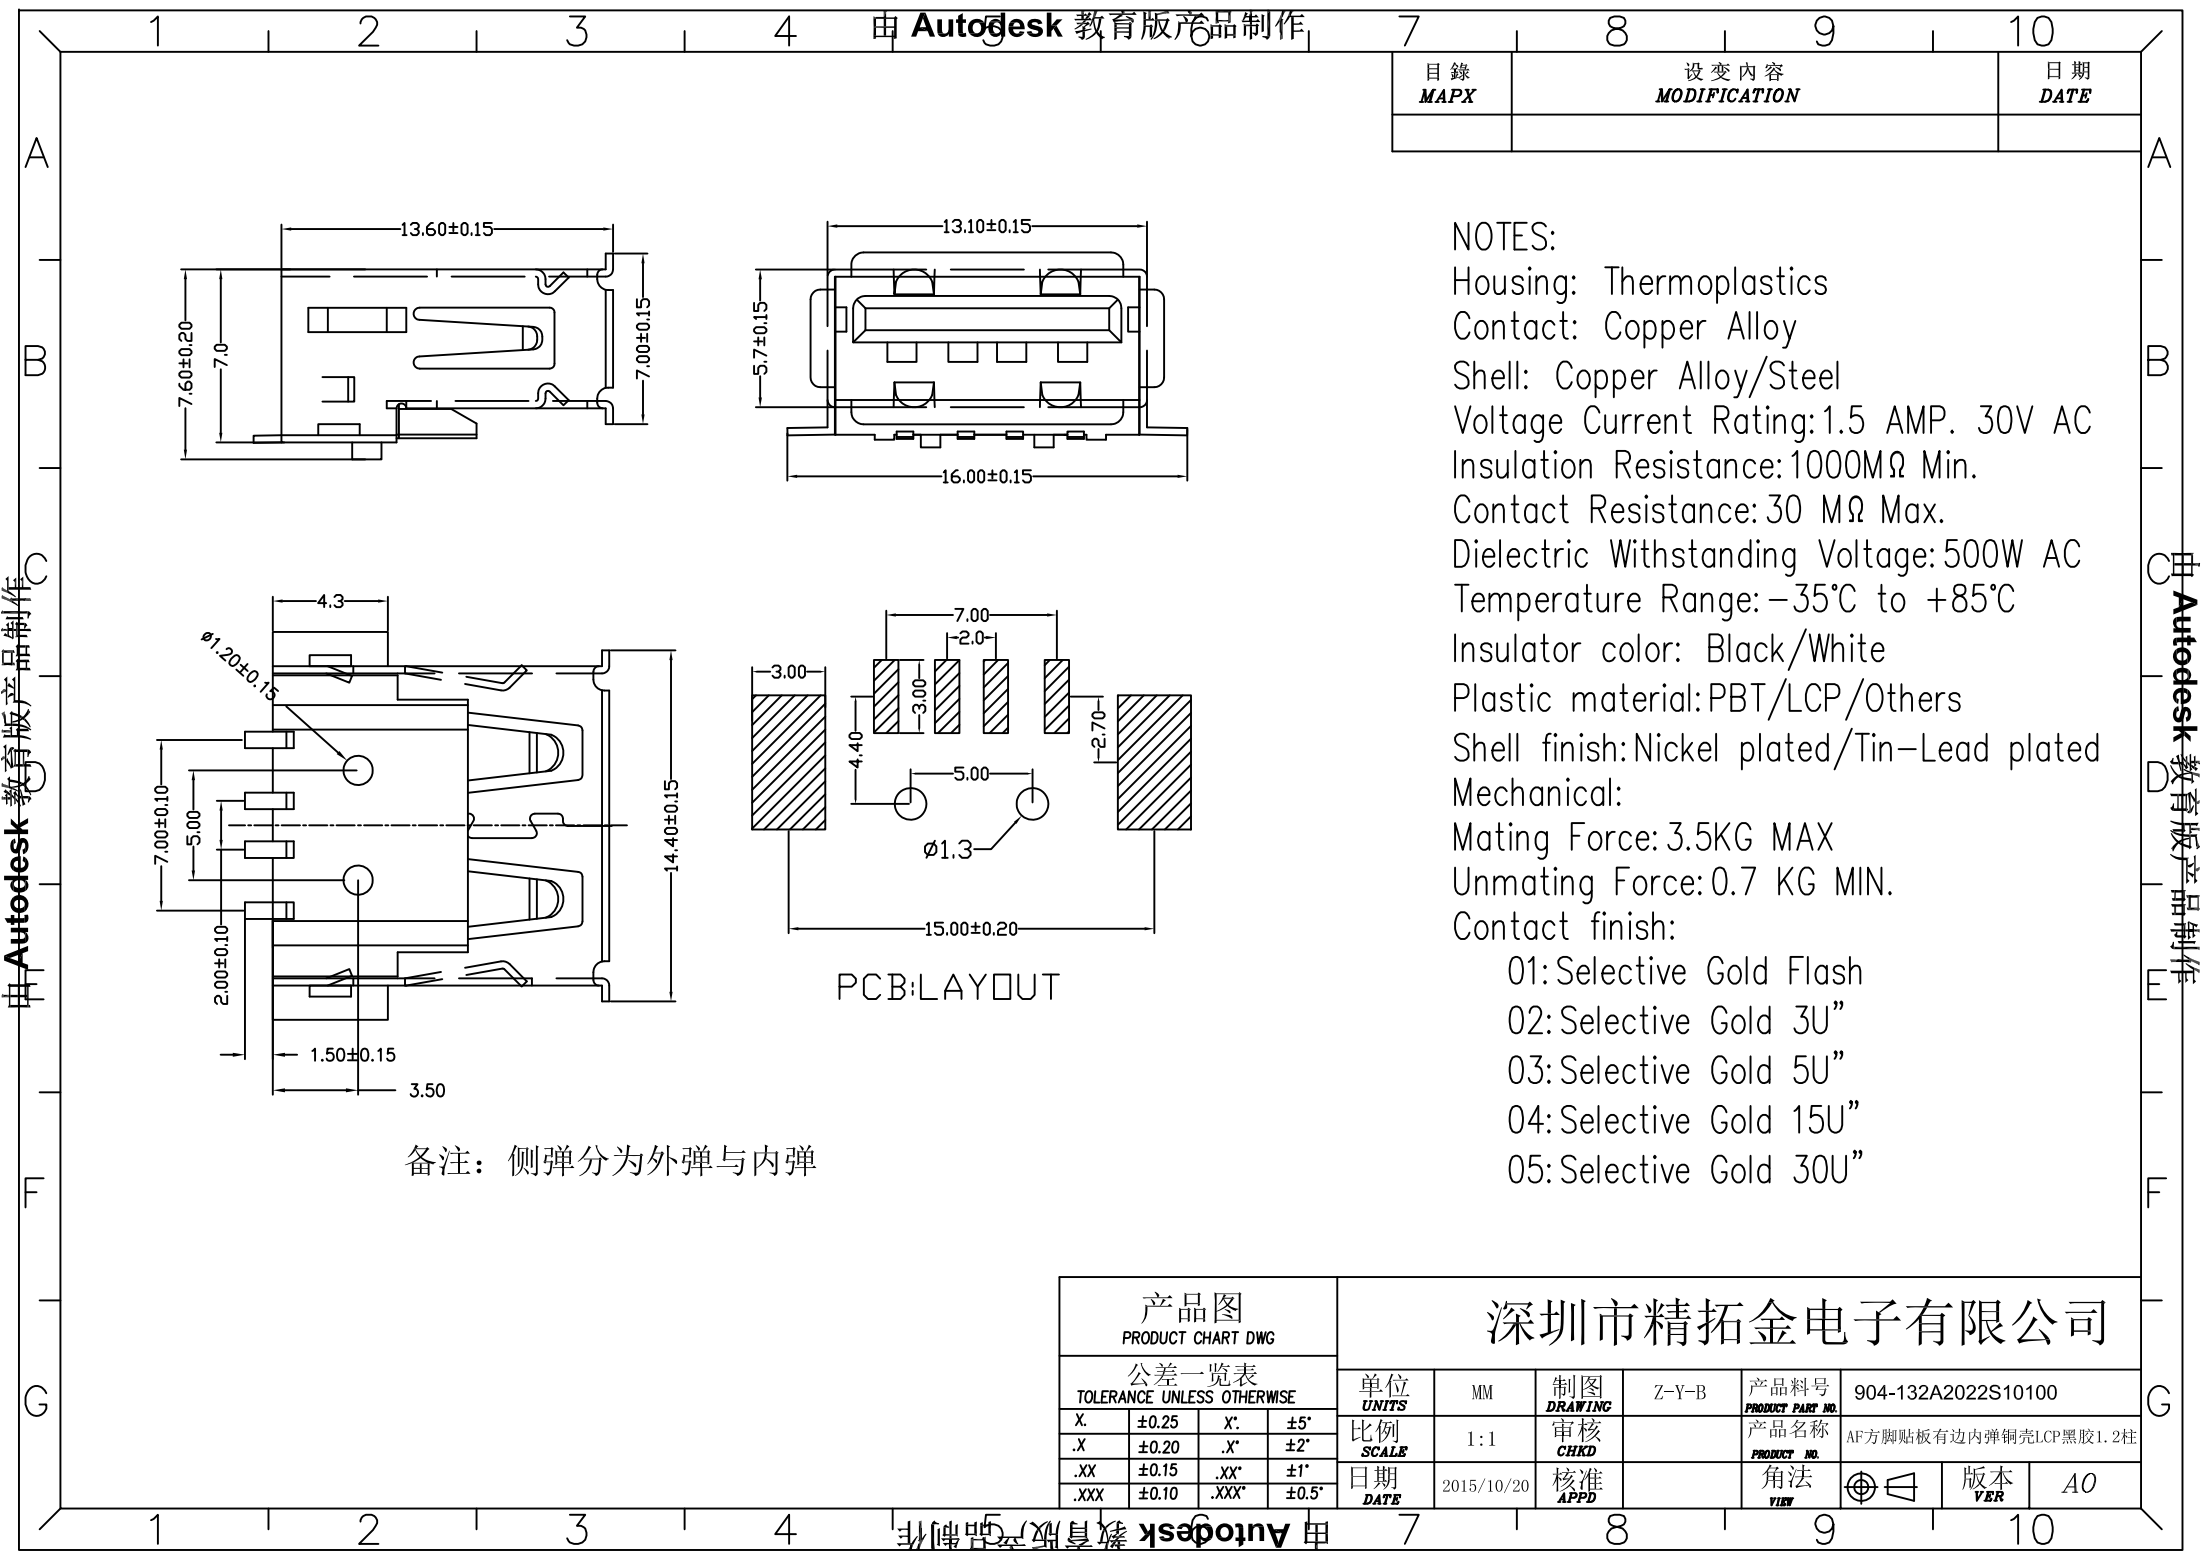

目錄 MAPX	設變內容 MODIFICATION	日期 DATE

NOTES:

Housing: Thermoplastics

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating: 1.5 AMP. 30V AC

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 30 MΩ Max.

Dielectric Withstanding Voltage: 500W AC

Temperature Range: -35°C to +85°C

Insulator color: Black/White

Plastic material: PBT/LCP/Others

Shell finish: Nickel plated/Tin-Lead plated

Mechanical:

Mating Force: 3.5KG MAX

Unmating Force: 0.7 KG MIN.

Contact finish:

01: Selective Gold Flash

02: Selective Gold 3U"

03: Selective Gold 5U"

04: Selective Gold 15U"

05: Selective Gold 30U"

產品圖 PRODUCT CHART DWG		深圳市精拓金电子有限公司						
公差一览表 TOLERANCE UNLESS OTHERWISE				單位 UNITS	MM	制圖 DRAWING	Z-Y-B	產品料號 PRODUCT PART NO.
X.	±0.25	X'.	±5°	比例 SCALE	1:1	審核 CHKD		904-132A2022S10100
.X	±0.20	.X'.	±2°	日期 DATE	2015/10/20	核准 APPD		產品名稱 PRODUCT NO.
.XX	±0.15	.XX'.	±1°				角法 VIEW	AF方脚貼板有邊內彈銅殼LCP黑膠1.2柱
.XXX	±0.10	.XXX'.	±0.5°					版本 VER
								A0