

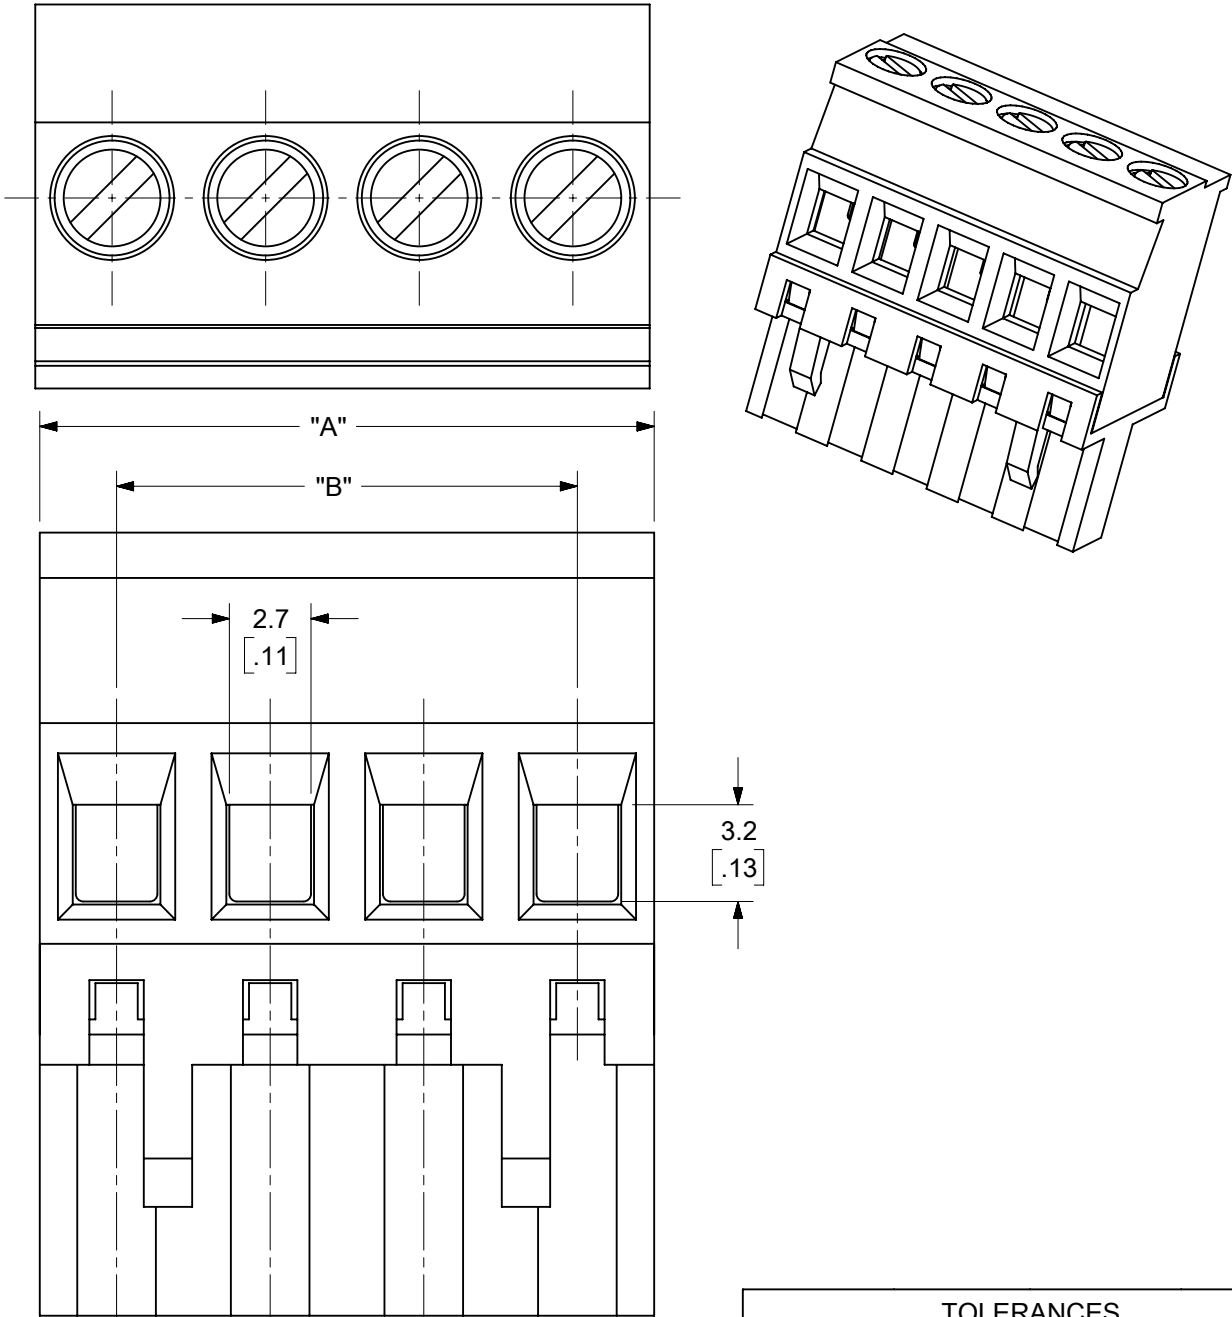


- SPECIFICATIONS:
- MATERIAL:
 - M3 CLAMP SCREW: ZINC PLATED STEEL
 - BODY: PA66, UL94-V0
 - TERMINAL: TIN PLATED COPPER ALLOY
 - CAGE: NICKEL PLATED BRASS
 - COVER: PA66, UL94-V0
 - WIRE RANGE: 12 - 30 AWG
 - ELETRICAL RATING: 300V, 18A PER UL
 - WIRE STRIP LENGTH: 5.0mm.
 - OPERATING TEMPERATURE: -40°C to +105°C.
 - MAX TORQUE: 5 IN LBS.
 - INSULATION RESISTANCE: DC 500V, 500MΩ.
 - DIELECTRIC WITHSTAND: AC 2500V FOR 1 MINUTE.
 - BREAKDOWN VOLTAGE: 4000V.
 - CONTACT RESISTANCE: <10 mΩ.

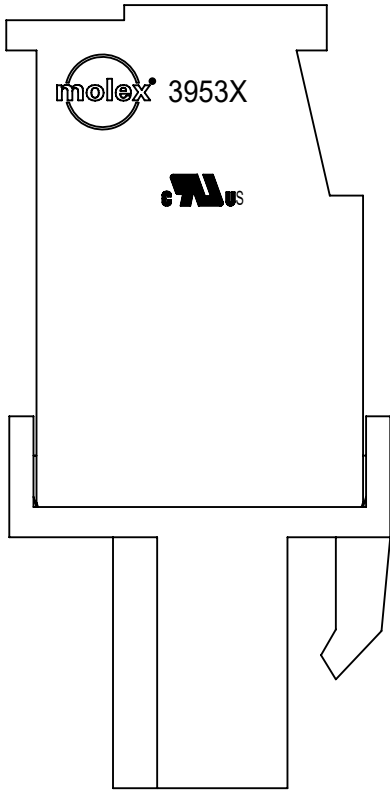

TOLERANCES			
MM	TOL	INCH	TOL
0-6	±0.25	0-.24	±.010
>6-30	±0.40	>.24-1.18	±.016
>30-120	±0.50	>1.18-4.76	±.020
>120	±0.80	>4.76	±.031

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	DIMENSION UNITS		SCALE
	MM/INCH		4:1
	GENERAL TOLERANCES (UNLESS SPECIFIED)		
DIVISIONAL SYMBOLS	4 PLACES	±	---
	3 PLACES	±	---
	2 PLACES	±	---
	1 PLACE	±	---
DIVISIONAL SYMBOLS	0 PLACES	±	---
	ANGULAR TOL		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		
	THIRD ANGLE PROJECTION		
DIVISIONAL SYMBOLS	DRAWING		SERIES
	B-SIZE		39533
	MATERIAL NUMBER		CUSTOMER
	SEE SHEET-2		GENERAL MARKET
DIVISIONAL SYMBOLS	DOCUMENT NUMBER		REVISION
	SD-39533-001		A5
	SHEET NUMBER		1 OF 2
	SHEET NUMBER		

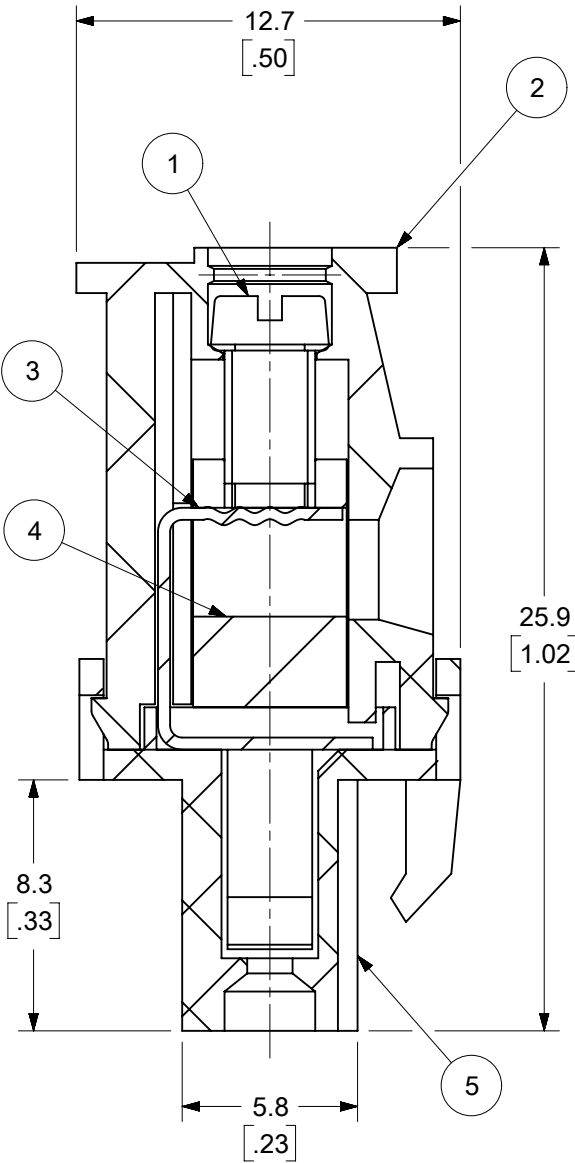