

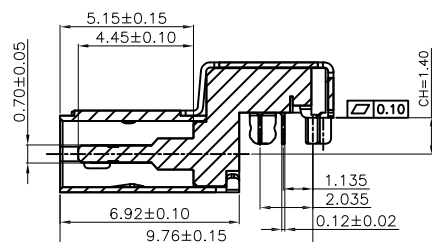
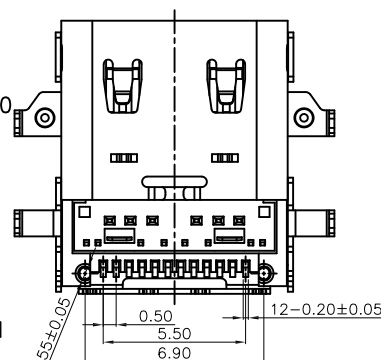
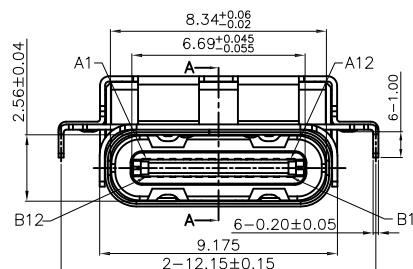


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/24/22	
A		UPDATE TITTLE	4/24/23	LH/AC1
B		UPDATE TITTLE	2/27/24	LH/RC

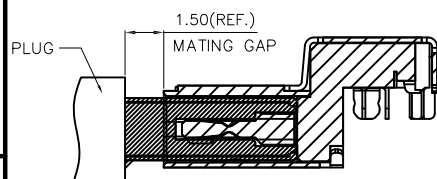


SECTION A-A

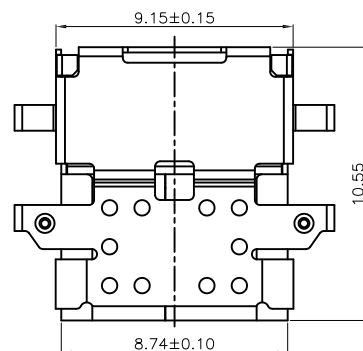


Lead free, RoHS compliant.




DETAIL B

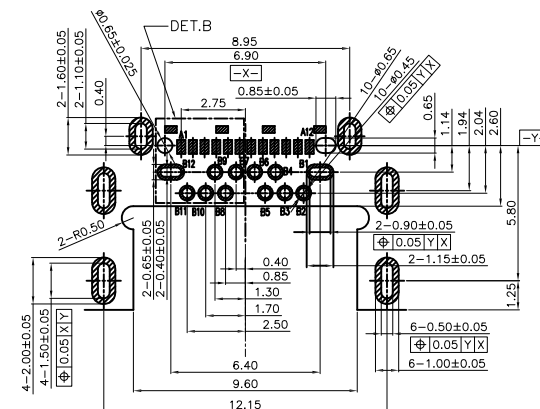

RECOMMENDED PCB LAYOUT

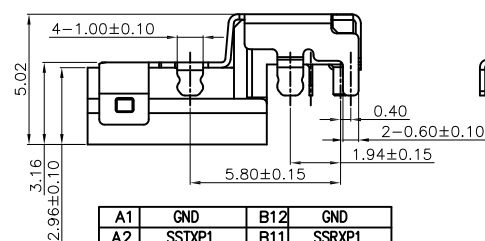

A1	GND	B12	GND
A2	SSTXP1	B11	SSRX1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBUS1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRX2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

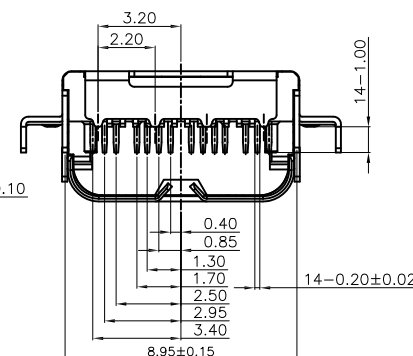

TRANSMISSION EFFICIENCY: 40Gbps

	MM		ANGLE
.X	± .35	X°	± .3°
.XX	± .25	.X°	± 1.5°

DRAWN	JJ	11/24/22
CHECKED	AC1	11/24/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

ADAM TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE			
UNIVERSAL SERIAL BUS TYPE C 4.0, GEN3X2 24PIN, R/A SMT,EDGE HANG, BLACK INSULATOR			
SIZE	PART NO.	REV	
X	USB-C40-S-RA-CS4-EH-BK-T/R	A	
REF:	S00192C	SCALE: NTS	SHEET 1 OF 1