


Surface Mount Type

Series : **HB** Type : **V**

Long life



Features

- Endurance: 105 °C 2000 h
- 5.8 mm height (≤ φ6.3), 5.5 mm height max.
- Vibration-proof product is available upon request. (φ8 mm and larger)
- RoHS compliant

Specifications


Category temperature range	-40 °C to +105 °C								
Rated voltage range	4 V.DC to 50 V.DC								
Capacitance range	1 µF to 470 µF								
Capacitance tolerance	±20 % (120 Hz/+20 °C)								
Leakage current	I ≤ 0.01 CV or 3 (µA) After 2 minutes (Bi-polar I ≤ 0.02 CV or 6 (µA) after 2 minutes) (Whichever is greater)								
Dissipation factor (tan δ)	Please see the attached characteristics list								
Characteristics at low temperature	V.DC	4	6.3	10	16	25	35	50	(Impedance ratio at 120 Hz)
	Z(-25 °C)/Z(+20 °C)	7	4	3	2	2	2	2	
	Z(-40 °C)/Z(+20 °C)	15	8	6	4	4	3	3	
Endurance	After applying rated working voltage for 2000 hours (Bi-polar : 1000 hours for each polarity) at +105 °C±2 °C and then being stabilized at +20 °C, Capacitors shall meet the following limits.								
	Capacitance change	Within ±20 % of the initial value (4 V.DC : ±35 % 6.3 V.DC : ±25 % φ4 to φ6.3), 5.5 mm max. : ±25 %							
	tan δ	≤ 200 % of the initial limit							
	DC leakage current	Within the initial limit							
Shelf life	After storage for 1000 hours at +105 °C±2 °C with no voltage applied and then being stabilized at +20 °C, capacitors shall meet the limits specified in Endurance. (With voltage treatment)								
Resistance to soldering heat	After reflow soldering and then being stabilized at +20°C, capacitors shall meet the following limits.								
	Capacitance change	Within ±10 % of the initial value							
	tan δ	Within the initial limit							
	DC leakage current	Within the initial limit							
AEC-Q200	AEC-Q200 compliant								

Frequency correction factor for ripple current

Frequency (Hz)	50, 60	120	1 k	10 k to
Correction factor	0.70	1.00	1.30	1.70


Marking

Example : 4 V.DC 47 µF
Marking color : BLACK

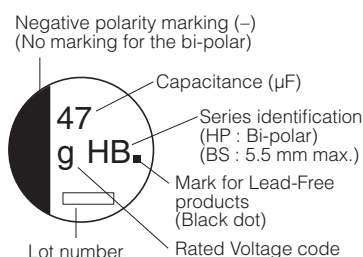

R. Voltage (V.DC)	4	6.3	10	16	25	35	50
Code	g	j	A	C	E	V	H

Dimensions

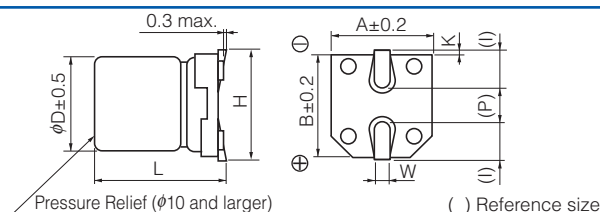

Size code	φD	L	A, B	H	I	W	P	K
B	4.0	5.8±0.3	4.3	5.5 max.	1.8	0.65±0.1	1.0	0.35 ^{+0.15} _{-0.20}
C	5.0	5.8±0.3	5.3	6.5 max.	2.2	0.65±0.1	1.5	0.35 ^{+0.15} _{-0.20}
D	6.3	5.8±0.3	6.6	7.8 max.	2.6	0.65±0.1	1.8	0.35 ^{+0.15} _{-0.20}
E	8.0	6.2±0.3	8.3	9.5 max.	3.4	0.65±0.1	2.2	0.35 ^{+0.15} _{-0.20}
F	8.0	10.2±0.3	8.3	10.0 max.	3.4	0.90±0.2	3.1	0.70±0.20
G	10.0	10.2±0.3	10.3	12.0 max.	3.5	0.90±0.2	4.6	0.70±0.20

● 5.5 mm height max.

Size code	φD	L	A, B	H	I	W	P	K
B	4.0	5.4 ^{+0.2} _{-0.1}	4.3	5.5 max.	1.8	0.65±0.1	1.0	0.35 ^{+0.15} _{-0.20}
C	5.0	5.4 ^{+0.2} _{-0.1}	5.3	6.5 max.	2.2	0.65±0.1	1.5	0.35 ^{+0.15} _{-0.20}
D	6.3	5.4 ^{+0.2} _{-0.1}	6.6	7.8 max.	2.6	0.65±0.1	1.8	0.35 ^{+0.15} _{-0.20}

Characteristics list

Endurance : 105 °C 2000 h

Rated voltage (V.DC)	Cap. (±20 %) (μF)	Case size (mm)		Size code	Specification		Part No.	Reflow	Min. Packaging Q'ty
		φD	L		Ripple current (120 Hz) (+105 °C) (mA r.m.s.)	tan δ (120 Hz) (+20 °C)			Taping (pcs)
4	47	4	5.8	B	34	0.50	EEEHB0G470R	(1)	2000
	100	5	5.8	C	61	0.50	EEEHB0G101R	(1)	1000
	150	6.3	5.8	D	82	0.50	EEEHB0G151P	(1)	1000
	220	6.3	5.8	D	82	0.50	EEEHB0G221P	(1)	1000
6.3	22	4	5.8	B	26	0.30	EEEHB0J220R	(1)	2000
	33	4	5.8	B	29	0.30	EEEHB0J330R	(1)	2000
	47	5	5.8	C	46	0.30	EEEHB0J470R	(1)	1000
	100	6.3	5.8	D	71	0.30	EEEHB0J101P	(1)	1000
	220	8	10.2	F	150	0.35	EEEHB0J221P	(2)	500
	330	8	10.2	F	230	0.35	EEEHB0J331P	(2)	500
10	33	5	5.8	C	43	0.22	EEEHB1A330R	(1)	1000
	100	8	6.2	E	110	0.26	EEEHB1A101P	(2)	1000
	220	8	10.2	F	160	0.26	EEEHB1A221P	(2)	500
	470	10	10.2	G	270	0.26	EEEHB1A471P	(2)	500
16	10	4	5.8	B	28	0.16	EEEHB1C100R	(1)	2000
	22	5	5.8	C	39	0.16	EEEHB1C220R	(1)	1000
	47	6.3	5.8	D	70	0.16	EEEHB1C470P	(1)	1000
	100	8	10.2	F	120	0.20	EEEHB1C101P	(2)	500
	220	10	10.2	G	210	0.20	EEEHB1C221P	(2)	500
	330	10	10.2	G	230	0.20	EEEHB1C331P	(2)	500
25	4.7	4	5.8	B	22	0.14	EEEHB1E4R7R	(1)	2000
	6.8	4	5.8	B	25	0.14	EEEHB1E6R8R	(1)	2000
	33	6.3	5.8	D	65	0.14	EEEHB1E330P	(1)	1000
	47	8	6.2	E	91	0.16	EEEHB1E470P	(2)	1000
	100	8	10.2	F	130	0.16	EEEHB1E101P	(2)	500
	220	10	10.2	G	190	0.16	EEEHB1E221P	(2)	500
35	10	5	5.8	C	28	0.12	EEEHB1V100R	(1)	1000
	22	6.3	5.8	D	55	0.12	EEEHB1V220P	(1)	1000
	33	8	6.2	E	84	0.14	EEEHB1V330P	(2)	1000
	47	8	10.2	F	98	0.14	EEEHB1V470P	(2)	500
	100	10	10.2	G	160	0.14	EEEHB1V101P	(2)	500
50	1	4	5.8	B	10	0.12	EEEHB1H1R0R	(1)	2000
	2.2	4	5.8	B	16	0.12	EEEHB1H2R2R	(1)	2000
	3.3	4	5.8	B	16	0.12	EEEHB1H3R3R	(1)	2000
	4.7	5	5.8	C	23	0.12	EEEHB1H4R7R	(1)	1000
	6.8	5	5.8	C	23	0.12	EEEHB1H6R8R	(1)	1000
	10	6.3	5.8	D	35	0.12	EEEHB1H100P	(1)	1000
	22	8	6.2	E	70	0.12	EEEHB1H220P	(2)	1000
	33	8	10.2	F	91	0.12	EEEHB1H330P	(2)	500
	47	10	10.2	G	100	0.12	EEEHB1H470P	(2)	500

· Please refer to the page of "Reflow Profile" and "The Taping Dimensions".

· When requesting vibration-proof product, please put the last "V" instead to "P"

Characteristics list (Bi-polar)

Endurance : 105 °C 2000 h

Rated voltage (V.DC)	Cap. (±20 %) (μF)	Case size (mm)		Size code	Specification		Part No.	Reflow	Min. Packaging Q'ty
		φD	L		Ripple current (120 Hz) (+105 °C) (mA r.m.s.)	tan δ (120 Hz) (+20 °C)			Taping (pcs)
6.3	47	6.3	5.8	D	35	0.60	EEEHP0J470P	(1)	1000
10	10	4	5.8	B	20	0.44	EEEHP1A100R	(1)	2000
	33	6.3	5.8	D	26	0.44	EEEHP1A330P	(1)	1000
16	10	5	5.8	C	25	0.32	EEEHP1C100R	(1)	1000
25	3.3	4	5.8	B	12	0.28	EEEHP1E3R3R	(1)	2000
	4.7	4	5.8	B	12	0.28	EEEHP1E4R7R	(1)	2000
	10	6.3	5.8	D	28	0.28	EEEHP1E100P	(1)	1000
	22	6.3	5.8	D	55	0.28	EEEHP1E220P	(1)	1000
35	2.2	4	5.8	B	10	0.24	EEEHP1V2R2R	(1)	2000
50	1	4	5.8	B	10	0.24	EEEHP1H1R0R	(1)	2000
	3.3	6.3	5.8	D	16	0.24	EEEHP1H3R3P	(1)	1000
	4.7	6.3	5.8	D	23	0.24	EEEHP1H4R7P	(1)	1000

Characteristics list (5.5 mm max.)

Endurance : 105 °C 2000 h

Rated voltage (V.DC)	Cap. (±20 %) (μF)	Case size (mm)		Size code	Specification		Part No.	Reflow	Min. Packaging Q'ty
		φD	L		Ripple current (120 Hz) (+105 °C) (mA r.m.s.)	tan δ (120 Hz) (+20 °C)			Taping (pcs)
6.3	22	4	5.4	B	26	0.30	EEEBB0J220SR	(1)	2000
	47	5	5.4	C	46	0.30	EEEBB0J470SR	(1)	1000
	100	6.3	5.4	D	71	0.30	EEEBB0J101SP	(1)	1000
10	33	5	5.4	C	43	0.22	EEEBB1A330SR	(1)	1000
16	10	4	5.4	B	28	0.16	EEEBB1C100SR	(1)	2000
	22	5	5.4	C	39	0.16	EEEBB1C220SR	(1)	1000
	47	6.3	5.4	D	70	0.16	EEEBB1C470SP	(1)	1000
25	4.7	4	5.4	B	22	0.14	EEEBB1E4R7SR	(1)	2000
	6.8	4	5.4	B	25	0.14	EEEBB1E6R8SR	(1)	2000
	33	6.3	5.4	D	65	0.14	EEEBB1E330SP	(1)	1000
35	10	5	5.4	C	28	0.12	EEEBB1V100SR	(1)	1000
	22	6.3	5.4	D	55	0.12	EEEBB1V220SP	(1)	1000
50	1	4	5.4	B	10	0.12	EEEBB1H1R0SR	(1)	2000
	2.2	4	5.4	B	16	0.12	EEEBB1H2R2SR	(1)	2000
	3.3	4	5.4	B	16	0.12	EEEBB1H3R3SR	(1)	2000
	4.7	5	5.4	C	23	0.12	EEEBB1H4R7SR	(1)	1000
	6.8	5	5.4	C	23	0.12	EEEBB1H6R8SR	(1)	1000
	10	6.3	5.4	D	35	0.12	EEEBB1H100SP	(1)	1000

· Please refer to the page of "Reflow Profile" and "The Taping Dimensions".

· When requesting vibration-proof product, please put the last "V" instead to "P"

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[EEE-HB0G101R](#) [EEE-HB0G221P](#) [EEE-HB0G470R](#) [EEE-HB0J101P](#) [EEE-HB0J220R](#) [EEE-HB0J330R](#) [EEE-HB0J470R](#) [EEE-HB1A330R](#) [EEE-HB1C100R](#) [EEE-HB1C220R](#) [EEE-HB1C470P](#) [EEE-HB1E330P](#) [EEE-HB1E4R7R](#) [EEE-HB1E6R8R](#) [EEE-HB1H100P](#) [EEE-HB1H1R0R](#) [EEE-HB1H2R2R](#) [EEE-HB1H3R3R](#) [EEE-HB1H4R7R](#) [EEE-HB1H6R8R](#) [EEE-HB1V100R](#) [EEE-HB1V220P](#) [EEE-HP1A100R](#) [EEE-HB1A221P](#) [EEE-HP0J100R](#) [EEE-HP0J220R](#) [EEE-HP1H4R7P](#) [EEE-HB1E221P](#) [EEE-HP0J470P](#) [EEE-HP1A330P](#) [EEE-HP1C100R](#) [EEE-HP1E100P](#) [EEE-HP1E220P](#) [EEE-HP1E3R3R](#) [EEE-HP1E4R7R](#) [EEE-HP1H1R0R](#) [EEE-HP1V2R2R](#) [EEE-HP1H3R3P](#) [EEE-HB0J331P](#) [EEE-HB1C220SR](#) [EEE-HB1E6R8SR](#) [EEE-HB1C221P](#) [EEE-HB1E330SP](#) [EEE-HB1A101P](#) [EEE-HB1H470P](#) [EEE-HB1H220P](#) [EEE-HB0J470SR](#) [EEE-HB1C470SP](#) [EEE-HB1E4R7SR](#) [EEE-HB1C331P](#) [EEE-HB1H330P](#) [EEE-HB1A330SR](#) [EEE-HB1H6R8SR](#) [EEE-HB0J221P](#) [EEE-HB1C101P](#) [EEE-HB1V100SR](#) [EEE-HB1C100SR](#) [EEE-HB1V330P](#) [EEE-HB1A471P](#) [EEE-HB1V101P](#) [EEE-HB1E101P](#) [EEE-HB1H4R7SR](#) [EEE-HB1H1R0SR](#) [EEE-HB1E470P](#) [EEE-HB1V220SP](#) [EEE-HB1H100SP](#) [EEE-HB1V470P](#) [EEE-HB1H3R3SR](#) [EEE-HB1H2R2SR](#) [EEE-HB0G151P](#)