
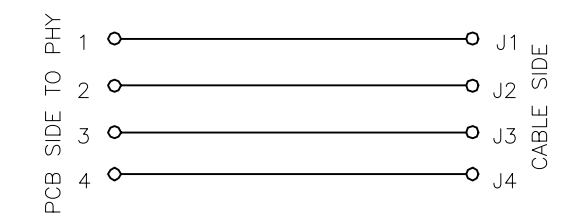


REVISES					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.03.11	阿树

MATERIAL 材料:
HOUSING 外壳: PBT,UL94V-0,BLACK.
TERMINALS BRACKET 端子支架: PBT,UL94V-0,RED.
TERMINAL 端子: PHOSPHOR BRONZE T=0.30MM
GOLD PLATING ON CONTACT AREA.

MECHANICAL 机械:
DURABILITY 耐用性: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE 插入力:2.2KG.F MAX
RETENTION STRENGTH 保持力:7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE 工作温度: -40°C~+85°C.
STORAGE TEMPERATURE 储存温度: -40°C~+85°C.
ALL CRITICAL DIMENSIONS WITH "*"

ELECTRICAL 电气:
VOLTAGE 电压: 125 VOLTS AC.
CURRENT RATING 电流额定值: 1.5AMP.
DIELECTRIC STRENGTH 介电强度: 1000 VAC RMS 50HZ OR 60HZ,1 MIN
INSULATION RESISTANCE 绝缘电阻: 500 MEGA OHMS MIN.INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE 接触电阻:SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER DURABILITY TEST.

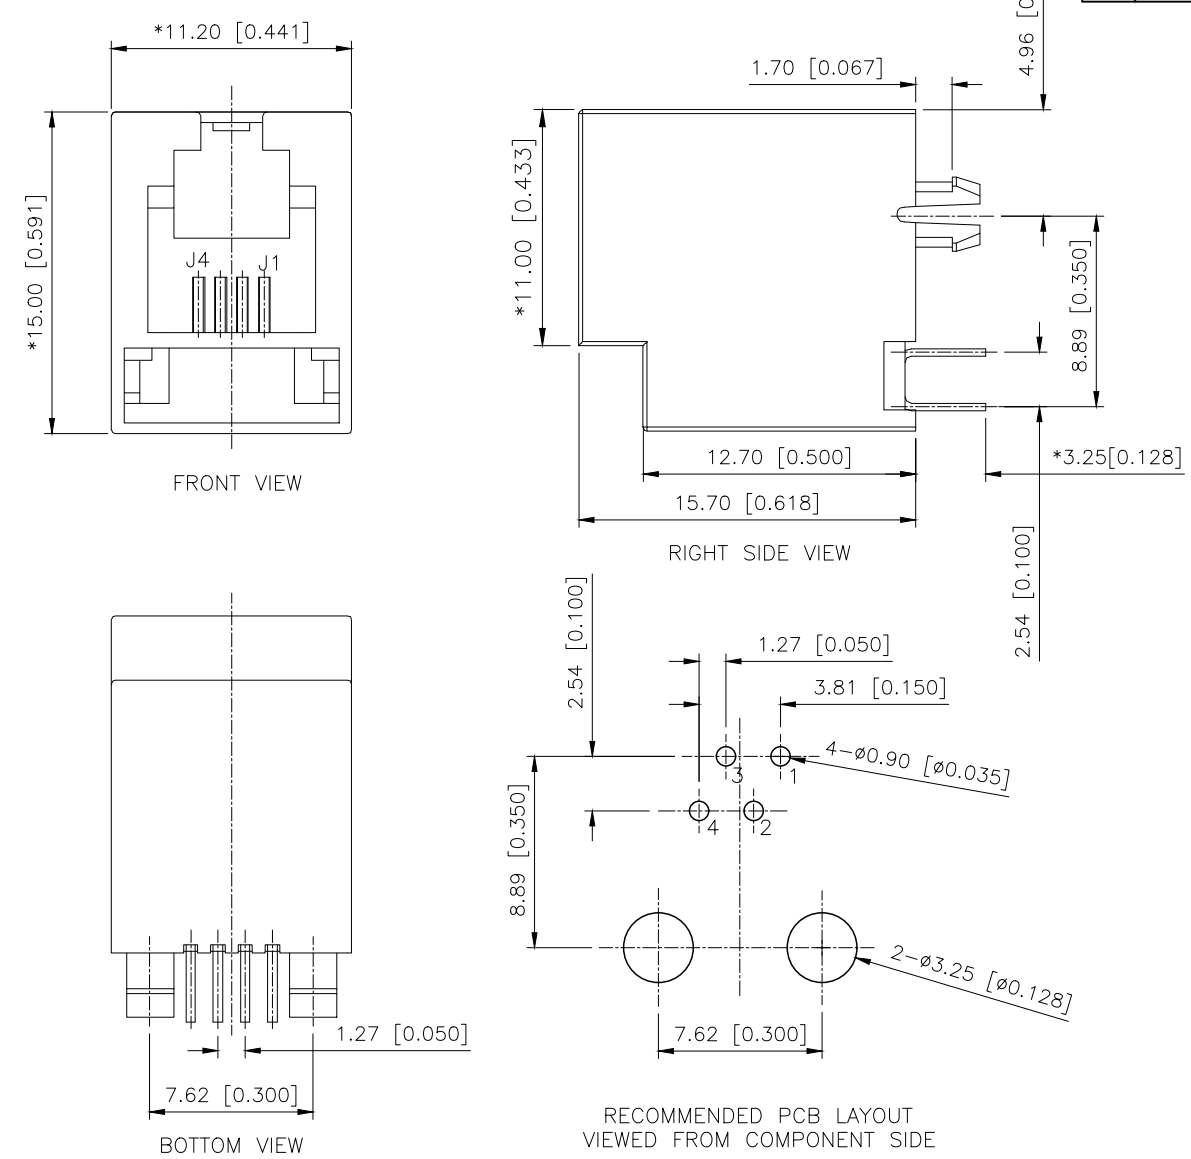

X02AKIWA1DB4134

1:Au=1U"
3:Au=3U"
4:Au=6U"
5:Au=15U"
6:Au=30U"

AuGLAR	±5°		DESIGN	阿树	VIEW: 	MODEL TYPE: RJ JACK		
X.	±0.40		CHECKED		UNIT: mm/in	PART NO.: X02AKIWA1DB4134		
X.x	±0.30		APPROVED		SIZE: A4	DWG NO.:		
X.xx	±0.20							
X.xxx	±0.15							
UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED				SCALE N/A	PAGE 1/1	REVISION A1