

You are here: [Products](#) » [Heatsinks f.cool](#) » [Profile heatsinks and fluid coolers](#) » [Extruded heatsinks for PCB mounting](#) » [SK 105 ...](#) » [SK 105](#)



▼ Heatsinks f.cool

- ▼ Profile heatsinks and fluid coolers
 - Standard extruded heatsinks
 - Extruded heatsinks for lock-in retaining spring
 - [Extruded heatsinks for PCB mounting](#)
 - Extruded heatsinks for DC/DC converter
 - Retaining springs for transistors
 - U-Extruded heatsinks
 - Die-cast heatsinks
 - Fin coolers
 - Fluid coolers
 - Aluminium flat-, quadrangular-, angled-, U- and T-profiles
- Heatsinks and active heatsinks for processors
- Board Level heatsinks
- Cooling aggregates
- Accessories for electronic components
- **Cases f.case**
- **Connectors f.con**

Extruded heatsinks for PCB mounting


SK 105 ...

SK 105 1000 AL

159 x 10 mm, for 19" plug in unit

Data sheet

add to request

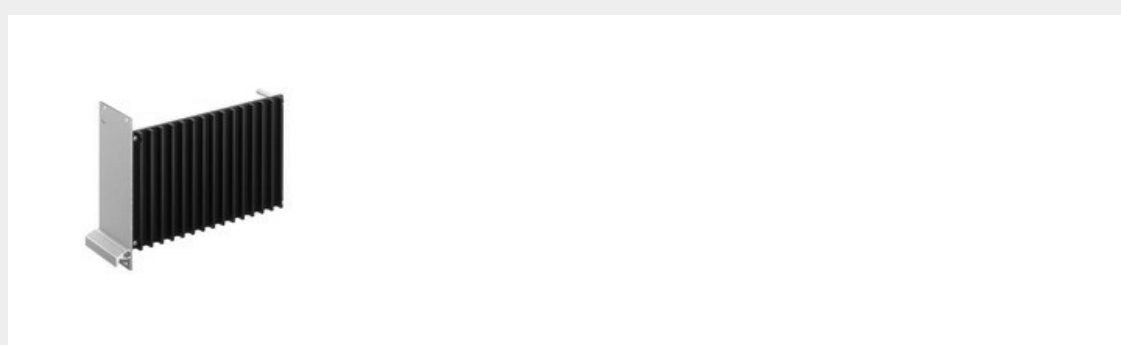

Features

Technical Drawing

Service

Accessories / related products

width B	159 mm
height	10 mm
plate thickness	4 mm
length	1000 mm
thermal resistance R_{th}	3.6 - 1.7 K/W
surface	raw degreased aluminium