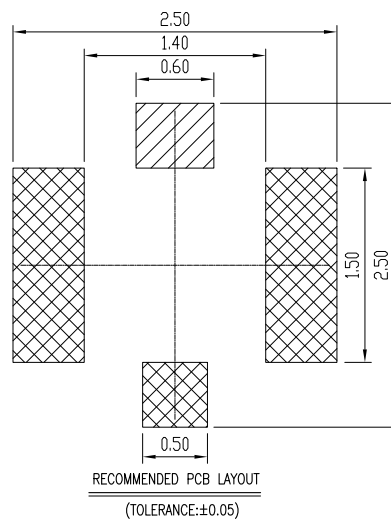
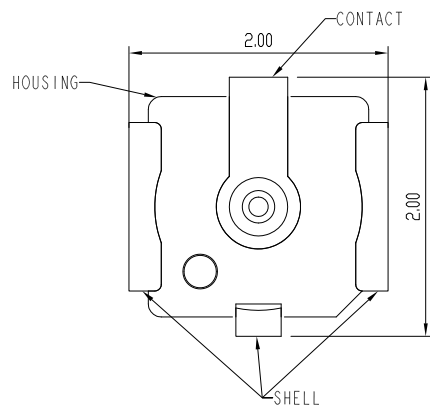
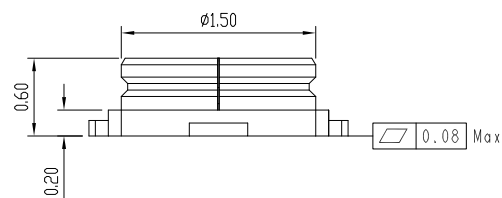





NOTES :

1.0. RATING :

- 1.1. VOITAGE :60 VAC (R.M.S.)
- 1.2. NOMINAL CHARACTERISTIC IMPEDANCE: 50 Ohm
- 1.3. APPLICABLE FREQUENCY: DC ~ 6GHz
- 1.4. VSWR: 1.3 MAX. (DC~3GHz), 1.5 MAX. (3~6GHz)
- 1.5. TEMPERATURE :-40°C TO +85°C

2.0. ALL DIMENSIONS SHOULD BE CONTROLLED IN FAI:

3.0. MARKED ▽ SHOULD BE CONTROLLED BY QIP.:

 深圳市万骏达电子有限公司 http://www.wanjunda.com		图号 (DWG NO)		单位 (UNIT): MM
		本 (REV)		比例 (SCALE) 1:1
		日期 (DATE)		
品名 (ITEM NO)	IPEX天线座 第四代	设计 (DESIGN)		未注公差 TOLERANCE UNSPECIFIED X.X ±0.30 X.XX ±0.15 X.XXX ±0.10 X° ±5° X.X° ±2°
料号 (PART NO)	RF-IPEX-SMT-04	审核 (CHECKED)		
模号 (MODEL NO)		核准 (APPROVED)		