

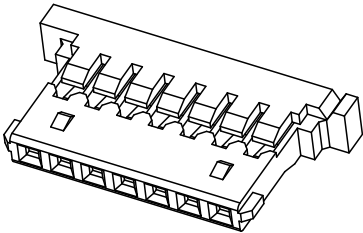
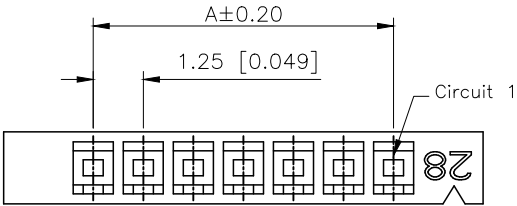


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.03	阿树

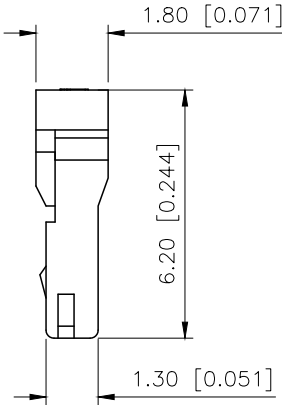



- SPECIFICATIONS
- Voltage rating:125V AC/DC
 - Current rating:1A AC/DC
 - Withstanding Voltage:250V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥100MΩ
 - Contact resistance:≤20mΩ
 - After environmental testing:≤40mΩ

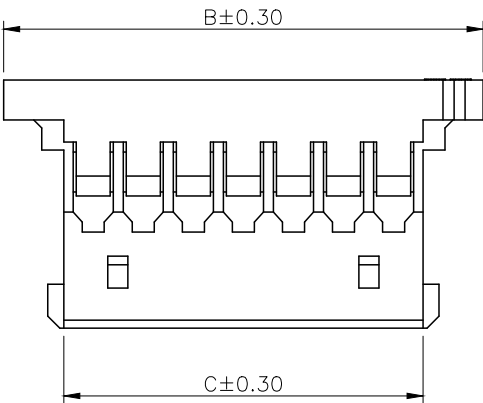

PART NO.:

X9827 H-XX-N0 HF
① ② ③ ④ ⑤

- ①Series No
②Category:H-HSG
③Row No.Pin No:XX-02~30Pin
④Material:N0-PA66 94V0
⑤HF-Halogen free

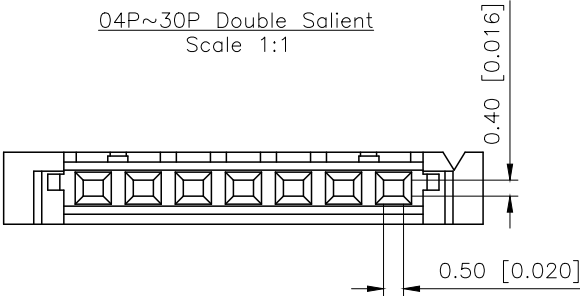

04P~30P Single Salient
Scale 1:2

Poles	Dimensions/mm			Poles	Dimensions/mm		
	A	B	C		A	B	C
02	1.25	5.72	2.72	11	12.50	16.97	13.97
03	2.50	6.97	3.97	12	13.75	18.22	15.22
04	3.75	8.22	5.22	13	15.00	19.47	16.47
05	5.00	9.47	6.47	14	16.25	20.72	17.72
06	6.25	10.72	7.72	15	17.50	21.97	18.97
07	7.50	11.97	8.97	16	18.75	23.22	20.22
08	8.75	13.22	10.22	20	23.75	28.22	25.22
09	10.00	14.47	11.47	25	30.00	34.47	31.47
10	11.25	15.72	12.72	30	36.25	40.72	37.72

X9827H-XX-N0HF	Nylon 66 UL 94V-0 Halogen-Free	X9827T	X9827W
X9827H-XX-N0	Nylon 66 UL 94V-0		
PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 1.25mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.: X9827H-XX-N0
APPROVED		SIZE:	A4	DWG NO.: