
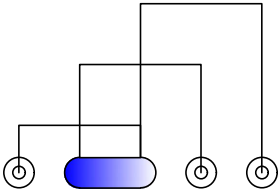


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.17	阿树



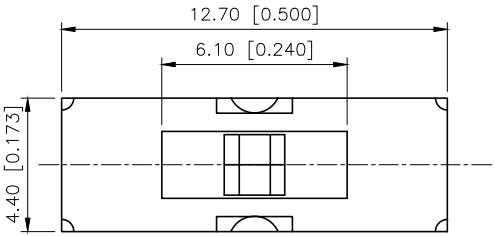


Schematic(shorting)

SS13D75-X

L(mm)
2~10

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISITANCE	100MΩ MAX
TRAVEL	2MM
OPERATING FORCE	250±100gf
OPERATING LIFE	10000

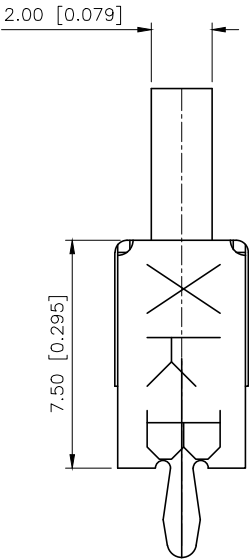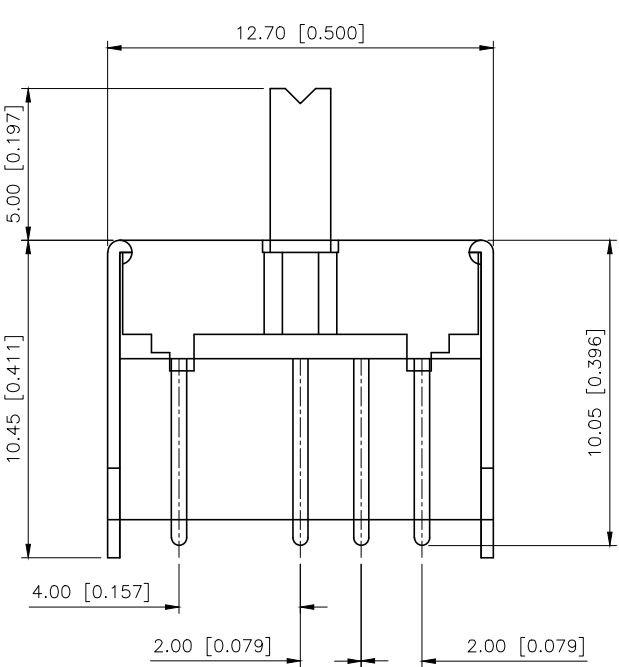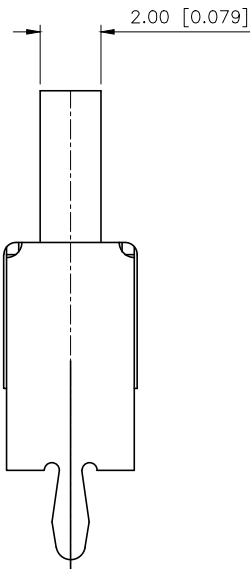

5	Terminal	4	Brass (0.30t)	Ag Plated
4	Contact spring	1	Beryllium copper	
3	Base	1	LCP	
2	Cover	1	Sus	Tin plated
1	Keystake	1	Pa66	
ITEM	PAPT NAME	QTY	MATERIAL	FINISHING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树
CHECKED	
APPROVED	

VIEW:

UNIT: mm/in

SIZE: A4

MODEL TYPE:	SLIDE SWITCH
PART NO.:	SS13D75x
DWG NO.:	