
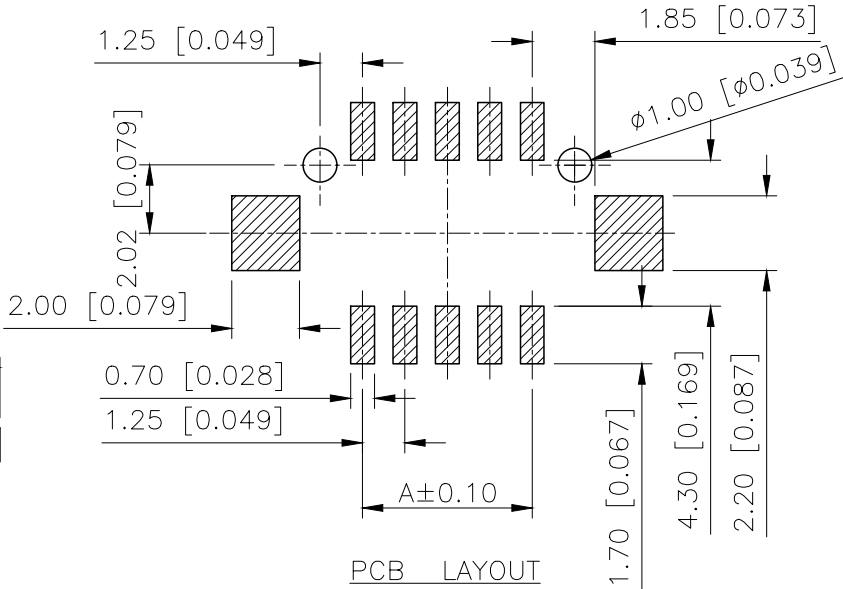

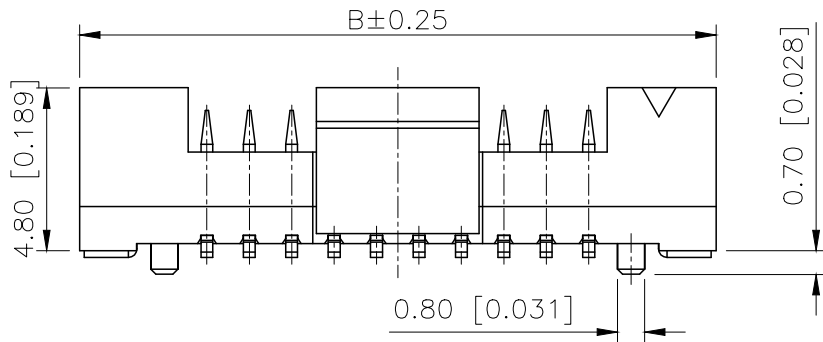


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.19	阿树

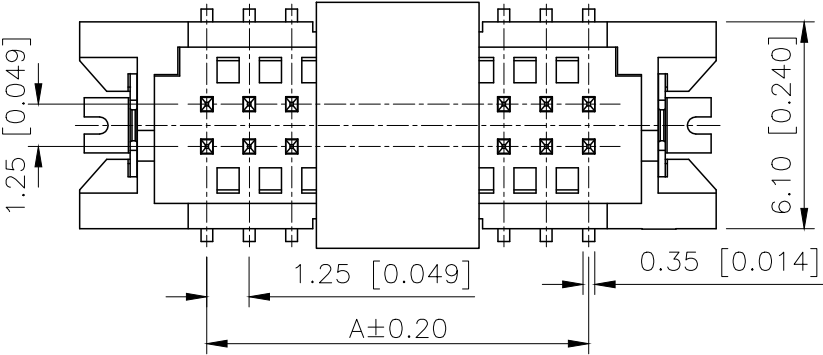

Poles	Dimensions(mm)	
	A	B
2x02	1.25	8.75
2x05	5.00	12.50
2x06	6.25	13.75
2x07	7.50	15.00
2x10	11.25	18.75
2x12	13.75	21.25
2x15	17.50	25.00
2x20	23.75	31.25

PART NO.:

X9812 W V S-2xXX-6T V01
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
②Category:W-Wafer
③Welding Board Angle:V-Stright 180°
④Row No.Pin No:2xXX-2x02~2x20Pin
⑤Special NO: S-SMT
⑥Material:6T-PA6T UL 94V-0 Natural
CAP:PA6T UL 94V-0 Natural
⑦Planting: V01-Gold Flash

■SPECIFICATIONS

- Voltage rating:150V AC/DC
- Current rating:1A AC/DC
- Withstanding Voltage:500V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥500MΩ
- Contact resistance:≤30mΩ

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 1.25mm Crimp Style Connector
CHECKED		UNIT:	mm/in	PART NO.: X9812WVS-2xXX-6TV01
APPROVED		SIZE:	A4	DWG NO.: