

### CHAMP

TE Internal #: 553444-4


Plug, Cable-to-Board, 50 Position, 2.16 mm [.085 in] Centerline, 2 Row, Standard Profile, Vertical, PCB Mount Retention, PCB D-Sub

Connectors

View on TE.com >



Connectors > D-Shaped Connectors > D-Sub Connectors > PCB D-Sub Connectors > D-Sub Plug Assembly: Vertical, Action Pin, 2.16mm

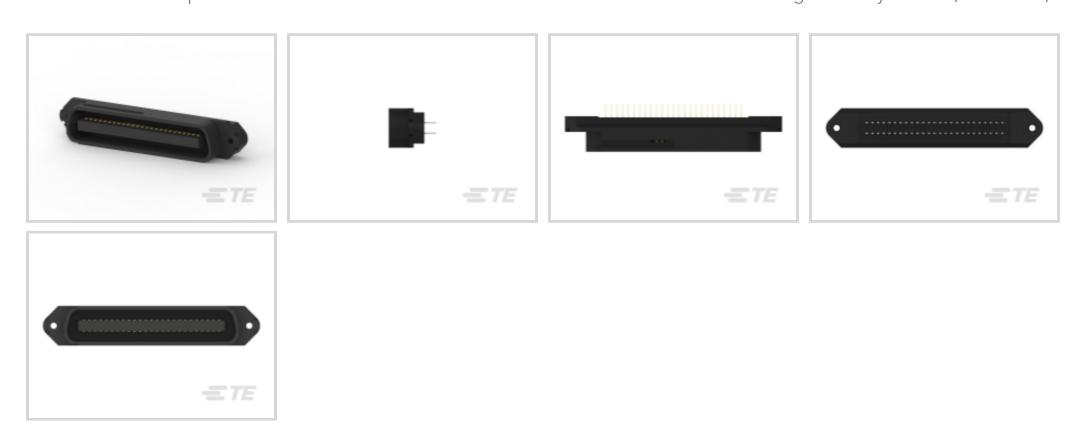

Connector & Housing Type: Plug

Connector System: Cable-to-Board

Number of Positions: 50

Centerline (Pitch): 2.16 mm [.085 in]

Number of Rows: 2

All D-Sub Plug Assembly: Vertical, Action Pin, 2.16mm (4)

### **Features**

### **Product Type Features**

1 Todaet Type Teatares	
Connector & Housing Type	Plug
Connector System	Cable-to-Board
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Positions	50
Number of Rows	2
PCB Mount Orientation	Vertical
Body Features	
Primary Product Color	Black
Connector Profile	Standard
Contact Features	
Contact Options	Installed



Contact Mating Area Plating Material Thickness	.76 µm
Contact Mating Area Plating Material	Gold
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	3 A
Termination Features	
Rectangular Termination Post & Tail Thickness	.48 mm[.018 in]
Rectangular Termination Post & Tail Width	.66 mm[.026 in]
Termination Method to PCB	Through Hole - Press-Fit
Mechanical Attachment	
Mounting Hole Diameter	3.3 mm
Panel Attachment Style	Rear Mount
PCB Mount Retention	With
PCB Mount Retention Type	Action/Compliant Tail
Mating Retention	Without
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	Polyester
Centerline (Pitch)	2.16 mm[.085 in]
Dimensions	
PCB Thickness (Recommended)	1.57 – 3.18 mm[.062 – .125 in]
Row-to-Row Spacing	4.06 mm[.16 in]
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Shielded	No
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	20
Packaging Method	Tray



### **Product Compliance**


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# Compatible Parts





## **Customers Also Bought**






TE Part #640456-9
09P MTA100 HDR ASSY F/L SQ STR









TE Part #640445-3 03P MTA156 HDR ASSY FL/STR SN



TE Part #1-1123723-7
3.96 EP HDR ASSY 7P(NATURAL)



### **Documents**

### **Product Drawings**

PLUG ASSY, ACTION PIN, CHAMP-LOK

English

### **CAD Files**

**Customer View Model** 

ENG\_CVM\_CVM\_553444-4\_V.2d\_dxf.zip

English

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_553444-4\_V.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_553444-4\_V.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

### **Product Specifications**

**Application Specification** 

English

**Application Specification** 

English

**CHAMP Action Pin Connectors** 

English

**Instruction Sheets** 

Plug, Cable-to-Board, 50 Position, 2.16 mm [.085 in] Centerline, 2 Row, Standard Profile, Vertical, PCB Mount Retention, PCB D-Sub Connectors



Instruction Sheet (U.S.)

English

AMP CHAMP ACTION PIN Connectors (Preloaded)

English

Agency Approvals

**CSA Certificate** 

English