

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.11.30	阿树

Specifications:
Voltage rating:600V AC/DC
Current rating:23A AC/DC
Withstanding voltage:2200V AC/minute
Temperature range:-40℃-+125℃
Insulation resistance:≥1000MΩ
Contact resistance:≤2mΩ
After environmental testing:≤10mΩ
Plug the Pin & Special No.:
H-High conductive Brass

PART NO.:


X5700 W V-2xXX-LP SW
① ② ③ ④ ⑤ ⑥

- ①Series No
- ②Category:W-Wafer
- ③Welding Board Angle:V-Stright 180°
- ④Row No.Pin No:2xXX-2x02~2x06Pin
- ⑤Material:LP-LCP UL94V-0
- ⑥Planting: SW-Matte tin plating

Poles	Dimensions(mm)		
	A	B	C
2x01	8.35	/	12.34
2x02	12.05	5.70	16.04
2x03	17.75	11.40	21.74
2x04	23.45	17.10	27.44
2x05	29.15	22.80	33.14
2x06	34.85	28.50	38.84

X5700WV-2xXX-LPSW	High conductive Brass	X5700H	X5700T
PART NO	Material	Suitable XKB Housing	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	

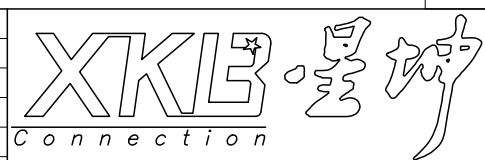

DESIGN	阿树	VIEW:	
CHECKED		UNIT:	mm/in
APPROVED		SIZE:	A4

MODEL TYPE:	Wire to board connector
PART NO.:	X5700WV-2xXX-LPSW
DWG NO.:	

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1

