

A

B

C

D

E

F

G

A

B

C

D

E

F

G

12345678910

MAPX

MODIFICATION

DATE

NOTES:

1. HOUSING: SEE NOTES, UL94V-0 .
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

SPECIFICATION:





1. ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: 30MΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN
2. MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N (3.57KGF) MAX
EXTRACTION FORCE: 10~35N (1.02~3.57KGF) MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE: 10~35N
5000 CYCLES MIN
5000 CYCLES EXTRACTION FORCE: 3~35N

3. ENVIRONMENTAL:

OPERATING TEMPERATURE: -55℃+85℃

4. Contact finish:

- 01: Selective Gold Flash
02: Selective Gold 3U"
03: Selective Gold 5U"
04: Selective Gold 15U"
05: Selective Gold 30U"

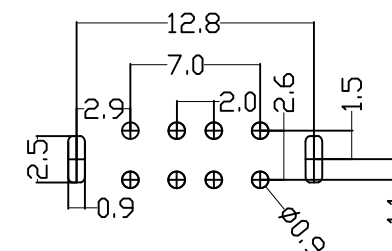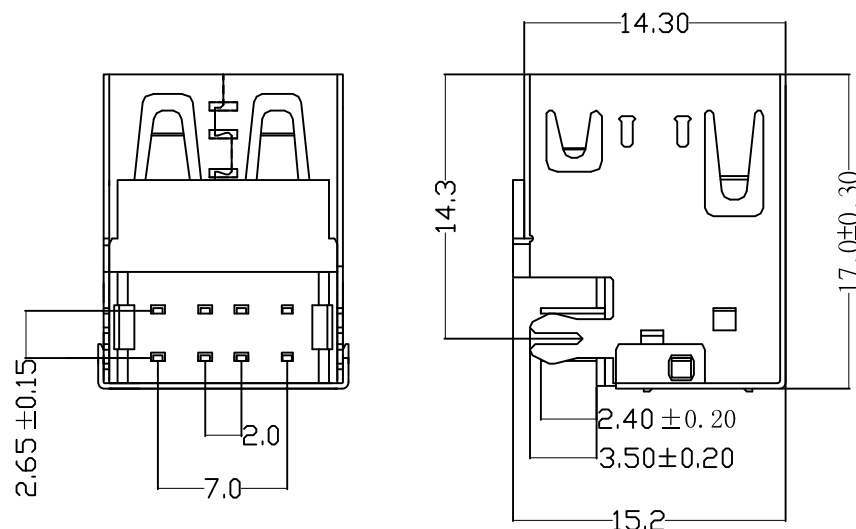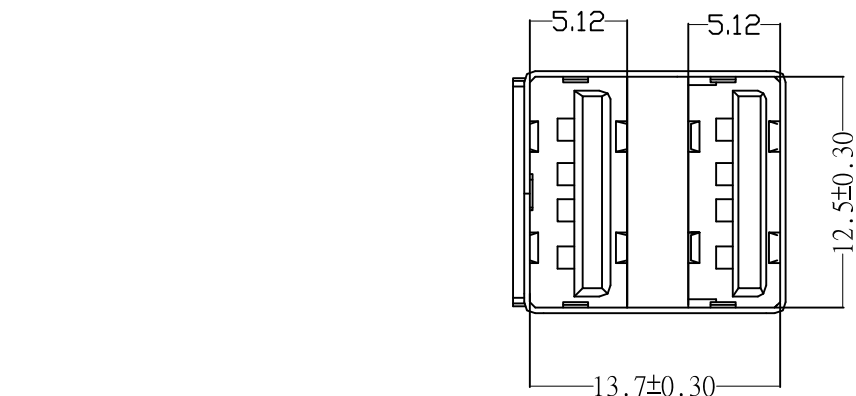

RBCOMMENDBD P.C.B PATTBRN LAY OUT

产品图



PRODUCT CHART DWG

公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	907-421A1026P10200
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	AF90度双层17.0沉板鱼叉脚无边铁壳黑胶24H
日期 DATE	2021-04-13	核准 APPD	黄国荣	角法 VIEW	
				版本 VER	A0

12345678910

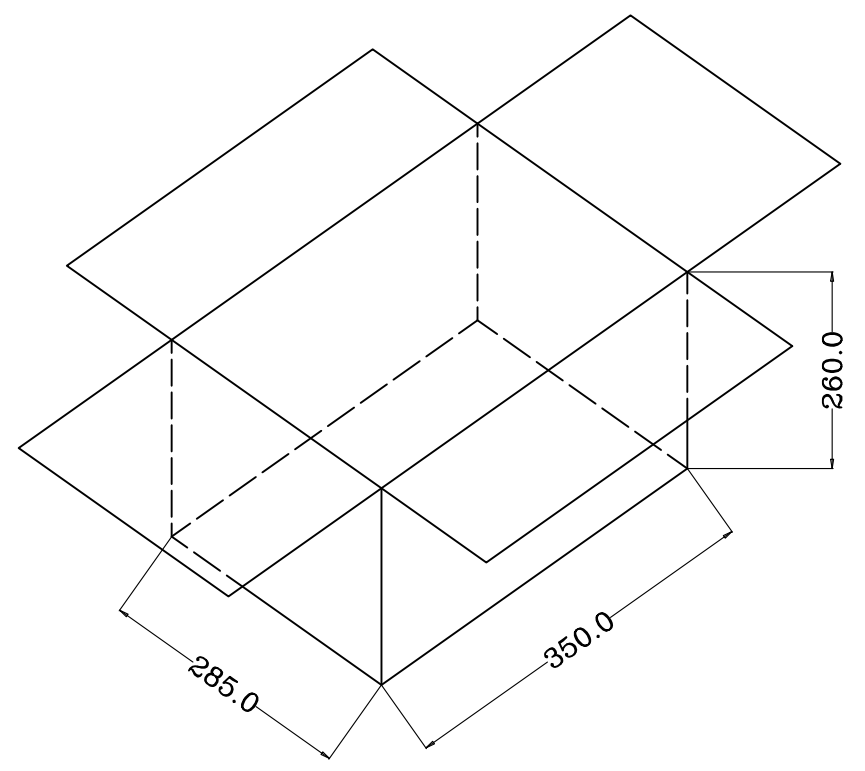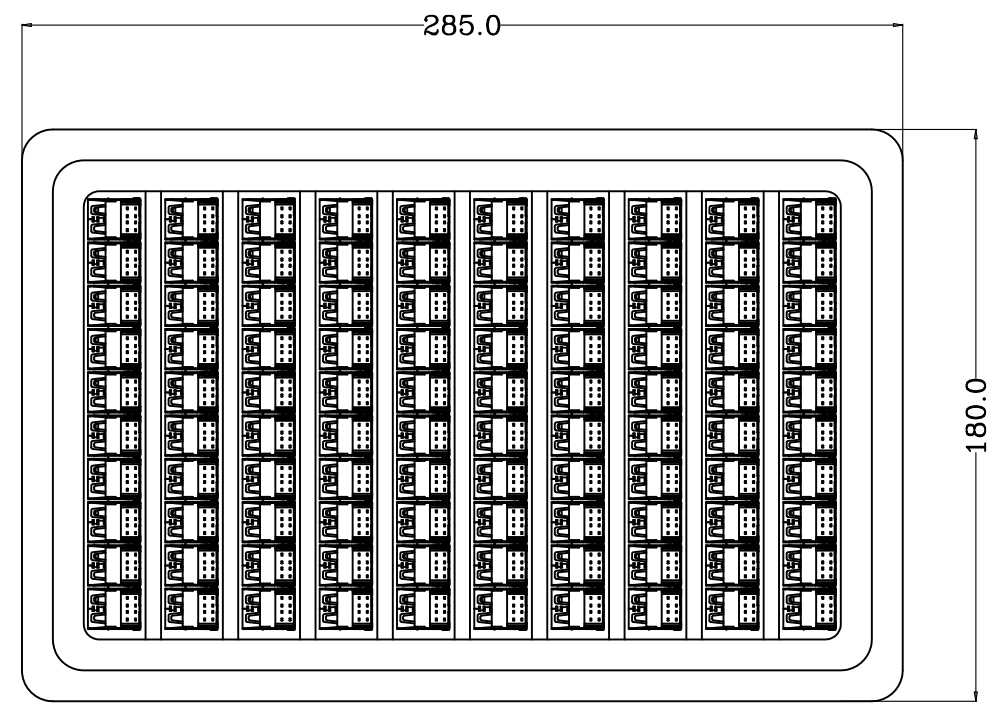

- 1, 包装盒为PVC透明吸塑盒
- 2, 每盒包装数量为100PCS
- 3, 每箱包装数量为3000PCS
- 4, 纸箱规格为350*285*260MM
- 5, 100PCS*10盘*2捆
- 6, 100PCS*5盘*2捆

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	907-421A1026P10200
X.	±1.00	X.	±5.°	比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	AF90度双层17.0沉板鱼叉脚无边铁壳黑胶24H
.X	±0.80	.X	±2.°	日期 DATE	2021-04-13	核准 APPD	黄国荣	角法 VIEW	
.XX	±0.50	.XX	±1.°					版本 VER	A0
.XXX	±0.30	.XXX	±0.5°						