

Features

- Wide supply voltage range from 1.65V to 5.5V
- Inputs Accept Voltages to 5.5V
- I_{OFF} supports partial-power-down mode
- Low power consumption, I_{CC}=10μA (Max)
- ESD Protection Exceeds JESD 22
 - 2000-V Human-Body Model (A114-A)
 - 200-V Machine Model (A115-A)
 - 1000-V Charged-Device Model (C101)

General Description


The SN74LVC1G0832DBVR-TP device is a single 3-input positive AND-OR gate. it performs the Boolean function $Y=(A \cdot B) + C$ in positive logic.

By tying one input to GND or VCC, the device offers two more functions. When C is tied to GND, this device performs as a 2-input AND gate ($Y=A \cdot B$). When A is tied to VCC, the device works as a 2-input OR gate ($Y=B+C$). This device also works as a 2-input OR gate when B is tied to VCC ($Y=A+C$).

Applications

- AV Receiver
- Audio Dock: Portable
- Blu-ray Player and Home Theater
- Embedded PC
- Personal Digital Assistant(PDA)
- Power: Telecom/Server AC/DC Supply: Single Controller: Analog and Digital


Logic Diagram

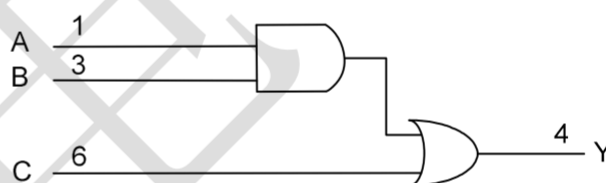

Ordering Information

ORDER NUMBER	PACKAGE DESCRIPTION	PACKAGE OPTION
SN74LVC1G0832DBVR-TP	SOT23-6	Tape and Reel, 3000

Pin Configuratio

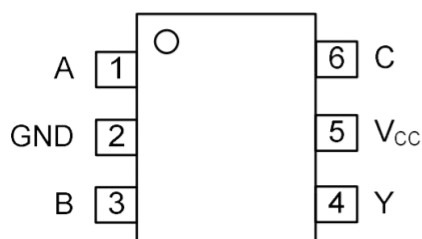

SOT23-6

Function Table

INPUT			OUTPUT(Y)
A	B	C	Y
X	X	H	H
H	H	X	H
X	L	L	L
L	X	L	L

Note: H: High voltage level; L: Low voltage level; X: Valid H or L

ABSOLUTE MAXIMUM RATINGS (unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Supply Voltage		V_{CC}	-0.5 ~ +6.5	V
Input Voltage		V_{IN}	-0.5 ~ +6.5	V
Output Voltage	Output in the high or low state	V_{OUT}	-0.5 ~ $V_{CC}+0.5$	V
	Output in the power-off state		-0.5 ~ +6.5	V
V_{CC} or GND Current		I_{CC}	±100	mA
Continuous Output Current ($V_{OUT}=0$ to V_{CC})		I_{OUT}	±50	mA
Input Clamp Current ($V_{IN}<0$)		I_{IK}	-50	mA
Output Clamp Current ($V_{OUT}<0$)		I_{OK}	-50	mA
Storage Temperature Range		T_{STG}	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

RECOMMENDED OPERATING CONDITIONS (Unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V_{CC}	Operating	1.65	--	5.5	V
		Data retention only	1.5	--		V
Input Voltage	V_{IN}		0	--	5.5	V
Output Voltage	V_{OUT}		0	--	V_{CC}	V
High-level input voltage	V_{IH}	$V_{CC}=1.8\pm0.15V$	$0.65\times V_{CC}$	--	5.5	V
		$V_{CC}=2.5\pm0.2V$	1.7	--	5.5	V
		$V_{CC}=3.3\pm0.3V$	2	--	5.5	V
		$V_{CC}=5\pm0.5V$	$0.7\times V_{CC}$	--	5.5	V
Low-level input voltage	V_{IL}	$V_{CC}=1.8\pm0.15V$	0	--	$0.35\times V_{CC}$	V
		$V_{CC}=2.5\pm0.2V$	0	--	0.7	V
		$V_{CC}=3.3\pm0.3V$	0	--	0.8	V
		$V_{CC}=5\pm0.5V$	0	--	$0.3\times V_{CC}$	V
Input Transition Rise or Fall Rate	$\Delta t/\Delta v$	$V_{CC}=1.8V\pm0.15V, 2.5V\pm0.2V$	--	--	20	ns/V
		$V_{CC}=3.3V\pm0.3V$	--	--	10	ns/V
		$V_{CC}=5V\pm0.5V$	--	--	5	ns/V
Operating Temperature	T_A		-40	--	125	°C

ELECTRICAL CHARACTERISTICS

($V_{CC}=3.3V$, $T_A=25^{\circ}C$, Unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
High-Level Output Voltage	V_{OH}	$V_{IN}=5.5V$ or GND	$V_{CC}=1.65 \sim 5.5V$, $I_{OH}=-100\mu A$	$V_{CC}-0.1$	--	V
			$V_{CC}=1.65V$, $I_{OH}=-4mA$	1.2	--	V
			$V_{CC}=2.3V$, $I_{OH}=-8mA$	1.9	--	V
			$V_{CC}=3.0V$ $I_{OH}=-16mA$	2.4	--	V
			$I_{OH}=-24mA$	2.3	--	V
			$V_{CC}=4.5V$, $I_{OH}=-32mA$	3.8	--	V
Low-Level Output Voltage	V_{OL}	$V_{IN}=5.5V$ or GND	$V_{CC}=1.65 \sim 5.5V$, $I_{OL}=100\mu A$	--	--	0.1 V
			$V_{CC}=1.65V$, $I_{OL}=4mA$	--	--	0.45 V
			$V_{CC}=2.3V$, $I_{OL}=8mA$	--	--	0.3 V
			$V_{CC}=3.0V$ $I_{OL}=16mA$	--	--	0.4 V
			$I_{OL}=24mA$	--	--	0.55 V
			$V_{CC}=4.5V$, $I_{OL}=32mA$	--	--	0.55 V
Input Leakage Current (A, B or C inputs)	$I_{I(LEAK)}$	$V_{CC}=0 \sim 5.5V$, $V_{IN}=5.5V$ or GND	--	--	± 5	μA
Power OFF Leakage Current	I_{off}	$V_{CC}=0V$, V_{IN} or $V_{OUT}=5.5V$	--	--	± 10	μA
Quiescent Supply Current	I_{CC}	$V_{CC}=1.65 \sim 5.5V$, $V_{IN}=5.5V$ or GND, $I_{OUT}=0A$	--	--	10	μA
Additional Quiescent Supply Current Per Input Pin	ΔI_{CC}	$V_{CC}=3 \sim 5.5V$, One input at $V_{CC}-0.6V$, Other inputs at V_{CC} or GND	--	--	500	μA
Input Capacitance	C_I	$V_{CC}=3.3V$, $V_{IN}=V_{CC}$ or GND	--	7	--	pF

SWITCHING CHARACTERISTICS

($T_A = 25^\circ\text{C}$, Unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Propagation delay from input (A, B or C) to output(Y)	t_{PD}	$C_L = 15\text{pF}$, $R_L = 1\text{M}\Omega$	$V_{CC} = 1.8 \pm 0.15\text{V}$	3.7	--	14	ns
			$V_{CC} = 2.5 \pm 0.2\text{V}$	2.4	--	7	ns
			$V_{CC} = 3.3 \pm 0.3\text{V}$	1.7	--	5	ns
			$V_{CC} = 5 \pm 0.5\text{V}$	1.2	--	3.4	ns
		$C_L = 30\text{pF}$, $R_L = 1\text{K}\Omega$	$V_{CC} = 1.8 \pm 0.15\text{V}$	2.5	--	17.5	ns
			$V_{CC} = 2.5 \pm 0.2\text{V}$	1.8	--	7.6	ns
		$C_L = 50\text{pF}$, $R_L = 500\Omega$	$V_{CC} = 3.3 \pm 0.3\text{V}$	1.8	--	5.9	ns
			$V_{CC} = 5 \pm 0.5\text{V}$	1.3	--	4.5	ns

OPERATING CHARACTERISTICS

($f = 10\text{MHz}$, $T_A = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance	C_{PD}	$V_{CC} = 1.8\text{V}$	--	15	--	pF
		$V_{CC} = 2.5\text{V}$	--	15	--	pF
		$V_{CC} = 3.3\text{V}$	--	16	--	pF
		$V_{CC} = 5\text{V}$	--	18	--	pF

THERMAL DATA


PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	SOT23-6	θ_{JA}	230	$^\circ\text{C/W}$
			350	$^\circ\text{C/W}$

FUNCTION SELECTION TABLE


LOGIC FUNCTION
2-Input AND Gate
2-Input OR Gate
$Y = (A \cdot B) + C$

LOGIC FUNCTION

2-Input AND Gate

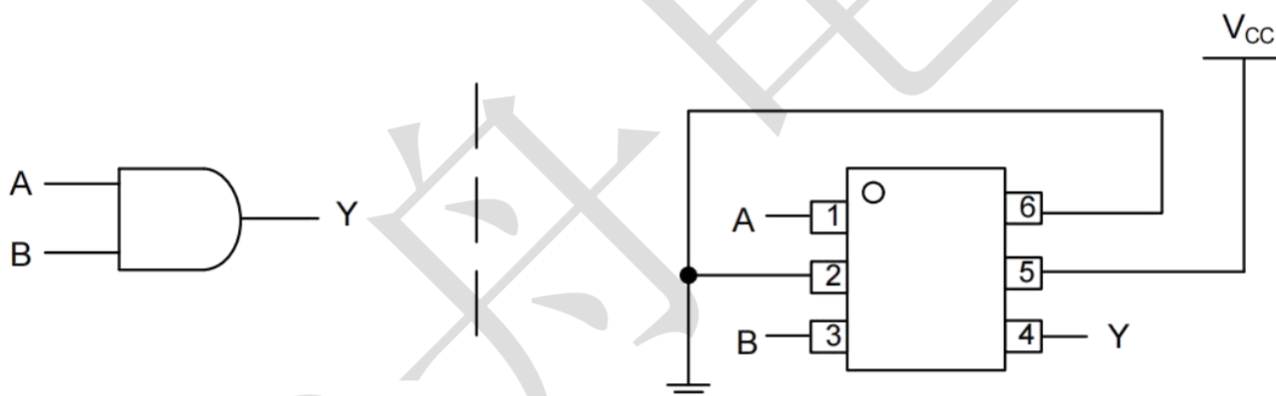

2-Input OR Gate

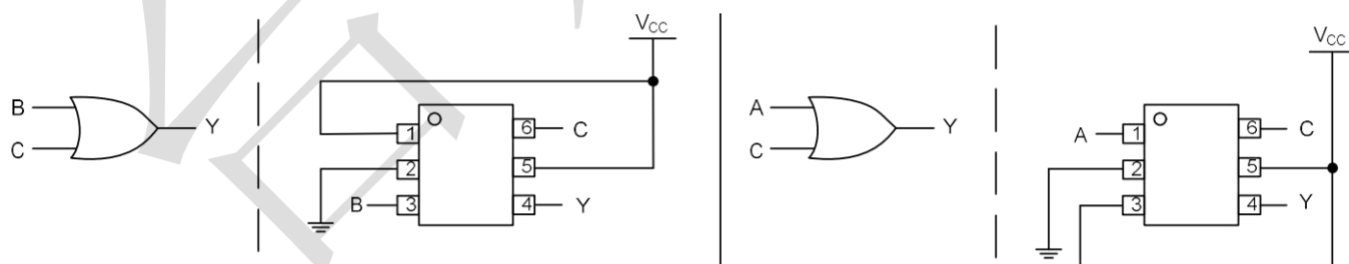


$Y = (A \cdot B) + C$




TEST CIRCUIT AND WAVEFORMS

From Output

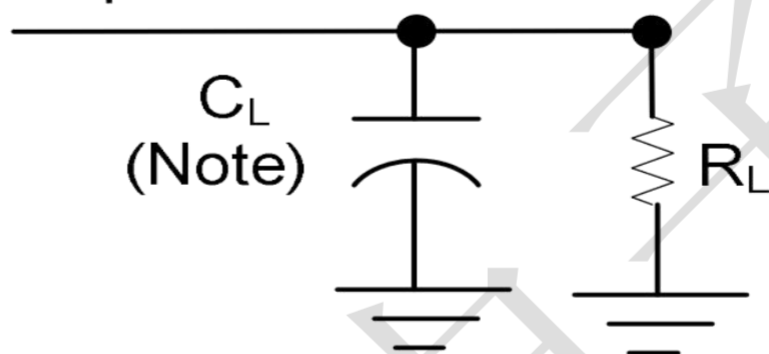

Note: C_L includes probe and jig capacitance.

V_{CC}	Inputs		V_M	C_L	R_L	V_{Δ}
	V_{IN}	t_R, t_F				
$1.8V \pm 0.15V$	V_{CC}	$\leq 2ns$	$V_{CC}/2$	15, 30pF	1M Ω , 1k Ω	0.15V
$2.5V \pm 0.2V$	V_{CC}	$\leq 2ns$	$V_{CC}/2$	15, 30pF	1M Ω , 500 Ω	0.15V
$3.3V \pm 0.3V$	3V	$\leq 2.5ns$	1.5V	15, 50pF	1M Ω , 500 Ω	0.3V
$5V \pm 0.5V$	V_{CC}	$\leq 2.5ns$	$V_{CC}/2$	15, 50pF	1M Ω , 500 Ω	0.3V

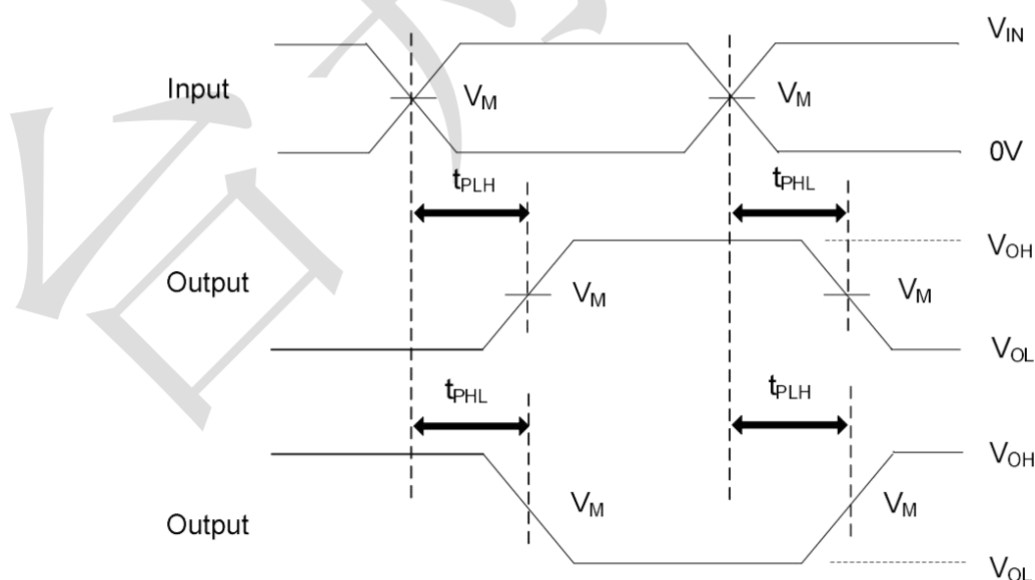


PROPAGATION DELAY TIMES

Notes: 1. C_L includes probe and jig capacitance.

2. All input pulses are supplied by generators having the following characteristics: PRR $\leq 10MHz$, $Z_O = 50\Omega$.

Package information

SOT23-6 (Unit: mm)

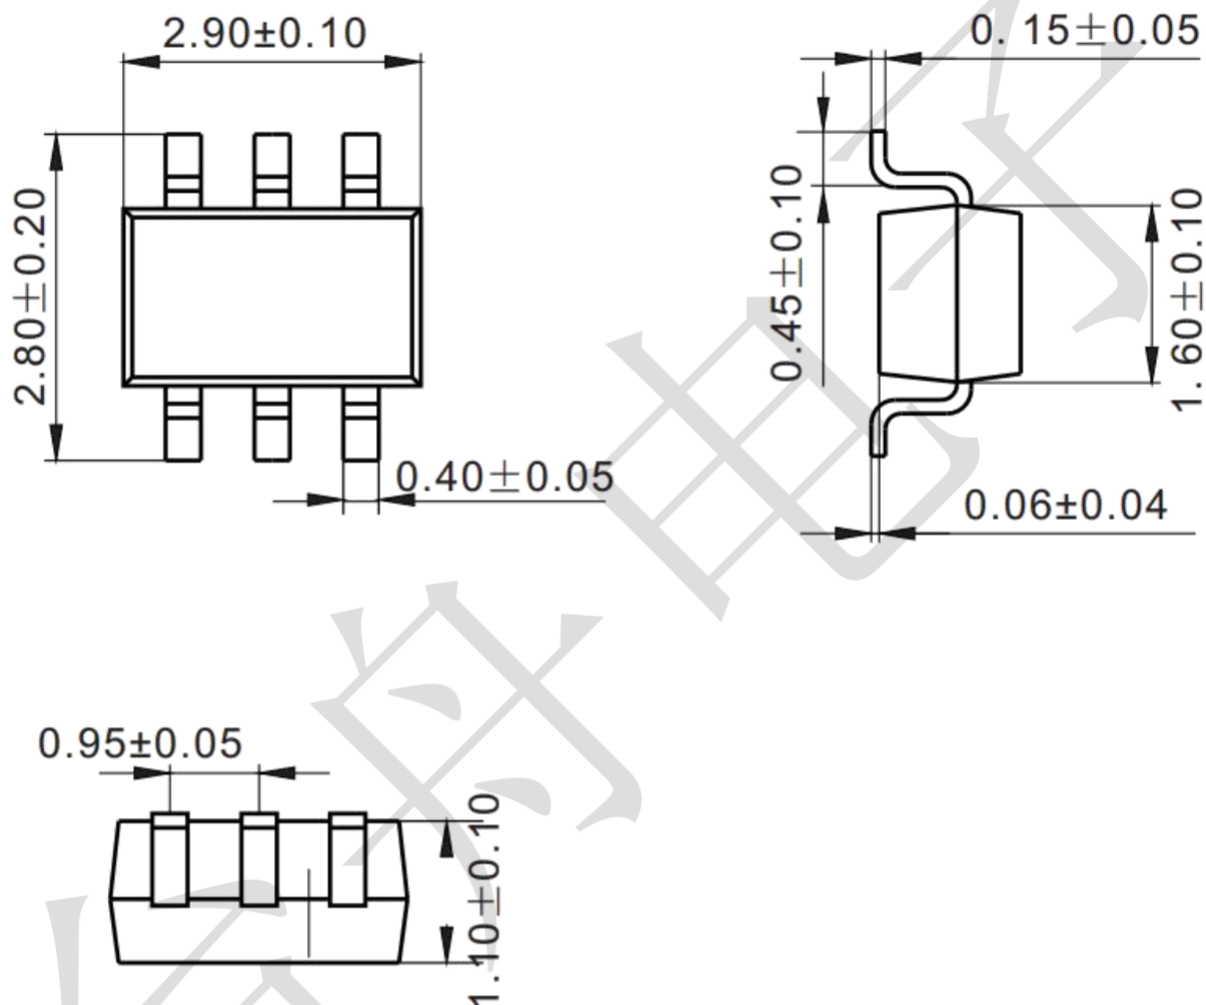

Mounting Pad Layout (unit: mm)

