
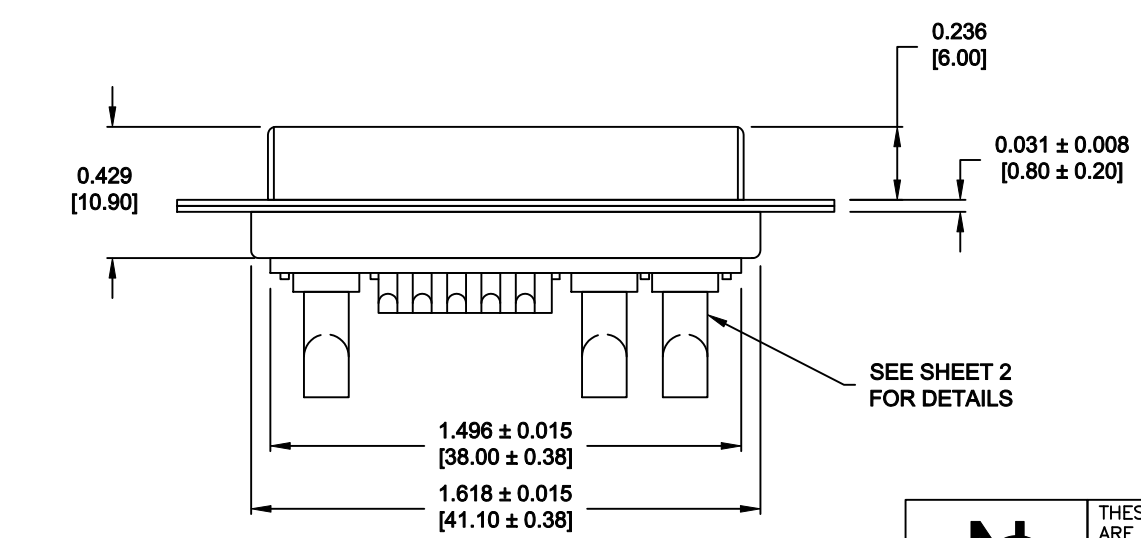


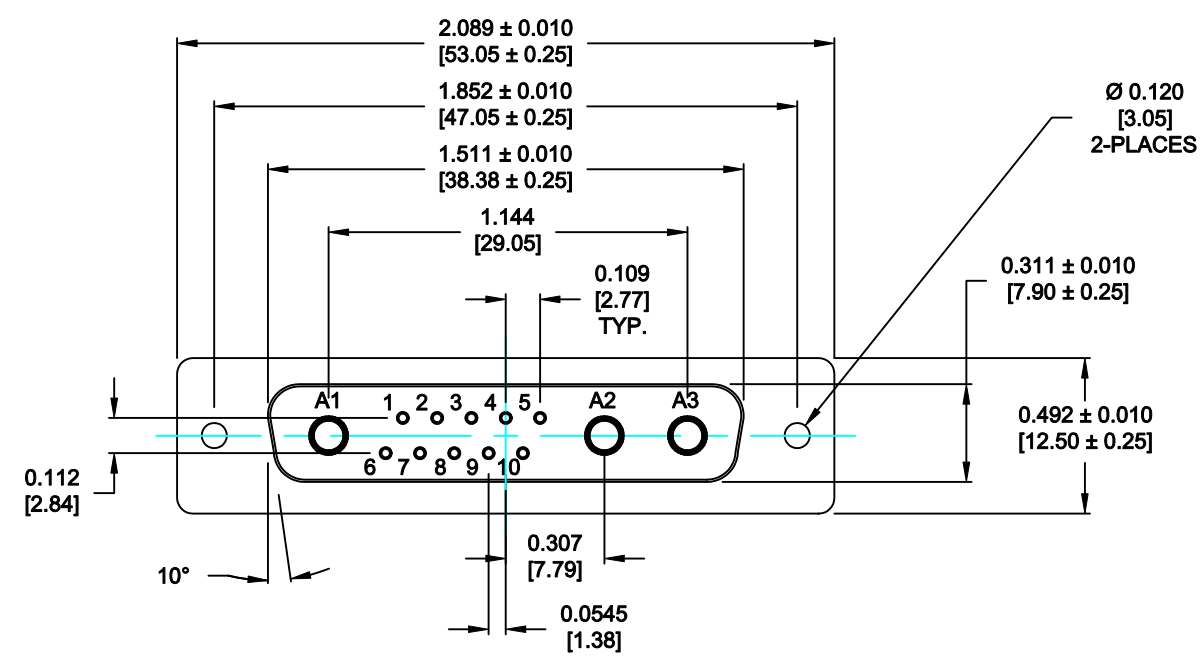

SPECIFICATIONS:

ELECTRICAL:
INSULATOR RESISTANCE: 5 G OHMS Min.
DIELECTRIC WITHSTANDING: 1,000VACfor 1 MINUTE
OPERATING TEMPERATURE: -55° C ~ +155° C
POWER CONTACT RESISTANCE: 1.0 Milliohms Max.
SIGNAL CONTACT RESISTANCE: 2.7 Milliohms Max.
POWER PINS: SEE PART No. BELOW
SIGNAL PINS: 5 AMPS

MECHANICAL:
CONTACT INSERTION FORCE: 4.5 Kg Max.
CONTACT SEPARATOR FORCE: 0.3Kg Min.

MATERIALS:
CONTACTS: COPPER ALLOY
INSULATOR: PBT UL94V-0 RATED, BLK
230°C PROCESS TEMP.
STEEL

FINISH:
SHELL: NICKEL
CONTACTS: FULL GOLD FLASH

680M13W3203LYY1


20 = 20 AMPS
40 = 40 AMPS

M = MACHINED CONTACTS


RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: M. SIGMON		DATE: 08-20-12		
		CHECKED:		DATE:		
NorComp		SCALE: N.T.S.	SHEET 1		OF 2	REV 0
		DWG NO. 680M13W3203LYY1				


NOTE:
SIGNAL AND POWER CONTACTS
COME PRE-LOADED INTO INSULATORS

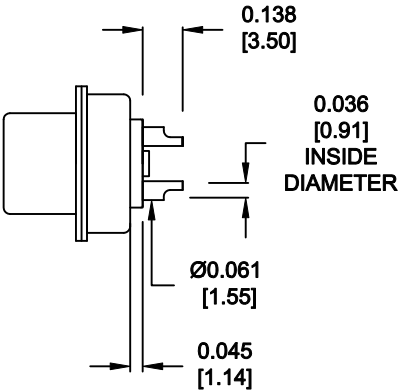

SIGNAL CONTACTS
ACCEPTS UP TO 20 AWG WIRE

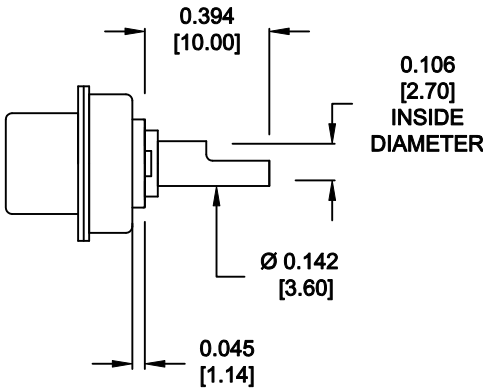

20 AMP POWER CONTACTS
ACCEPTS UP TO 12 AWG WIRE

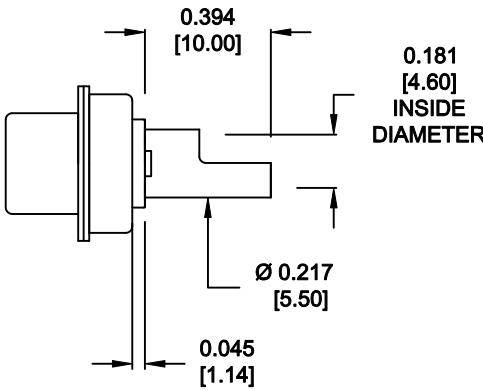

40 AMP POWER CONTACTS
ACCEPTS UP TO 8 AWG WIRE

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: M. SIGMON		DATE: 08-20-12	
		CHECKED:		DATE:	
NorComp		SCALE: N.T.S.	SHEET 2		OF 2
		REV 0			
		DWG NO. 680M13W3203LYY1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NorComp:](#)

[680M13W3203L401](#) [680M13W3203L201](#)