

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT — By — ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

変更

P

LTR

DESCRIPTION

DATE


DWN

APVD

注記
NOTE

2 嵌合相手製品型番及び、嵌合時寸法は
MATING COUNTER PART NUMBER AND DIMENSIONS
表-1 参照のこと。
AFTER MATING: SEE TABLE 1.

△ 仕上げ : ニッケル下地錫めっき(後めっき)
FINISH ; TIN PL.
Ni UNDER PL. ALL OVER

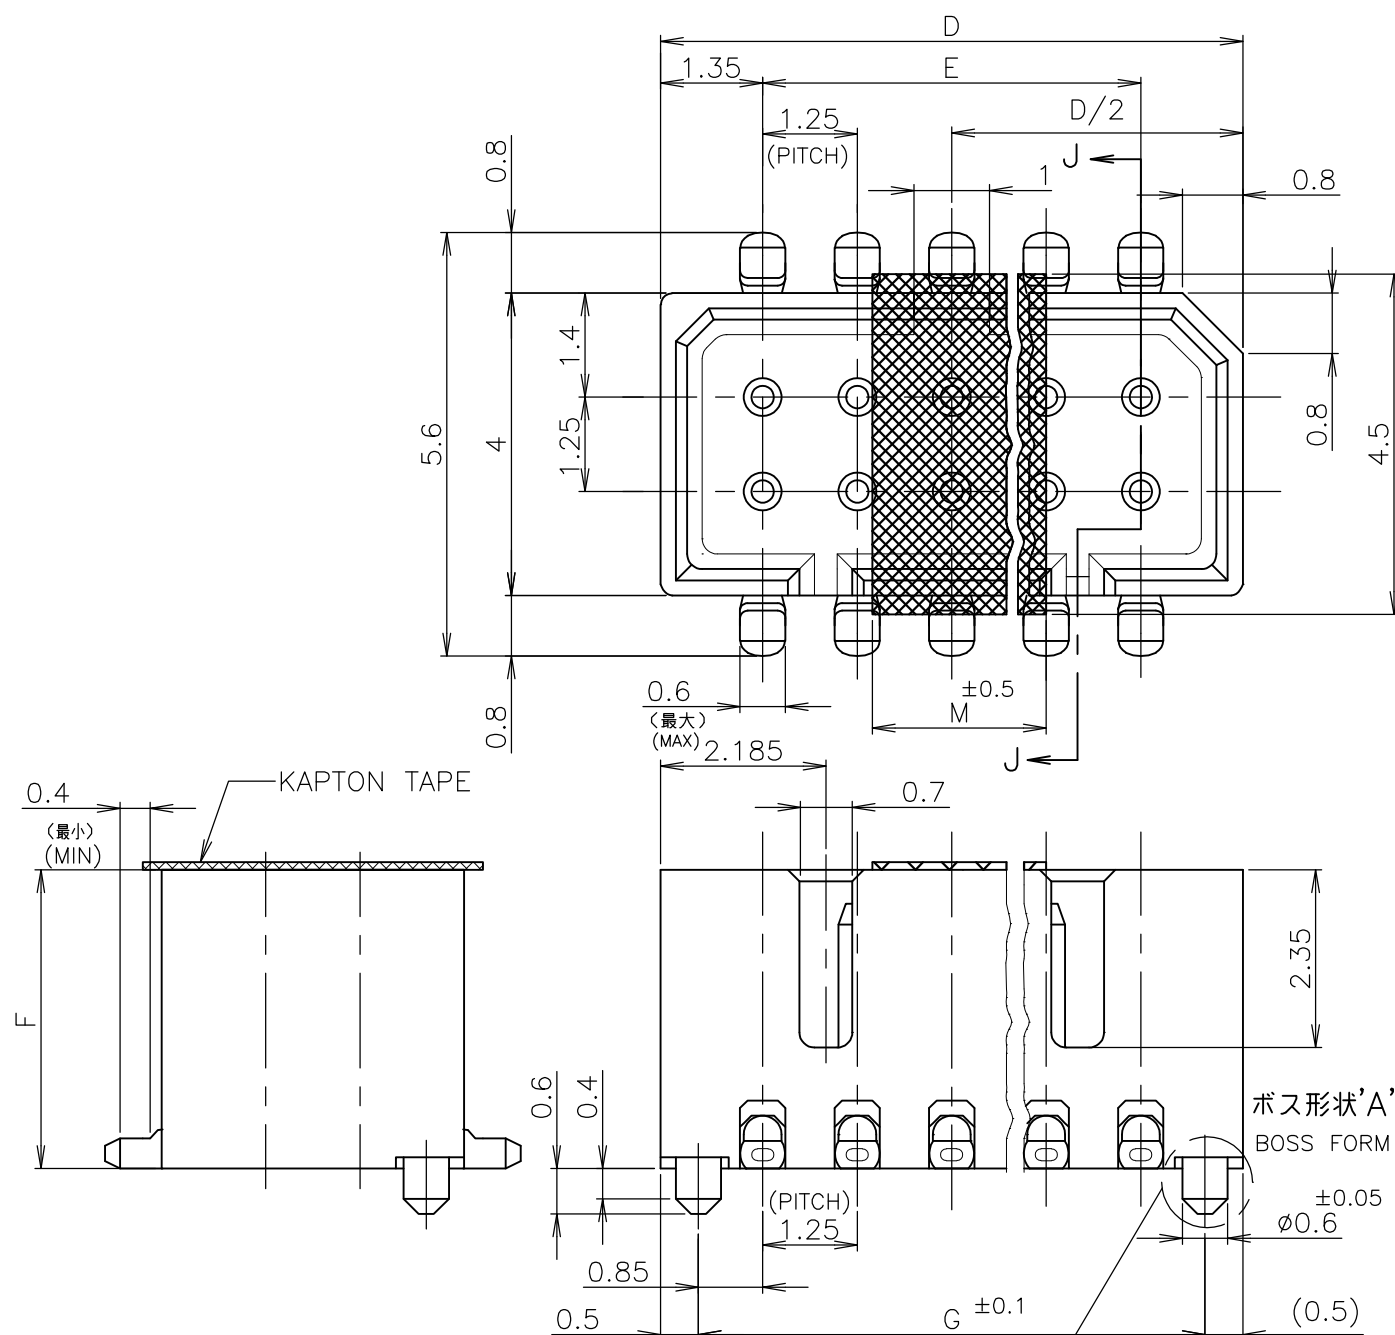

HEADER HOUSING

ヘッダーハウジング △4

(PPS UL94V-0)
COLOR : BLACK


POST
ポスト △4

(黄銅線)
(BRASS WIRE)
φ0.5

(3.35)

0.1
(最大)
(MAX)

SECT J-J

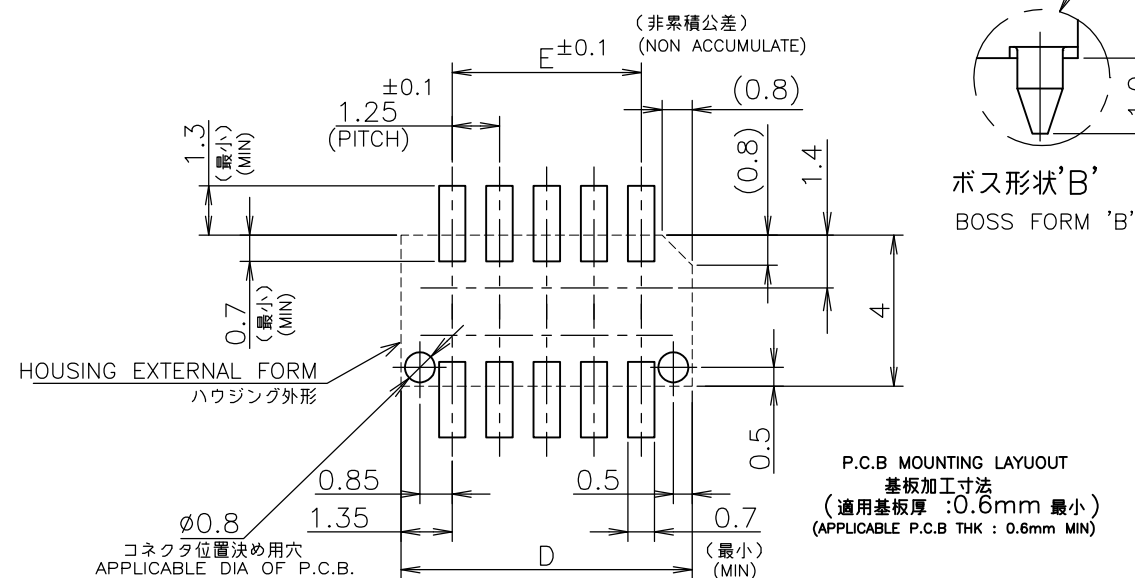


嵌合時寸法 : 巾 (mm) x 高さ (mm)
DIMENSIONS AFTER MATING : WIDTH (mm) x HEIGHT (mm)

嵌合相手側 MATING COUNTER コネクタ CONN RECE HDR ASSY	POST HDR ASSY	SMT TYPE X-174821-X X-1981350-X ボス付 WITH BOSS		
		ハウジング 高さ F 寸法 HOUSING HEIGHT F DIMENSIONS		
DIP TYPE	V TYPE X-174635-X X-176870-X	5.6<巾W>x 5.0<高H>	5.6<巾W>x 6.5<高H>	5.6<巾W>x 7.0<高H>
		5.6<巾W>x 5.8<高H>	5.6<巾W>x 7.3<高H>	5.6<巾W>x 7.8<高H>
SMT TYPE	V TYPE X-174904-X X-176768-X ボス付 WITH BOSS	5.6<巾W>x 5.0<高H>	5.6<巾W>x 6.5<高H>	5.6<巾W>x 7.0<高H>
		5.6<巾W>x 6.9<高H>	5.6<巾W>x 8.4<高H>	5.6<巾W>x 8.9<高H>

TABLE 1
表-1

SMT TYPEは、巾及び高さ寸法に
SMT TYPE INCLUDE DIMENSIONS
半田付タイン部寸法を含みます。
OF SOLDER DIP TIME.



THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

単位 : 耗

mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差

0 PLC ± 0.3
1 PLC ± 0.3
2 PLC ± 0.3
3 PLC ± 0.3
4 PLC ± 0.3
ANGLES ± 3°

MATERIAL
材料FINISH
仕上

DWN

CHK

APVD

PRODUCT SPEC

製品規格

APPLICATION SPEC

取付適用規格

WEIGHT

STE

TE Connectivity

NAME
名称

1.25FP CONNECTOR B-T-B, KAPTON TAPE,
ON TAPING EMBOSS, DOUBLE ROW POST HDR ASSY
SMT TYPE WITH BOSS

SIZE

CAGE CODE

DRAWING NO

番号

RESTRICTED TO

A300779

C-1981350

CUSTOMER DRAWING

SCALE
尺度 10:1

SHEET

2 OF 2

REV

C1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[4-1981350-0](#)