

200W, 5V - 100V Surface Mount Transient Voltage Suppressor

FEATURES

- Photo Glass passivated junction
- Low power loss, high efficiency
- Ideal for automated placement
- Excellent clamping capability
- Typical I_R less than 1 μ A above 10V
- 200 watts peak pulse power capability with a 10 / 1000 μ s waveform ($V_{WM} \geq 60V$, $P_{PPM} = 175W$)
- Compliant to RoHS directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21

KEY PARAMETERS

PARAMETER	VALUE	UNIT
V_{WM}	5 - 100	V
V_{BR} (uni-directional)	6.8 - 117	V
P_{PPM}	200	W
$T_{J\ MAX}$	175	°C
Package	SOD-123W	
Configuration	Single	

APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- Lighting application
- On-board DC/DC converter



MECHANICAL DATA

- Case: SOD-123W
- Molding compound meets UL 94V-0 flammability rating
- Part no. with suffix "H" means AEC-Q101 qualified
- Packing code with suffix "G" means green compound (halogen-free)
- Moisture sensitivity level: level 1, per J-STD-020
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Polarity: As marked
- Weight: 16 mg (approximately)



SOD-123W

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Non-repetitive peak impulse power dissipation with 10/1000 μ s waveform ⁽¹⁾	P_{PPM}	200	W
Steady state power dissipation at $T_L=25^\circ\text{C}$ ⁽²⁾	P_{tot}	1	W
Forward Voltage @ $I_F=12A$ for Uni-directional only ⁽³⁾	V_F	3.5	V
Junction temperature	T_J	-55 to +175	°C
Storage temperature	T_{STG}	-55 to +175	°C

Notes:

1. Non-repetitive Current Pulse Per Fig. 3 and derated above $T_A=25^\circ\text{C}$ Per Fig. 2
2. Units mounted on recommended PCB (5mm x 5mm Cu pad test board)
3. Pulse test with $PW=0.3$ ms

THERMAL PERFORMANCE

PARAMETER	SYMBOL	LIMIT	UNIT
Junction-to-lead thermal resistance per diode	$R_{\theta JL}$	33	°C/W
Junction-to-ambient thermal resistance per diode	$R_{\theta JA}$	100	°C/W
Junction-to-case thermal resistance per diode	$R_{\theta JC}$	34	°C/W

Thermal Performance Note: Units mounted on recommended PCB (5mm x 5mm Cu pad test board)

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Part number	Marking code	Breakdown voltage $V_{BR}@I_T$ (V) (Note 1)		Test current I_T (mA)	Working stand-off voltage V_{WM} (V)	Maximum reverse leakage current $I_R@V_{WM}$ (μA) (Note 1)	Maximum peak impulse current I_{PPM} (A) $t_p = 10/1000 \mu\text{s}$	Maximum clamping voltage $V_C@I_{PPM}$ (V) $t_p = 10/1000 \mu\text{s}$
		Min.	Max.					
SMF5.0A	2W5P0	6.4	7.0	10	5	800	21.7	9.2
SMF6.0A	2W6P0	6.67	7.37	10	6	800	19.4	10.3
SMF6.5A	2W6P5	7.22	7.98	10	6.5	500	17.9	11.2
SMF7.0A	2W7P0	7.78	8.6	10	7.0	200	16.7	12.0
SMF7.5A	2W7P5	8.33	9.21	1	7.5	100	15.5	12.9
SMF8.0A	2W8P0	8.89	9.83	1	8.0	50	14.7	13.6
SMF8.5A	2W8P5	9.44	10.5	1	8.5	10	13.9	14.4
SMF9.0A	2W9P0	10.0	11.1	1	9.0	5	13.0	15.4
SMF10A	2W010	11.1	12.3	1	10	5	11.8	17.0
SMF11A	2W011	12.2	13.5	1	11	1	11.0	18.2
SMF12A	2W012	13.3	14.7	1	12	1	10.1	19.9
SMF13A	2W013	14.4	15.9	1	13	1	9.3	21.5
SMF14A	2W014	15.6	17.2	1	14	1	8.6	23.2
SMF15A	2W015	16.7	18.5	1	15	1	8.2	24.4
SMF16A	2W016	17.8	19.7	1	16	1	7.7	26.0
SMF17A	2W017	18.9	20.9	1	17	1	7.2	27.6
SMF18A	2W018	20.0	22.1	1	18	1	6.8	29.2
SMF20A	2W020	22.2	24.5	1	20	1	6.2	32.4
SMF22A	2W022	24.4	26.9	1	22	1	5.6	35.5
SMF24A	2W024	26.7	29.5	1	24	1	5.1	38.9
SMF26A	2W026	28.9	31.9	1	26	1	4.8	42.1
SMF28A	2W028	31.1	34.4	1	28	1	4.4	45.4
SMF30A	2W030	33.3	36.8	1	30	1	4.1	48.4
SMF33A	2W033	36.7	40.6	1	33	1	3.8	53.3
SMF36A	2W036	40.0	44.2	1	36	1	3.4	58.1
SMF40A	2W040	44.4	49.1	1	40	1	3.1	64.5
SMF43A	2W043	47.8	52.8	1	43	1	2.9	69.4
SMF45A	2W045	50.0	55.3	1	45	1	2.8	72.7
SMF48A	2W048	53.3	58.9	1	48	1	2.6	77.4
SMF51A	2W051	56.7	62.7	1	51	1	2.4	82.4
SMF54A	2W054	60.0	66.3	1	54	1	2.3	87.1
SMF58A	2W058	64.4	71.2	1	58	1	2.1	95
SMF60A	2W060	66.7	73.7	1	60	1	1.8	96.8
SMF64A	2W064	71.1	78.6	1	64	1	1.7	103
SMF70A	2W070	77.8	86	1	70	1	1.55	113
SMF75A	2W075	83.3	92.1	1	75	1	1.45	121
SMF78A	2W078	86.7	95.8	1	78	1	1.4	126
SMF85A	2W085	94.4	104	1	85	1	1.3	137
SMF90A	2W090	100	111	1	90	1	1.05	146
SMF100A	2W100	111	123	1	100	1	1.08	162

Note:

1. Pulse test with $PW=30 \text{ ms}$

ORDERING INFORMATION

PART NO.	PART NO. SUFFIX(*)	PACKING CODE	PACKING CODE SUFFIX	PACKAGE	PACKING
SMFxxxA (Note 1,2)	H	RV	G	SOD-123W	3,000 / 7" Reel
		RQ		SOD-123W	10,000 / 13" Reel

Notes :

- "xxx" defines voltage from 5V (SMF5.0A) to 100V (SMF100A)
- Whole series with green compound (halogen-free)

*: Optional available

EXAMPLE

EXAMPLE P/N	PART NO.	PART NO. SUFFIX	PACKING CODE	PACKING CODE SUFFIX	DESCRIPTION
SMF5.0AHRVG	SMF5.0A	H	RV	G	AEC-Q101 qualified Green compound

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Pulse Power or Current vs. Initial Junction Temperature

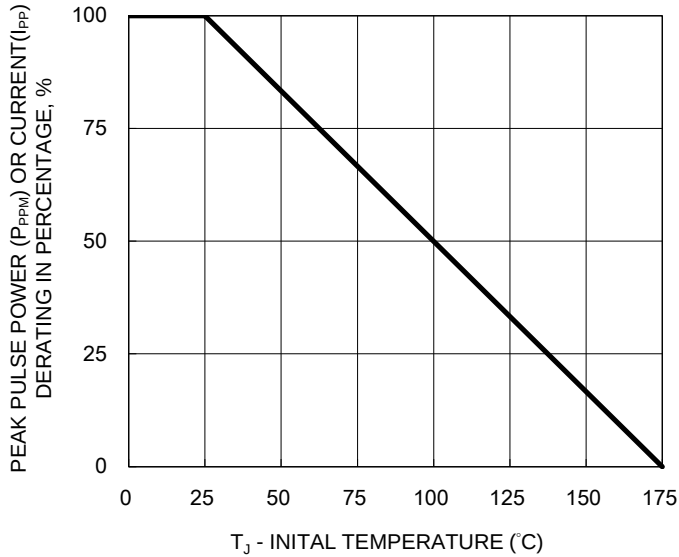


Fig.2 Steady State Power Derating

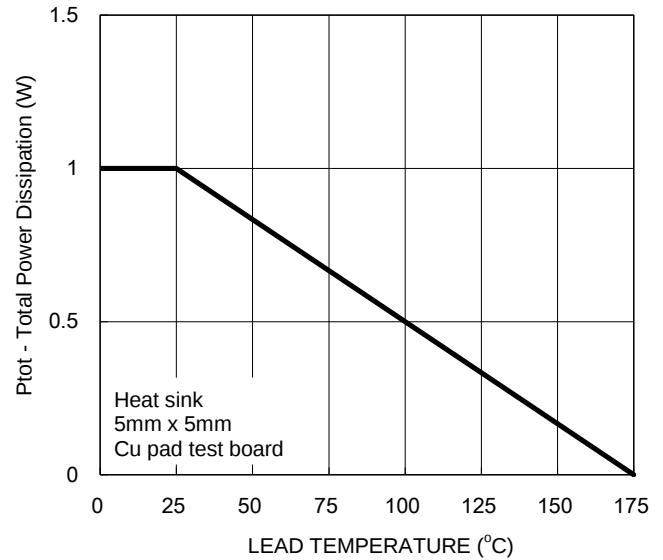


Fig.3 Clamping Power Pulse Waveform




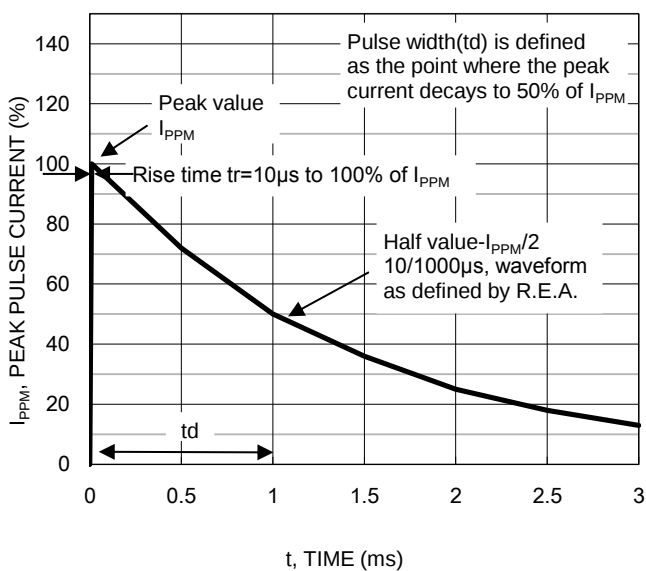


Fig.4 Typical Junction Capacitance

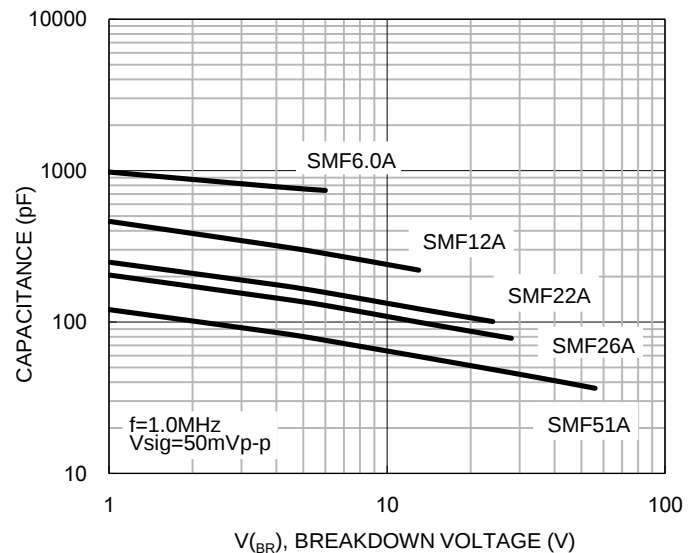


PACKAGE OUTLINE DIMENSIONS

SOD-123W

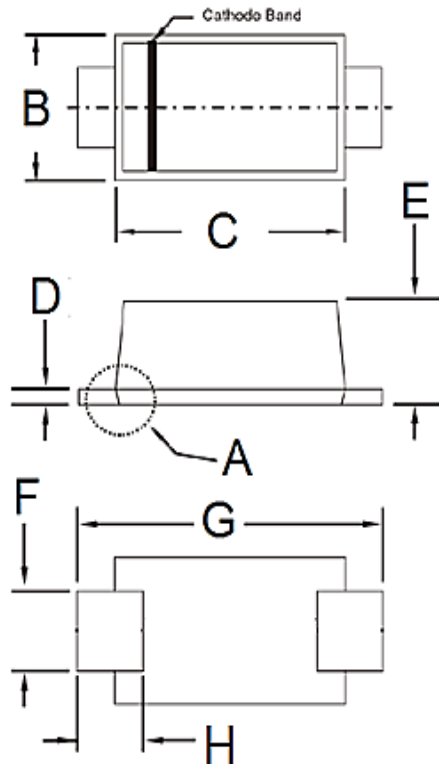

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
B	1.70	1.90	0.067	0.075
C	2.60	2.90	0.102	0.114
D	0.10	0.22	0.004	0.009
E	0.90	1.02	0.035	0.040
F	0.90	1.05	0.035	0.041
G	3.60	3.80	0.142	0.150
H	0.50	0.85	0.020	0.033
I	0.00	0.10	0.000	0.004

SUGGESTED PAD LAYOUT

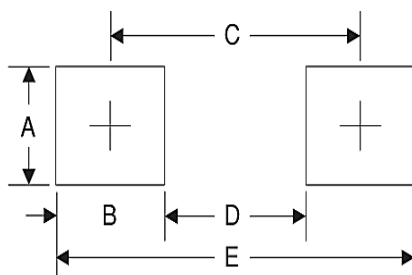

Symbol	Unit (mm)	Unit (inch)
A	1.4	0.055
B	1.2	0.047
C	3.1	0.122
D	1.9	0.075
E	4.3	0.169

MARKING DIAGRAM



P/N =Marking Code
YW =Date Code
F =Factory Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taiwan Semiconductor:

[SMF12AHRQG](#) [SMF33A RVG](#) [SMF85A RQG](#) [SMF58A RQG](#) [SMF11AHRVG](#) [SMF28A RVG](#) [SMF45A RVG](#)
[SMF8.5A RVG](#) [SMF43AHRVG](#) [SMF60A RVG](#) [SMF33A RQG](#) [SMF8.5AHRVG](#) [SMF54AHRQG](#) [SMF45AHRQG](#)
[SMF30AHRQG](#) [SMF12A RVG](#) [SMF8.0A RVG](#) [SMF70A RVG](#) [SMF7.5A RVG](#) [SMF18A RQG](#) [SMF90AHRVG](#)
[SMF24AHRQG](#) [SMF26A RVG](#) [SMF7.5AHRVG](#) [SMF48A RQG](#) [SMF15AHRVG](#) [SMF20A RVG](#) [SMF13AHRQG](#)
[SMF33AHRQG](#) [SMF8.0AHRVG](#) [SMF75A RQG](#) [SMF8.5AHRQG](#) [SMF64AHRVG](#) [SMF43A RQG](#) [SMF8.0AHRQG](#)
[SMF20AHRQG](#) [SMF60AHRVG](#) [SMF51AHRVG](#) [SMF9.0A RVG](#) [SMF75A RVG](#) [SMF43A RVG](#) [SMF6.5AHRVG](#)
[SMF15A RVG](#) [SMF11AHRQG](#) [SMF6.5A RVG](#) [SMF100A RQG](#) [SMF51A RVG](#) [SMF17AHRVG](#) [SMF13AHRVG](#)
[SMF54AHRVG](#) [SMF17A RVG](#) [SMF17AHRQG](#) [SMF45AHRVG](#) [SMF7.5AHRQG](#) [SMF64A RQG](#) [SMF22A RVG](#)
[SMF100A RVG](#) [SMF15A RQG](#) [SMF6.0A RVG](#) [SMF14AHRQG](#) [SMF24A RVG](#) [SMF90AHRQG](#) [SMF18AHRVG](#)
[SMF40A RVG](#) [SMF78AHRVG](#) [SMF36AHRQG](#) [SMF78AHRQG](#) [SMF51A RQG](#) [SMF36A RVG](#) [SMF7.5A RQG](#)
[SMF40AHRVG](#) [SMF48A RVG](#) [SMF60AHRQG](#) [SMF54A RVG](#) [SMF26AHRVG](#) [SMF28A RQG](#) [SMF6.0A RQG](#)
[SMF28AHRVG](#) [SMF78A RQG](#) [SMF16AHRQG](#) [SMF5.0AHRQG](#) [SMF10AHRVG](#) [SMF100AHRQG](#) [SMF13A RQG](#)
[SMF54A RQG](#) [SMF14A RVG](#) [SMF6.0AHRVG](#) [SMF10A RQG](#) [SMF6.5AHRQG](#) [SMF8.5A RQG](#) [SMF28AHRQG](#)
[SMF43AHRQG](#) [SMF58A RVG](#) [SMF58AHRQG](#) [SMF5.0A RVG](#) [SMF14AHRVG](#) [SMF7.0AHRVG](#) [SMF6.0AHRQG](#)
[SMF100AHRVG](#) [SMF12AHRVG](#)