

500mW, 2V-56V Zener Diodes

FEATURES

- Wide zener voltage range selection: 2.0V to 56V
- Hermetically sealed glass
- Compliant to RoHS directive 2011/65/EU and in accordance to WEEE 2002/96/EC


APPLICATIONS

- Low voltage stabilizers or voltage references
- Adapters
- Lighting application
- On-board DC/DC converter

MECHANICAL DATA

- Case: DO-34
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Polarity: Indicated by cathode band
- Weight: 92 mg (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
V_Z	2.0 - 56	V
Test current I_{ZT}	5	mA
P_D	500	mW
T_J MAX	175	°C
Package	DO-34	
Configuration	Single die	



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Power dissipation	P_D	500	mW
Junction temperature range	T_J	-55 to +175	°C
Storage temperature	T_{STG}	-55 to +175	°C

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PART NUMBER		MARKING CODE	ZENER VOLTAGE			TEST CURRENT	REGULAR IMPEDANCE		TEST CURRENT	LEAKAGE CURRENT	
			V _Z @ I _{ZT}			I _{ZT}	Z _{ZT} @ I _{ZT}	Z _{ZK} @ I _{ZK}	I _{ZK}	I _R @ V _R	
			V			mA	Ω	Ω	mA	μA	V
			Min.	Nom.	Max.		Max.	Max.		Max.	
MTZJ2V0S	A	2V0A	1.88	1.99	2.10	5	100	1000	0.5	120	0.5
	B	2V0B	2.02	2.11	2.20						
MTZJ2V2S	A	2V2A	2.12	2.21	2.30	5	100	1000	0.5	120	0.7
	B	2V2B	2.22	2.32	2.41						
MTZJ2V4S	A	2V4A	2.33	2.43	2.52	5	100	1000	0.5	120	1.0
	B	2V4B	2.43	2.53	2.63						
MTZJ2V7S	A	2V7A	2.54	2.65	2.75	5	110	1000	0.5	100	1.0
	B	2V7B	2.69	2.80	2.91						
MTZJ3V0S	A	3V0A	2.85	2.96	3.07	5	120	1000	0.5	50	1.0
	B	3V0B	3.01	3.12	3.22						
MTZJ3V3S	A	3V3A	3.16	3.27	3.38	5	120	1000	0.5	20	1.0
	B	3V3B	3.32	3.43	3.53						
MTZJ3V6S	A	3V6A	3.45	3.58	3.695	5	100	1000	1.0	10	1.0
	B	3V6B	3.60	3.72	3.845						
MTZJ3V9S	A	3V9A	3.74	3.88	4.01	5	100	1000	1.0	5	1.0
	B	3V9B	3.89	4.03	4.16						
MTZJ4V3S	A	4V3A	4.04	4.17	4.29	5	100	1000	1.0	5	1.0
	B	4V3B	4.17	4.30	4.43						
	C	4V3C	4.30	4.44	4.57						
MTZJ4V7S	A	4V7A	4.44	4.56	4.68	5	80	900	0.5	5	1.0
	B	4V7B	4.55	4.68	4.80						
	C	4V7C	4.68	4.81	4.93						
MTZJ5V1S	A	5V1A	4.81	4.94	5.07	5	80	1200	0.5	5	1.5
	B	5V1B	4.94	5.07	5.20						
	C	5V1C	5.09	5.23	5.37						
MTZJ5V6S	A	5V6A	5.28	5.42	5.55	5	60	900	0.5	5	2.5
	B	5V6B	5.45	5.59	5.73						
	C	5V6C	5.61	5.76	5.91						
MTZJ6V2S	A	6V2A	5.78	5.94	6.09	5	60	500	0.5	5	3.0
	B	6V2B	5.96	6.12	6.27						
	C	6V2C	6.12	6.28	6.44						
MTZJ6V8S	A	6V8A	6.29	6.46	6.63	5	20	150	0.5	2	3.5
	B	6V8B	6.49	6.66	6.83						
	C	6V8C	6.66	6.84	7.01						
MTZJ7V5S	A	7V5A	6.85	7.04	7.22	5	20	120	0.5	0.5	4.0
	B	7V5B	7.07	7.26	7.45						
	C	7V5C	7.29	7.48	7.67						
MTZJ8V2S	A	8V2A	7.53	7.73	7.92	5	20	120	0.5	0.5	5.0
	B	8V2B	7.78	7.99	8.19						
	C	8V2C	8.03	8.24	8.45						
MTZJ9V1S	A	9V1A	8.29	8.51	8.73	5	25	120	0.5	0.5	6.0
	B	9V1B	8.57	8.79	9.01						
	C	9V1C	8.83	9.07	9.30						
MTZJ10S	A	10A	9.12	9.36	9.59	5	30	120	0.5	0.2	7
	B	10B	9.41	9.66	9.90						
	C	10C	9.70	9.95	10.20						
	D	10D	9.97	10.21	10.44						
MTZJ11S	A	11A	10.18	10.45	10.71	5	30	120	0.5	0.2	8
	B	11B	10.50	10.78	11.05						
	C	11C	10.82	11.10	11.38						
MTZJ12S	A	12A	11.13	11.42	11.71	5	30	110	0.5	0.2	9
	B	12B	11.44	11.74	12.03						
	C	12C	11.74	12.05	12.35						
MTZJ13S	A	13A	12.11	12.43	12.75	5	35	110	0.5	0.2	10
	B	13B	12.55	12.88	13.21						
	C	13C	12.99	13.33	13.66						
MTZJ15S	A	15A	13.44	13.79	14.13	5	40	110	0.5	0.2	11
	B	15B	13.89	14.26	14.62						
	C	15C	14.35	14.72	15.09						
MTZJ16S	A	16A	14.80	15.19	15.57	5	40	150	0.5	0.2	12
	B	16B	15.25	15.65	16.04						
	C	16C	15.69	16.10	16.51						

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PART NUMBER		MARKING CODE	ZENER VOLTAGE			TEST CURRENT	REGULAR IMPEDANCE		TEST CURRENT	LEAKAGE CURRENT	
			$V_Z @ I_{ZT}$			I_{ZT}	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$	I_{ZK}	$I_R @ V_R$	
			V			mA	Ω	Ω	mA	μA	V
			Min.	Nom.	Max.		Max.	Max.		Max.	
MTZJ18S	A	18A	16.22	16.64	17.06	5	45	150	0.5	0.2	13
	B	18B	16.82	17.26	17.70						
	C	18C	17.42	17.88	18.33						
MTZJ20S	A	20A	18.02	18.49	18.96	5	55	200	0.5	0.2	15
	B	20B	18.63	19.11	19.59						
	C	20C	19.23	19.73	20.22						
MTZJ22S	A	22A	20.15	20.68	21.2	5	30	200	0.5	0.2	17
	B	22B	20.64	21.18	21.71						
	C	22C	21.08	21.63	22.17						
MTZJ24S	A	24A	21.52	22.08	22.63	5	35	200	0.5	0.2	19
	B	24B	22.05	22.62	23.18						
	C	24C	22.61	23.19	23.77						
MTZJ27S	A	27A	23.12	23.72	24.31	5	45	250	0.5	0.2	21
	B	27B	23.63	24.24	24.85						
	C	27C	24.26	24.89	25.52						
MTZJ30S	A	30A	24.97	25.62	26.26	5	55	250	0.5	0.2	23
	B	30B	25.63	26.29	26.95						
	C	30C	26.29	26.97	27.64						
MTZJ33S	A	33A	26.99	27.69	28.39	5	65	250	0.5	0.2	25
	B	33B	27.70	28.42	29.13						
	C	33C	28.36	29.09	29.82						
MTZJ36S	A	36A	29.02	29.77	30.51	5	75	250	0.5	0.2	27
	B	36B	29.68	30.45	31.22						
	C	36C	30.32	31.10	31.88						
MTZJ39S	A	39A	30.90	31.70	32.50	5	85	250	0.5	0.2	30
	B	39B	31.49	32.30	33.11						
	C	39C	32.14	32.97	33.79						
MTZJ43S	A	43A	32.79	33.64	34.49	5	90	250	0.5	0.2	33
	B	43B	33.40	34.27	35.13						
	C	43C	34.01	34.89	35.77						
MTZJ47S	A	47A	34.68	35.58	36.47	5	90	250	0.5	0.2	36
	B	47B	35.36	36.28	37.19						
	C	47C	36.00	36.93	37.85						
MTZJ51S	A	51A	36.63	37.58	38.52	5	110	250	0.5	0.2	39
	B	51B	37.36	38.33	39.29						
	C	51C	38.14	39.13	40.11						
MTZJ56S	A	56A	38.94	39.87	40.80	5	110	250	0.5	0.2	43
	B	56B	40.00	42.50	45.00						
	C	56C	44.00	46.50	49.00						

Notes:

- The zener voltage subdivision (V_Z) is measured 30ms after diode is powered up
- The operating resistance (Z_{ZT} or Z_{ZK}) is measured by superimposing a minute alternation current in the regulated current (I_Z)
- When ordering, please specify tolerance A, B, C, D, E, F, G

ORDERING INFORMATION

ORDERING CODE (Note 1, 2)	PACKAGE	PACKING
MTZJxxxSx R0	DO-34	10K / 14" Reel
MTZJxxxSx R0G	DO-34	10K / 14" Reel
MTZJxxxSx A0	DO-34	5K / Box (Ammo)
MTZJxxxSx A0G	DO-34	5K / Box (Ammo)

Note:

1. "xxx" defines voltage from 2.0V (MTZJ2V0SA) to 56V (MTZJ56S)
2. "G" means green compound (Halogen free)

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 $V_Z - I_Z$ Characteristics

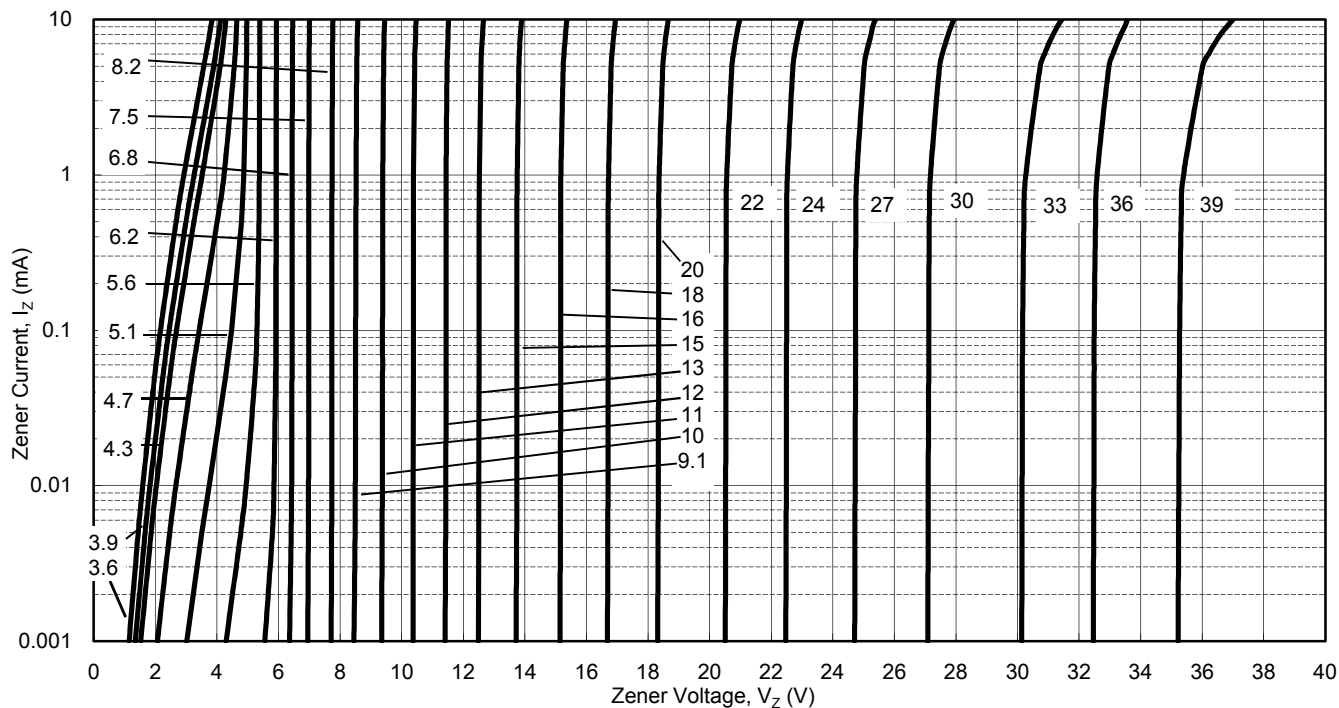


Fig. 2 $P_D - T_A$ Characteristics



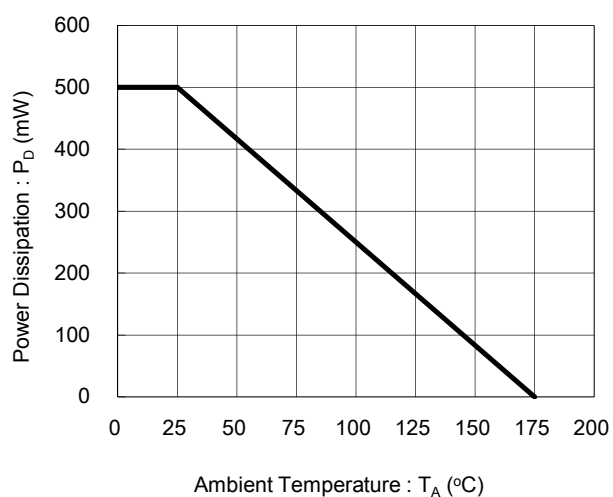


Fig. 3 $r_z - V_Z$ Characteristics

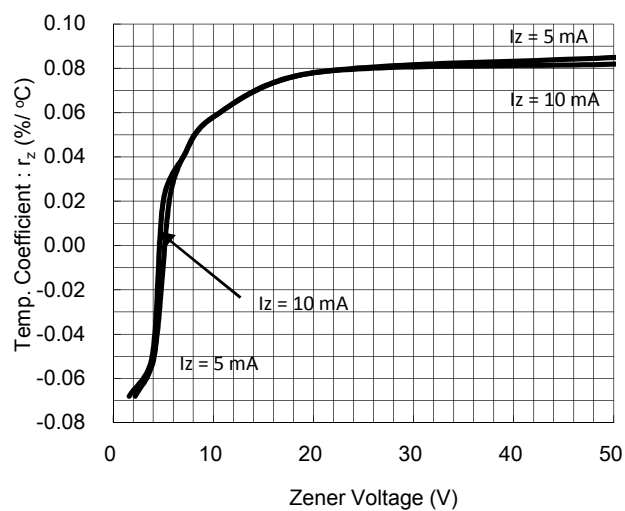

PACKAGE OUTLINE DIMENSION

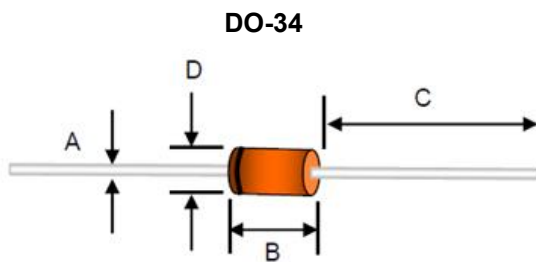

DIM	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	0.30	0.55	0.012	0.022
B	2.16	3.04	0.085	0.120
C	25.40	38.10	1.000	1.500
D	1.27	2.00	0.050	0.079

MARKING DIAGRAM



xxx = Marking code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taiwan Semiconductor:

[MTZJ15SA A0G](#) [MTZJ27SD A0G](#) [MTZJ2V0SA A0G](#) [MTZJ2V2SA A0G](#) [MTZJ2V2SB A0G](#) [MTZJ39SD A0G](#)
[MTZJ5V1SA A0G](#) [MTZJ4V3SC A0G](#) [MTZJ4V7SA A0G](#) [MTZJ4V7SB A0G](#) [MTZJ4V7SC A0G](#) [MTZJ51S A0G](#)
[MTZJ56S A0G](#) [MTZJ12SA A0G](#) [MTZJ12SB A0G](#) [MTZJ12SC A0G](#) [MTZJ13SA A0G](#) [MTZJ13SB A0G](#) [MTZJ13SC](#)
[A0G](#) [MTZJ10SB A0G](#) [MTZJ10SC A0G](#) [MTZJ10SD A0G](#) [MTZJ11SA A0G](#) [MTZJ11SB A0G](#) [MTZJ11SC A0G](#)
[MTZJ6V8SC A0G](#) [MTZJ7V5SB A0G](#) [MTZJ8V2SB A0G](#) [MTZJ9V1SB A0G](#) [MTZJ9V1SC A0G](#) [MTZJ10SA A0G](#)
[MTZJ39SC A0G](#) [MTZJ5V6SA A0G](#) [MTZJ5V6SB A0G](#) [MTZJ5V6SC A0G](#) [MTZJ6V2SA A0G](#) [MTZJ6V2SB A0G](#)
[MTZJ36SA A0G](#) [MTZJ36SB A0G](#) [MTZJ36SC A0G](#) [MTZJ36SD A0G](#) [MTZJ39SA A0G](#) [MTZJ39SB A0G](#) [MTZJ30SC](#)
[A0G](#) [MTZJ30SD A0G](#) [MTZJ33SA A0G](#) [MTZJ33SB A0G](#) [MTZJ33SC A0G](#) [MTZJ33SD A0G](#) [MTZJ27SB A0G](#)
[MTZJ2V4SA A0G](#) [MTZJ2V4SB A0G](#) [MTZJ2V7SB A0G](#) [MTZJ30SA A0G](#) [MTZJ30SB A0G](#) [MTZJ22SD A0G](#)
[MTZJ24SA A0G](#) [MTZJ24SB A0G](#) [MTZJ24SC A0G](#) [MTZJ24SD A0G](#) [MTZJ27SA A0G](#) [MTZJ20SB A0G](#) [MTZJ20SC](#)
[A0G](#) [MTZJ20SD A0G](#) [MTZJ22SA A0G](#) [MTZJ22SB A0G](#) [MTZJ22SC A0G](#) [MTZJ16SA A0G](#) [MTZJ16SB A0G](#)
[MTZJ18SA A0G](#) [MTZJ18SB A0G](#) [MTZJ18SC A0G](#) [MTZJ20SA A0G](#) [MTZJ4V3SA A0G](#) [MTZJ4V3SB A0G](#)
[MTZJ5V1SB A0G](#) [MTZJ5V1SC A0G](#) [MTZJ15SB A0G](#) [MTZJ15SC A0G](#) [MTZJ3V3SB A0G](#) [MTZJ3V6SA A0G](#)
[MTZJ3V9SA A0G](#) [MTZJ3V9SB A0G](#) [MTZJ43S A0G](#) [MTZJ47S A0G](#) [MTZJ39SE A0G](#) [MTZJ39SF A0G](#) [MTZJ39SG](#)
[A0G](#) [MTZJ3V0SA A0G](#) [MTZJ3V0SB A0G](#) [MTZJ3V3SA A0G](#)