



## Main

Range of Product	Telemecanique Cabling components
Accessory / separate part category	Cabling accessory
Accessory / Separate Part Type	Pre-wired connectors
Series name	General purpose

## Complementary

Electrical connection	Elbowed female connector M12, 3 pins
Cable connector fixing	Screw-on
Collar material	Metal
Status LED	2 PNP LEDs
Cable length	32.81 ft (10 m)
Cable outer diameter	0.18 in (4.6 mm)
Cable composition	3 x 0.25 mm <sup>2</sup>
Wire insulation material	PVC
[Ue] rated operational voltage	30 V AC 36 V DC
Line Rated Current	3 A
Contact resistance	5000 μOhm
Minimum insulating resistance	1 GΩ
Net Weight	0.84 lb(US) (0.38 kg)

## Environment

IP Degree of Protection	IP65 IP67
Product Certifications	cULus
Ambient air temperature for operation	-13...176 °F (-25...80 °C) static
Ambient Air Temperature for Storage	-13...176 °F (-25...80 °C)

## Ordering and shipping details

Category	22483 - MACHINE CABLES
Discount Schedule	DS3
GTIN	3389119073615
Nbr. of units in pkg.	1
Package weight(Lbs)	10.44 oz (296 g)
Returnability	No
Country of origin	PL

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	1.38 in (3.5 cm)
Package 1 width	7.09 in (18 cm)
Package 1 Length	8.66 in (22 cm)
Unit Type of Package 2	S02
Number of Units in Package 2	10
Package 2 Weight	7.53 lb(US) (3.415 kg)
Package 2 Height	5.91 in (15 cm)
Package 2 width	11.81 in (30 cm)
Package 2 Length	15.75 in (40 cm)


## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>

## Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

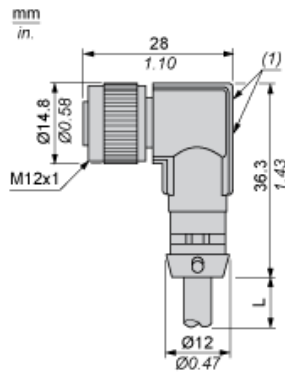


- L : Length of cable
- (1) 2 LEDs limited to 10...30 VDC max.

---

## Connections and Schemes

---

### Connector




BU : Blue  
BN : Brown  
BK : Black

---

## Connections and Schemes

---

### LED Connection



BN : Brown  
BK : Black  
BU : Blue  
GN : Green  
YW : Yellow  
(1) Signal