

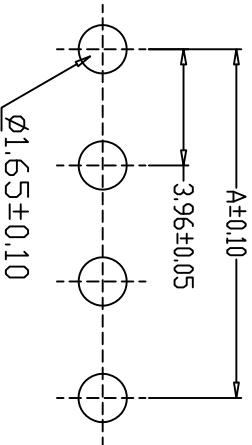
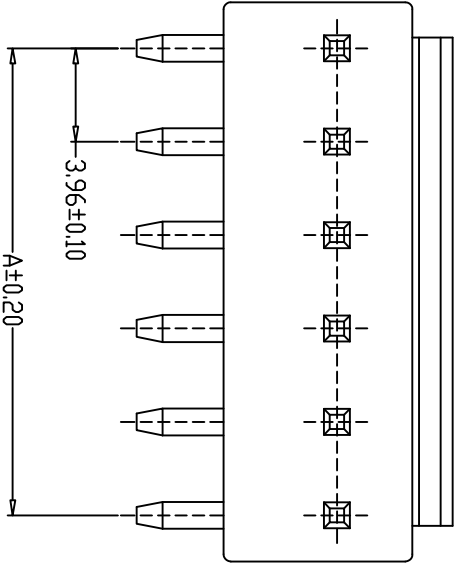


- SPECIFICATIONS
- 1、Current Rating: 7A AC, DC
 - 2、Voltage Rating: 250V AC, DC
 - 3、Temperature Range: -25℃~+85℃
 - 4、Contact Resistance: 20mΩ Max
 - 5、Insulation Resistance: 1000MΩ Min
 - 6、Withstanding Voltage: 1500V AC/minute
 - 7、Material: Wafer Nylon66, UL94V-0
 - PIN Brass Tin-plated

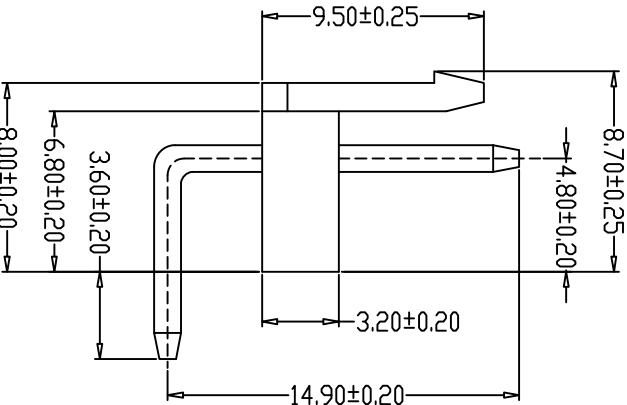

PCB LAYOUT

编 号	尺寸 (mm)	
	A	B
A3961-02AWG	3.96	7.92
A3961-03AWG	7.92	11.88
A3961-04AWG	11.88	15.84
A3961-05AWG	15.84	19.80
A3961-06AWG	19.80	23.76
A3961-07AWG	23.76	27.72
A3961-08AWG	27.72	31.68
A3961-09AWG	31.68	35.64
A3961-10AWG	35.64	39.60
A3961-11AWG	39.60	43.56
A3961-12AWG	43.56	47.52

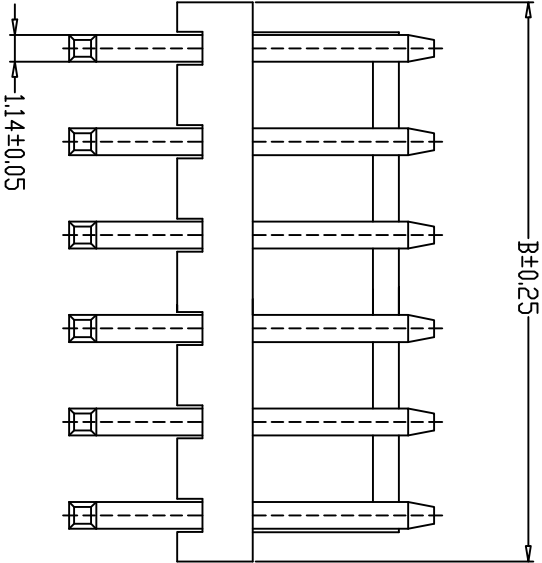

单位
UNIT

mm

比例
SCALE

批准:
APPROVED BY

审核:
CHECKED BY

制图:
DRAWN BY

版本: A0
Product name

页次: 1/1
Product No

日期: 2022.9.5
Client No

深圳市泰华电子有限公司
TaiHua Electronics Co., Ltd

VH高弯 WAFER DIP TYPE
TH-A3961-NAWG

F

E

D

C

B

A

F

E

D

C

B

A

1

2

3

4

5

6

7

8