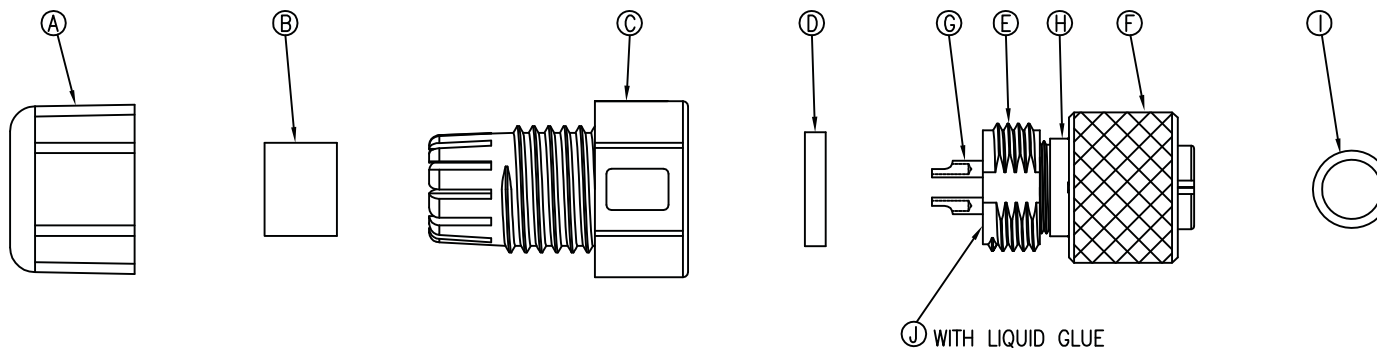


NOTES:

1 ELECTRICAL CHARACTERISTICS:

- 1-1 CONTACT RESISTANCE: 30 mOhm Max.
- 1-2 INSULATION RESISTANCE: 100 MOhm Min. at 500VDC.
- 1-3 BREAKDOWN VOLTAGE: 500 VAC PER MINUTE.

2. MECHANICAL CHARACTERISTICS:

- 2-1 TIGHTENING TORQUES: 1.0~1.2Nm(8.85~10.62lbf.in.).

3. ENVIRONMENTAL:

- 3-1 OPERATING TEMPERATURE: -40°C TO +105°C.
- 3-2 SEALING REQUIREMENTS: IP68.

J	LIQUID GLUE	1	N/A	BLACK
I	O-RING	1	VITON	RED
H	BODY	1	PA66+GF	BLACK
G	FEMALE PIN	*	COPPER ALLOY	6u" GOLD PLATING OVER NICKEL PLATING
F	SCREW NUT	1	BRASS	NICKEL PLATING
E	SCREW NUT	1	BRASS	BLACK
D	GASKET	1	SILICONE	BLACK
C	CLAMP RING	1	PC	BLACK
B	SEAL	1	EPDM	BLACK
A	SEALING NUT	1	PC	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES			CnC Tech, LLC	
DECIMALS:		ANGLES:	TITLE	
X	:±0.5	X	:±2°	M12 Extension, Connector IP68 - Female, Code A, 180°, for AWG24/22 *5C
X.X	:±0.3	X.X	:±1°	DWN Vicky
X.XX	:±0.2			CHKD Harlen
				APVD Quan
			PART NO.	510F-3032-W05
			SCALE	2:1
			UNIT:	mm
			SIZE:	A3
			SHEET:	1 OF 1
			REV:	A
CUSTOMER COPY				