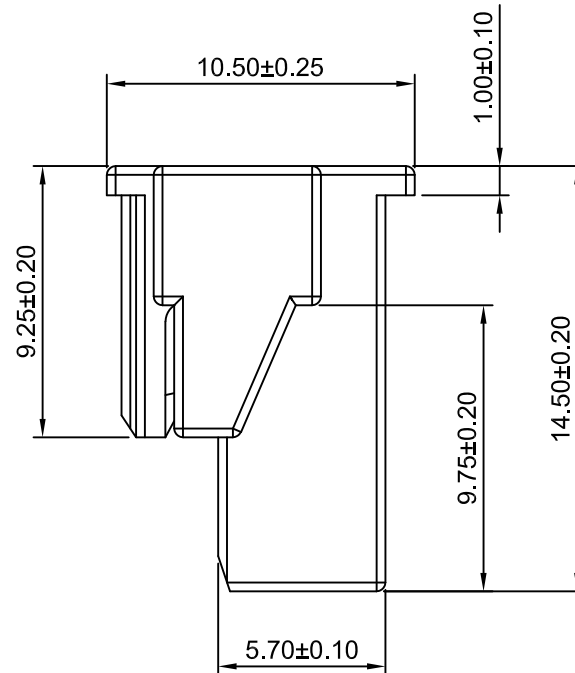
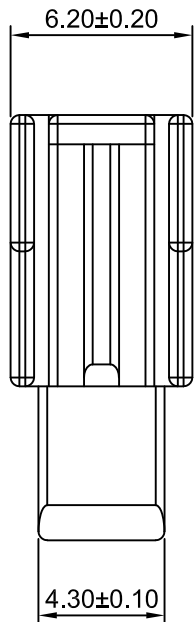
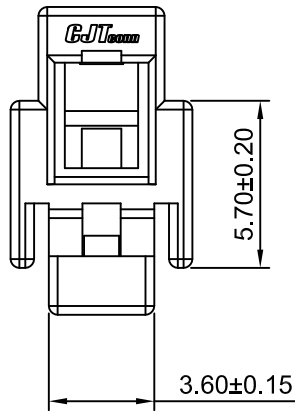


Ordering Information:

A3963H-1P - *** - ** - **
1 2 3 4

1.Part NO.

2.Material:

(Blank): Nylon 66 , UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition Glow Wire Capable.

3.Color:

(Blank): See Section 2 material

BK: Black RD: Red
BL: Blue OR: Orange
YL: Yellow GY: Gray
GN: Green PK: Pink

4.Packing:

(Blank): Bag

SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1500V AC/minute

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	2.5:1	1 of 1	3.96mm PITCH HOUSING
DRAWN	CHK'D	APPR'D	
Halsen Li	Dlankul Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A3963H-1P
A0	NEW RELEASE	2024.09.10	REV A0
REV	DESCRIPTION	DATE	