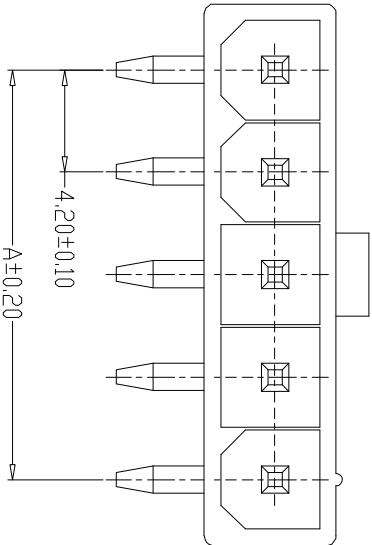
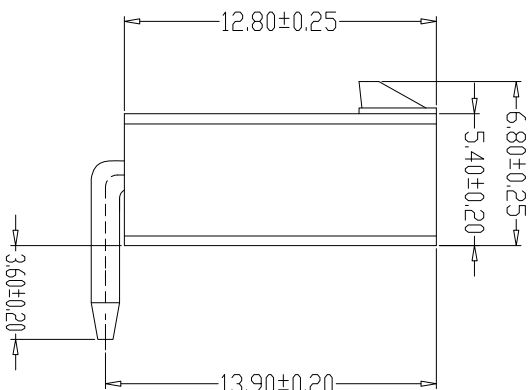
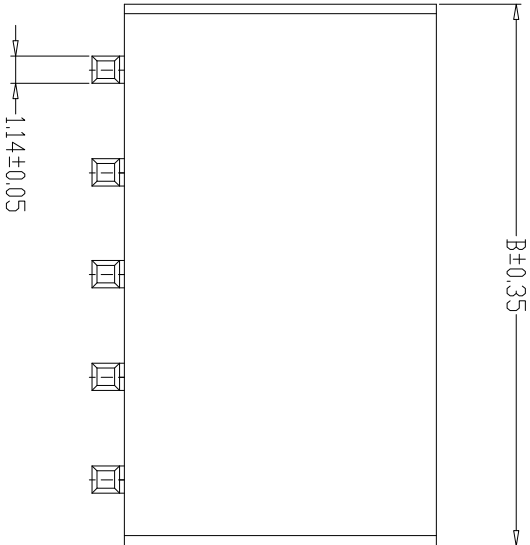


PCB LAYOUT

- SPECIFICATIONS
- Current Rating: 9A AC, DC
 - Voltage Rating: 600V AC, DC
 - Temperature Range: -25°C~+85°C B
 - Contact Resistance: 20mΩ Max
 - Insulation Resistance: 1000MΩ Min
 - Withstanding Voltage: 1500V AC/minute
 - Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

编 号	尺寸 (mm)	
	A	B
A4250-02AW	4.20	9.60
A4250-03AW	8.40	13.80
A4250-04AW	12.60	18.00
A4250-05AW	16.80	22.20

单位	mm	深圳市泰华电子有限公司 <i>TaiHua Electronics Co., Ltd</i>	
比例			
	X.±0.5	X.±	
SCALE			
核准:	APPROVED BY	版本: A0	产品名称 5569单排弯针
审核:	CHECKED BY	页次: 1/1	产品料号 WATER DIP TYPE
制图:	DRAWN BY	日期:	TH-A4520-NAW
	2022.12.05	封文辉	