


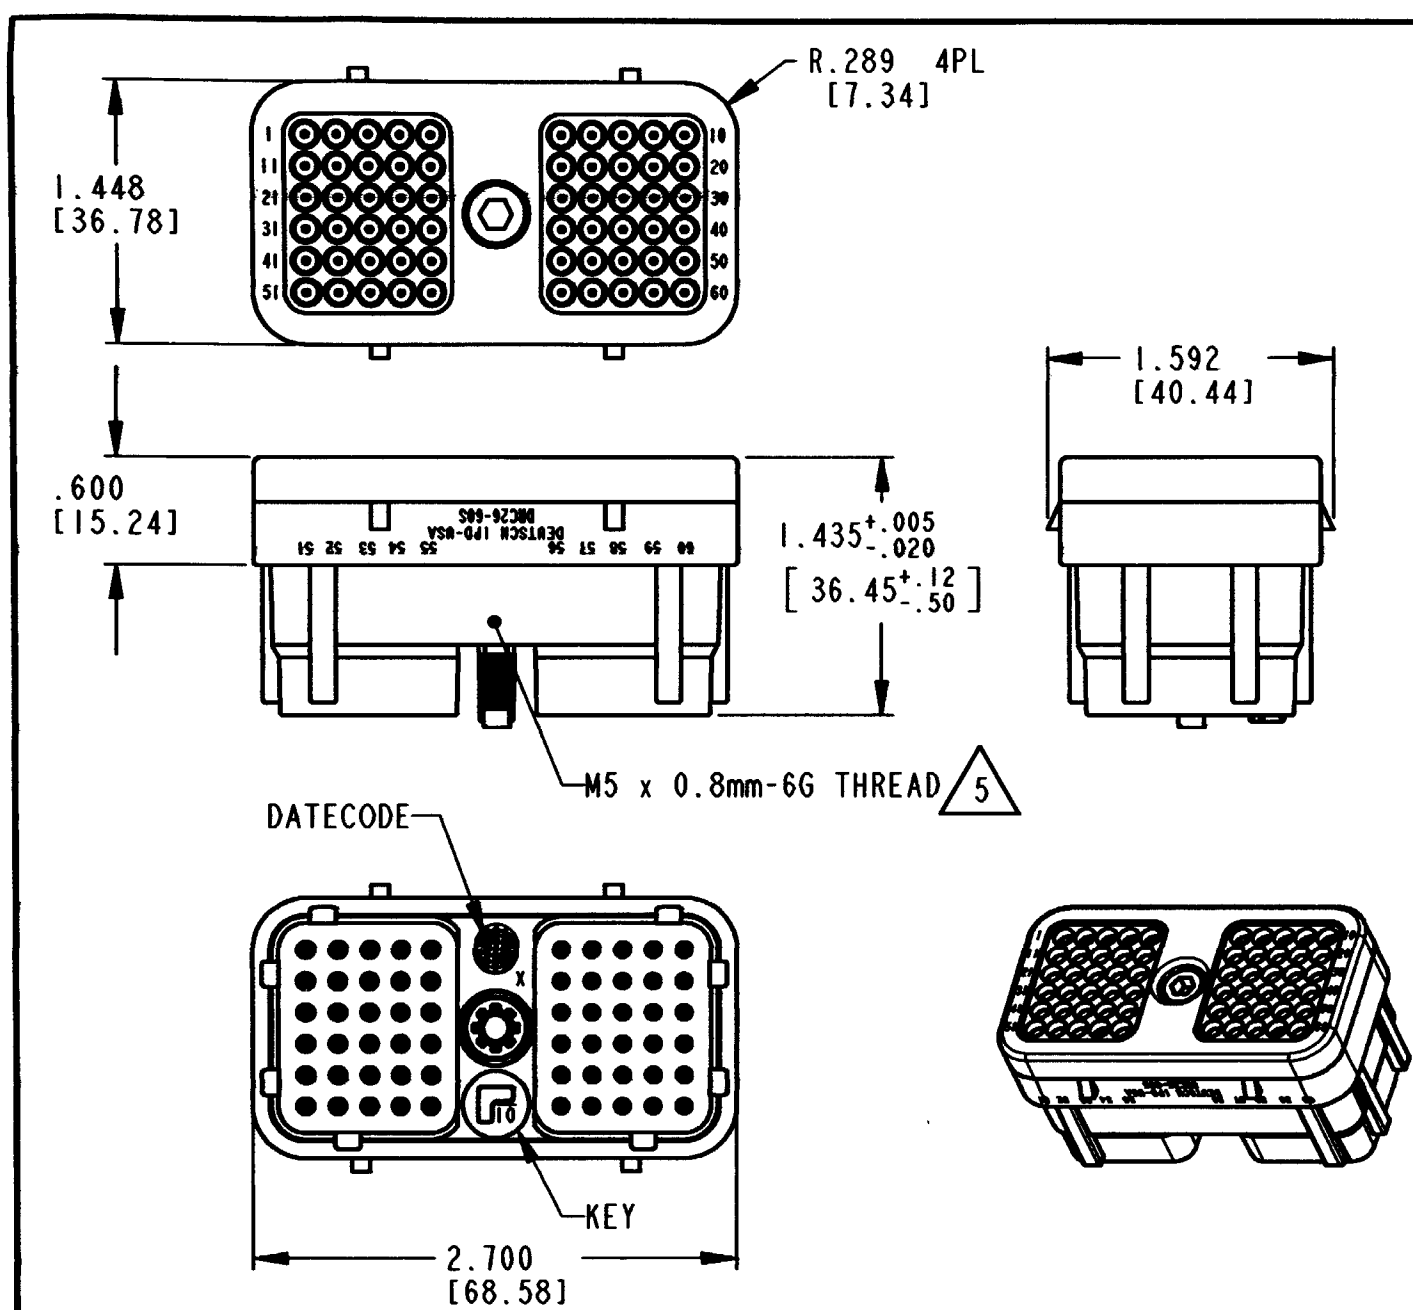


5. RECOMMENDED RETAINING BOLT TORQUE: 25-28 IN-LB [2.82-3.16Nm]
4. THIS CONNECTOR WILL ACCOMODATE THE FOLLOWING:

CONTACT SIZE	MIN. O.D.	MAX. O.D.	WIRE GAUGE RANGE
20	.040 [1.016]	.095 [2.413]	16 THRU 20 [1.00-0.50mm ²]

3. PLUG IS SUPPLIED WITH DUST CAP. (NOT SHOWN)
2. DIMENSION TOLERANCE: $\pm .025$ [.64]

NOTES: 1. DIMENSIONS ARE IN INCHES [mm].

REV A	DRC26-60S**	REVISIONS		
		SYM	DESCRIPTION	DATE APPROVED
		NC	NEW RELEASE PER E.O. P16250	10/1/99 R.D.R.
		A	REVISED PER E.O. P19912	6/20/08 RDR

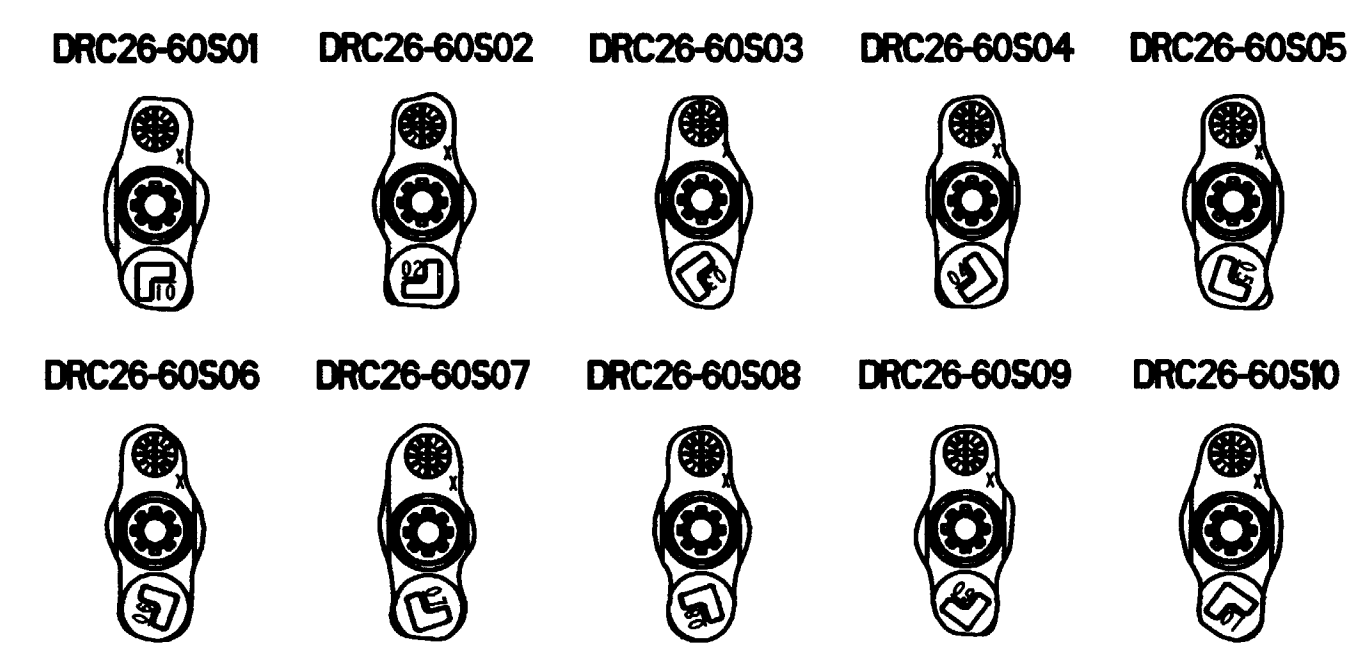

8. MATERIAL: HOUSING: PLASTIC (BLACK); BOLT: SS STEEL; CLIP: STEEL GROMMET: RUBBER
7. THIS PLUG MATES WITH 0944328L**-**** RECEPTACLE.
(** = KEY ARRANGEMENT; **** = ALL MODIFICATIONS)
6. FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS SEE ENVELOPE DRAWING 0425-015-0000.

SIGNATURE & DATE		PLUG 60 CONTACTS SIZE 20 DRC SERIES ENVELOPE	EP 075		NATL. CODE	
DR	D. MEYER 09/10/99		 3850 INDUSTRIAL AVE. HEMET, CA 92545		DEUTSCH INDUSTRIAL	
CHK	<i>[Signature]</i> 6/20/08					
PE	<i>[Signature]</i> 6/17/08					
			B	DRC26-60S**		
APPD	D. Meyer 6/17/08					
SCALE	NONE	WT	DWG SIZE	CODE 11139	SHEET 1	OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[DRC26-60S01](#)