
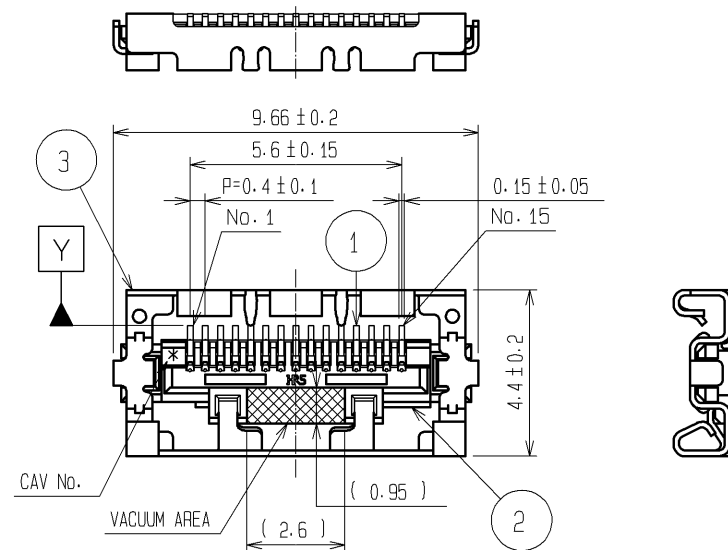
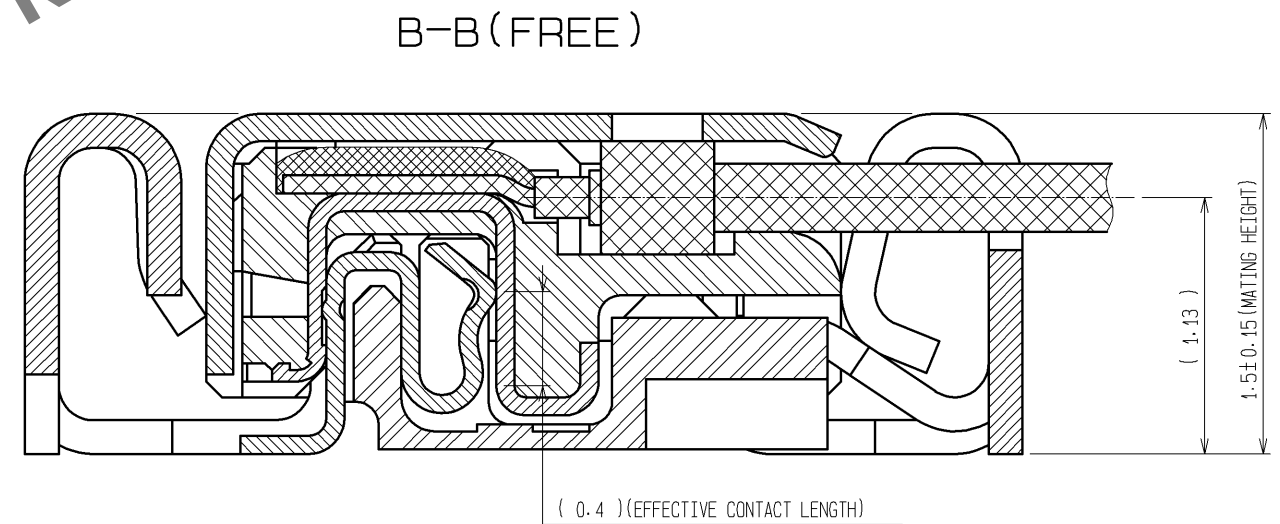
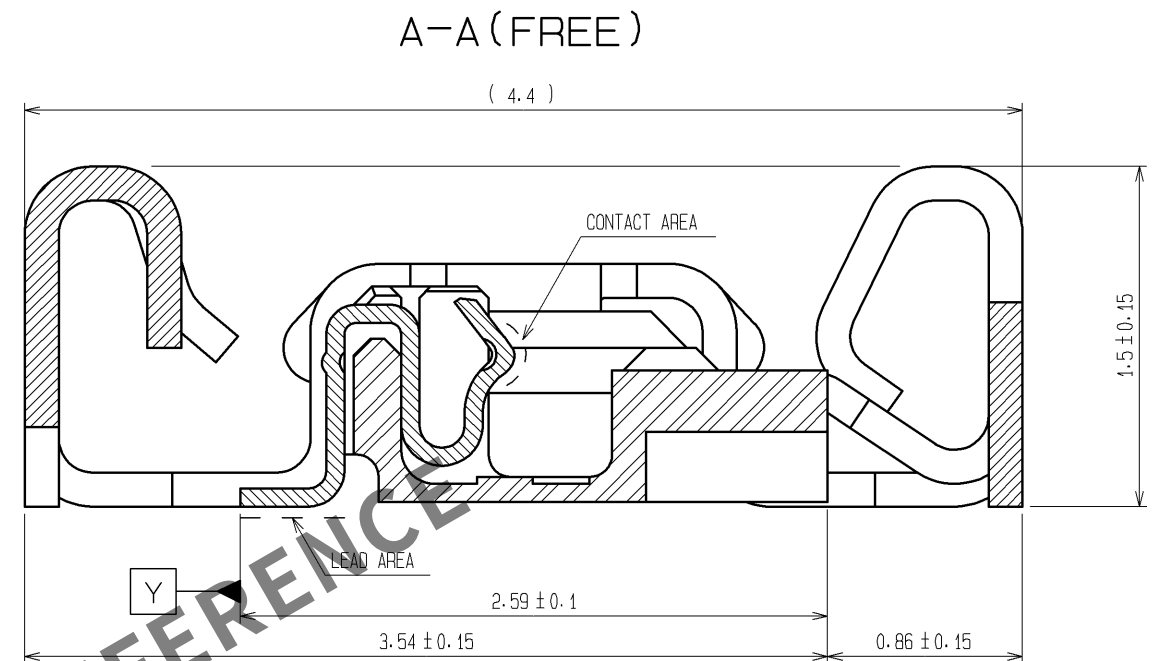


MATING FIGURE

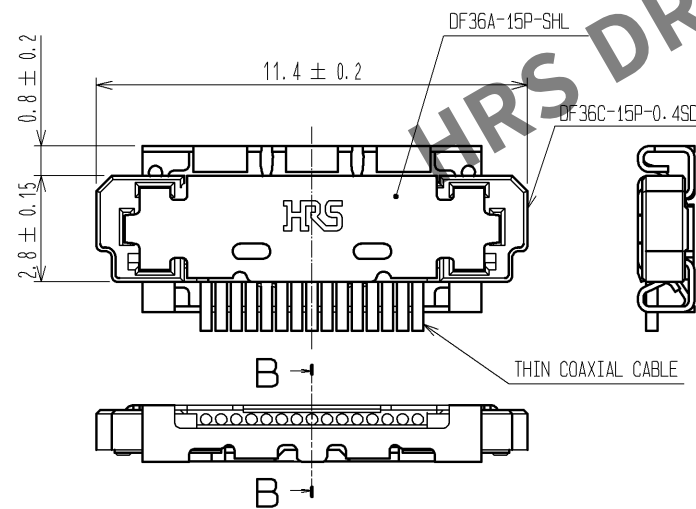

NOTES

1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
2. STIFFENER IS REQUIRED FOR MOUNTING ONTO FPC
IN ORDER TO AVOID STRESS BY
FPC SLACKING TO MOUNTED CONNECTOR.
3. UNMATING SHALL BE DONE WITH THE SPECIFIC EXTRACTION TOOL.
4. SOLDERING REWORK IS NOT POSSIBLE SINCE SOLDERING LEADS
ARE COVERED BY METAL SHIELDING.

			6	PS	BLACK			
			5	POLYESTER	CLEAR			
2	LCP	UL94V-0 , BLACK	4	PS	CLEAR			
1	PHOSPHOR BRONZE	CONTACT AREA : Gold PLATING 0.3µm min LEAD AREA : Gold PLATING 0.1µm min UNDER PLATING : Nickel PLATING 2µm min	3	PHOSPHOR BRONZE	WHOLE AREA : Tin PLATING 1µm min UNDER PLATING : Copper PLATING 0.2µm min			
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : KH. IKEDA		14. 11. 06	DRAWING NO.	EDC3-317911-03		
		CHECED : MH. TSUCHIDA		14. 11. 06	PART NO.	DF36A-15S-0. 4V(55)		
		DESIGNED : IO. DENPOUYA		14. 11. 06	CODE NO.	CL662-4509-5-55		
		DRAWN : YJ. HAGA		14. 10. 23				
								1/2

