

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block

1953017
<https://www.phoenixcontact.com/us/products/1953017>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Feed-through terminal block, nom. voltage: 800 V, nominal current: 32 A, number of connections: 8, connection method: Spade connection, 1 level, Rated cross section: 4 mm², cross section: 0.5 mm² - 6 mm², mounting type: NS 32, NS 35/7,5, NS 35/15, color: gray

Your advantages

- The slotted plugs enable one fully insulated or two bare 2.8 mm slip-on sleeves to be slid on in place of one 6.3 mm slip-on sleeve
- The housing panels only protrude slightly beyond the metal parts because it is assumed that fully-insulated slip-on sleeves are connected
- The front slip-on plug-in connection is the ideal wiring design for applications where space is limited and cable ducts need to be moved close to the terminal strip

Commercial data

Item number	1953017
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE05
Product key	BE511X
Catalog page	Page 535 (C-1-2019)
GTIN	4017918052508
Weight per piece (including packing)	11.24 g
Weight per piece (excluding packing)	10.99 g
Customs tariff number	85369010
Country of origin	PL

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

Technical data

Product properties

Product type	Feed-through terminal block
Number of connections	8
Number of rows	2
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	8 kV
Maximum power dissipation for nominal condition	1.02 W

Connection data

Number of connections per level	8
Nominal cross section	4 mm ²

1 level

Spade connection	6.3/2.8 x 0.8 mm
Conductor cross section rigid	0.5 mm ² ... 6 mm ²
Cross section AWG	20 ... 10 (converted acc. to IEC)
Conductor cross section flexible	0.5 mm ² ... 6 mm ²
Conductor cross section, flexible [AWG]	20 ... 10 (converted acc. to IEC)
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm ² ... 6 mm ²
Nominal current	32 A (dependent on the slip-on connection sleeve)
Maximum load current	32 A (dependent on the slip-on connection sleeve)
Nominal voltage	800 V (voltage data for slip-on connections in acc. with EN 61210 are also dependent on nominal size, material, insulation of the sleeve and conductor cross section.)
Nominal cross section	4 mm ²

Dimensions

Width	6.2 mm
End cover width	2.2 mm
Height	68 mm
Depth on NS 32	49 mm
Depth on NS 35/7,5	44 mm
Depth on NS 35/15	51.5 mm

Material specifications

Color	gray
Flammability rating according to UL 94	V2

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

Insulating material group	I
Insulating material	PA

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, no longer than 24 h, -60°C to +70°C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Mounting

Mounting type	NS 32
	NS 35/7,5
	NS 35/15

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block




1953017

<https://www.phoenixcontact.com/us/products/1953017>

Drawings

Circuit diagram

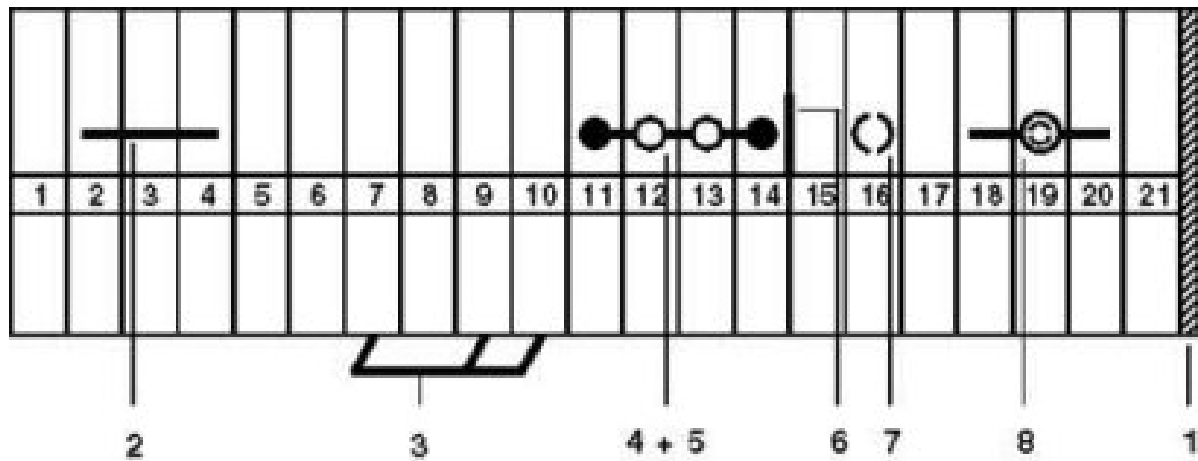

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

Circuit diagram



UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017
<https://www.phoenixcontact.com/us/products/1953017>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1953017>

DNV Approval ID: TAE00001CT				
---	--	--	--	--

 UL Recognized Approval ID: E60425				
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
Use group C				
	300 V	25 A	-	-

 EAC Approval ID: RU C-DE.BL08.B.00541				
--	--	--	--	--

 UL Recognized Approval ID: E60425				
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
Use group C				
	300 V	25 A	-	-

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017
<https://www.phoenixcontact.com/us/products/1953017>

Classifications

ECLASS

ECLASS-11.0	27141120
ECLASS-13.0	27250101

ETIM

ETIM 9.0	EC000897
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017
<https://www.phoenixcontact.com/us/products/1953017>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

Accessories



Note: Applying some accessories below might limit this product.

IS-K 4 - Bridge bar isolator

1302338

<https://www.phoenixcontact.com/us/products/1302338>



Bridge bar isolator, color: gray

ISSBI 10- 6 - Bridge

0301505

<https://www.phoenixcontact.com/us/products/0301505>



Bridge, pitch: 6 mm, number of positions: 10, color: silver



Max. current carrying capacity: 24 A

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

FBI 100- 6 - Fixed bridge

0201650

<https://www.phoenixcontact.com/us/products/0201650>

Fixed bridge, pitch: 6.2 mm, number of positions: 100, color: silver



FBI 10- 6 - Fixed bridge

0203250

<https://www.phoenixcontact.com/us/products/0203250>

Fixed bridge, pitch: 6.2 mm, number of positions: 10, color: silver



 Max. current carrying capacity: 24 A

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

FBI 20- 6 - Fixed bridge

0201867

<https://www.phoenixcontact.com/us/products/0201867>



Fixed bridge, pitch: 6.2 mm, number of positions: 20, color: silver

D-UVKB 4 - End cover

1920024

<https://www.phoenixcontact.com/us/products/1920024>



End cover, depth: 34 mm, width: 2.2 mm, height: 68 mm, color: gray

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

TS-K - Separating plate

1302215

<https://www.phoenixcontact.com/us/products/1302215>



Separating plate, depth: 22 mm, width: 0.5 mm, height: 22 mm, color: gray

SBS 6:UNBEDRUCKT - Marker card

1007222

<https://www.phoenixcontact.com/us/products/1007222>



Marker card, Card, white, unlabeled, can be labeled with: Marker pen, mounting type: snapped, snap into flat marker groove, for terminal block width: 6 mm, lettering field size: 6 x 6.1 mm, Number of individual labels: 250

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

NS 32 PERF 2000MM-VPE 10 - DIN rail perforated

1201002

<https://www.phoenixcontact.com/us/products/1201002>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver

NS 32 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201015

<https://www.phoenixcontact.com/us/products/1201015>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>



DIN rail end piece, for DIN rail NS 35/15

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

ZB 6:UNBEDRUCKT - Zack marker strip

1051003

<https://www.phoenixcontact.com/us/products/1051003>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

ZB 6 CUS - Zack marker strip

0824992

<https://www.phoenixcontact.com/us/products/0824992>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

ZB 6,LGS:FORTL.ZAHLEN - Zack marker strip

1051016

<https://www.phoenixcontact.com/us/products/1051016>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

ZB 6,QR:FORTL.ZAHLEN - Zack marker strip

1051029

<https://www.phoenixcontact.com/us/products/1051029>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

ZB 6,LGS:GLEICHE ZAHLEN - Zack marker strip

1051032

<https://www.phoenixcontact.com/us/products/1051032>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

ZB 6,LGS:L1-N,PE - Marker for terminal blocks

1051414

<https://www.phoenixcontact.com/us/products/1051414>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

ZB 6,LGS:U-N - Marker for terminal blocks

1051430

<https://www.phoenixcontact.com/us/products/1051430>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: U, V, W, N, GND, U, V, W, N, GND, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

UC-TM 6 - Marker for terminal blocks

0818085

<https://www.phoenixcontact.com/us/products/0818085>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

UC-TM 6 CUS - Marker for terminal blocks

0824589

<https://www.phoenixcontact.com/us/products/0824589>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

UCT-TM 6 - Marker for terminal blocks

0828736

<https://www.phoenixcontact.com/us/products/0828736>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

UCT-TM 6 CUS - Marker for terminal blocks

0829602

<https://www.phoenixcontact.com/us/products/0829602>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/us/products/3022218>

Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray



CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/us/products/3022276>

Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray



UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017


<https://www.phoenixcontact.com/us/products/1953017>

E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/us/products/0800886>

End clamp, width: 9.5 mm, color: gray



E/UK - End bracket

1201442

<https://www.phoenixcontact.com/us/products/1201442>

End bracket, Mounting on a DIN rail NS 32 or NS 35, material: PA, color: gray



UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

E/UK 1 - End bracket

1201413

<https://www.phoenixcontact.com/us/products/1201413>



End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray

PSBJ 3/13/4 - Test plug strip

0201304

<https://www.phoenixcontact.com/us/products/0201304>



Test plug strip, number of positions: 1, color: silver

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

PSB 3/10/4 - Test plug strip

0601292

<https://www.phoenixcontact.com/us/products/0601292>



Test plug strip, number of positions: 1, color: silver

C-SCF 1/2,8X0,5 - Connector

3240152

<https://www.phoenixcontact.com/us/products/3240152>



Slip-on sleeve, non-insulated, 0.5 ... 1 mm², 2.8 x 0.5

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

C-SCFI 1,5/2,8X0,5 - Connector

3240048

<https://www.phoenixcontact.com/us/products/3240048>



Slip-on sleeve, red, 0.5 ... 1.5 mm², 2.8 x 0.5

C-SCF 1/2,8X0,8 - Connector

3240153

<https://www.phoenixcontact.com/us/products/3240153>



Slip-on sleeve, non-insulated, 0.5 ... 1 mm², 2.8 x 0.8

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

C-SCFI 1,5/2,8X0,8 - Connector

3240049

<https://www.phoenixcontact.com/us/products/3240049>



Slip-on sleeve, red, 0.5 ... 1.5 mm², 2.8 x 0.8

C-SCF 1,5/6,3X0,8 - Connector

3240156

<https://www.phoenixcontact.com/us/products/3240156>



Slip-on sleeve, non-insulated, 0.5 ... 1.5 mm², 6.3 x 0.8

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

C-SCFI 1,5/6,3X0,8 - Connector

3240052

<https://www.phoenixcontact.com/us/products/3240052>



Slip-on sleeve, red, 0.5 ... 1.5 mm², 6.3 x 0.8

C-SCF 2,5/6,3X0,8 - Connector

3240159

<https://www.phoenixcontact.com/us/products/3240159>



Slip-on sleeve, non-insulated, 1.5 ... 2.5 mm², 6.3 x 0.8

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

C-SCFI 2,5/6,3X0,8 - Connector

3240055

<https://www.phoenixcontact.com/us/products/3240055>



Slip-on sleeve, blue, 1.5 ... 2.5 mm², 6.3 x 0.8

C-SCF 6/6,3X0,8 - Connector

3240160

<https://www.phoenixcontact.com/us/products/3240160>



Slip-on sleeve, non-insulated, 4 ... 6 mm², 6.3 x 0.8

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

C-SCFI 6/6,3X0,8 - Connector

3240056

<https://www.phoenixcontact.com/us/products/3240056>



Slip-on sleeve, yellow, 4 ... 6 mm², 6.3 x 0.8

PT/FS 2,8 - Insulating sleeve

1406700

<https://www.phoenixcontact.com/us/products/1406700>



Insulating sleeve, as touch protection, slide onto the conductor before for 2.8 slip-on sleeves

UVKB 4-FS/FS(8-2,8-0,8) - Feed-through terminal block



1953017

<https://www.phoenixcontact.com/us/products/1953017>

PT/FS 6,3 - Insulating sleeve

0604707

<https://www.phoenixcontact.com/us/products/0604707>



Insulating sleeve, as touch protection, slide onto the conductor before for 6.3 slip-on sleeves

SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/us/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com