

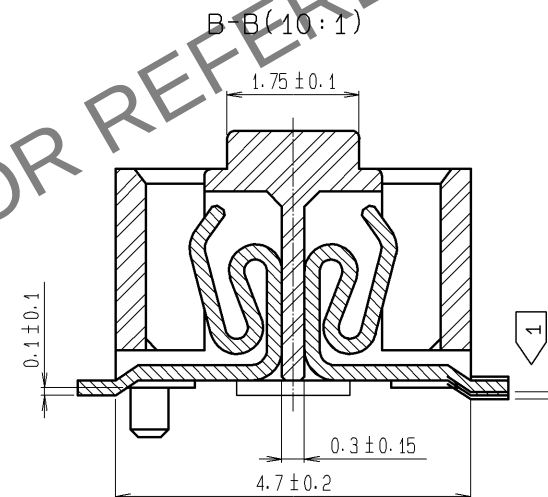
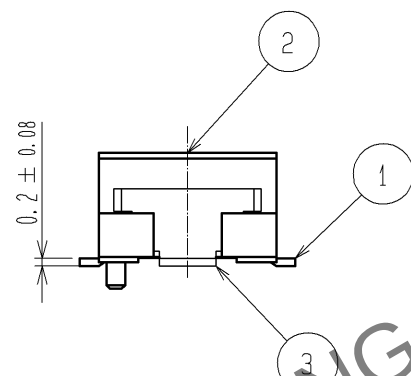
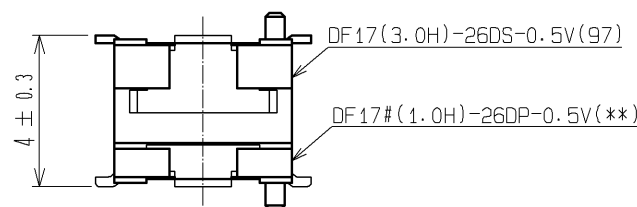
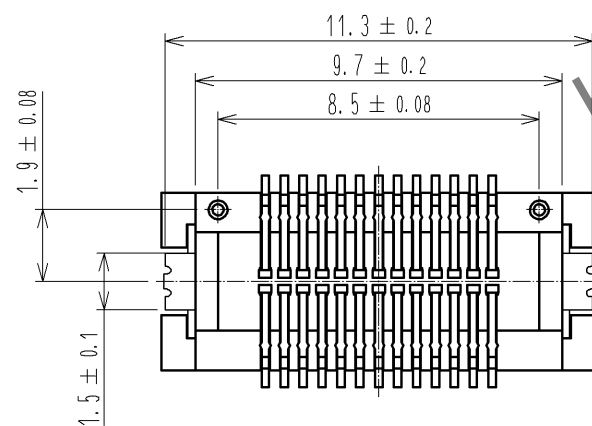
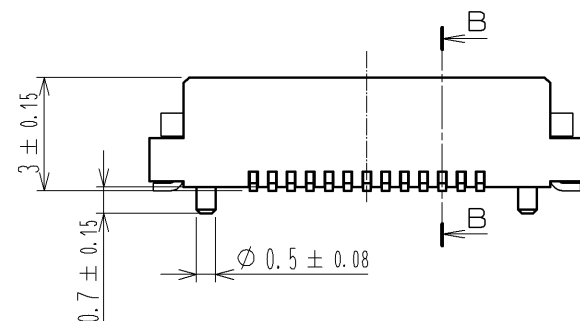


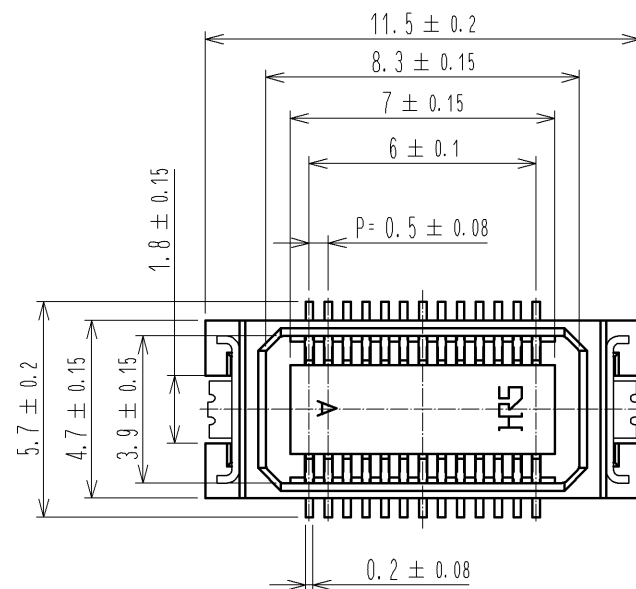


RECOMMENDED PATTERN

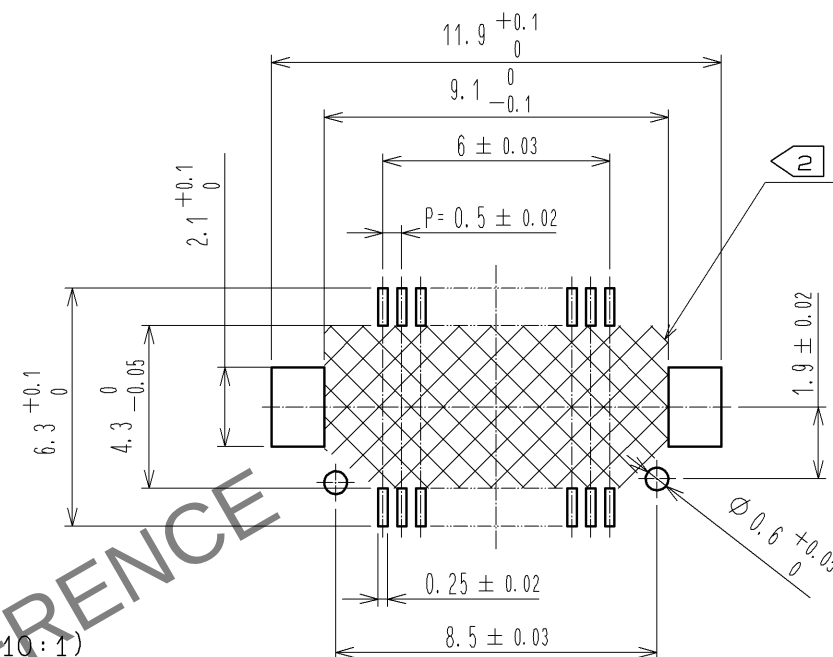

- NOTES
- 1 LEAD CO-PLANARITY INCLUDE REINFORCED METAL FITTINGS SHALL BE 0.1mm MAX.
 - 2 WATCH NOT LET THE CONTACTS TOUCH THE SECTION ESPECIALLY WHEN THE PADS OF AREA NOT RESIST FINISHED.

			7	PS	CLEAR (REINFORCEMENT COLLAR)
			6	PS	BLACK (PLASTIC REEL)
2	POLYAMIDE (PA6T)	WHITE BEIGE , UL94V-0	5	POLYESTER	CLEAR (COVER TAPE)
1	PHOSPHER BRONZE	CONTACT AREA : GOLD PLATED 0.1μm min LEAD AREA : GOLD PLATED 0.02μm min UNDER PLATING : NICKEL 1μm min	4	PS	CLEAR (EMBOSSED CARRIER TAPE)
			3	PHOSPHER BRONZE	TIN PLATED 1μm min UNDER PLATING : NICKEL 1μm min
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : KH. IKEDA		13.06.27	DRAWING NO. EDC3-162004-97			
		CHECKED : TS. MIYAZAKI		13.06.26	PART NO. DF17(3.0H)-26DS-0.5V(97)			
		DESIGNED : TY. YAMASAKI		13.06.26	CODE NO. CL683-0253-2-97			
		DRAWN : NT. SEKI		13.06.26	 1/2			

