




Part Number : [1552410026](#)
Product Description : Flamar Sensor Cable,
TPE Jacket, Braided Shielding Overall, 5
Circuits, 0.34mm² / 22 AWG, 6.40mm (.252")
Diameter, 500.0m (1640.42') Length, Black
Series Number : 155241
Status : Active
Product Category : Industrial Cable
Engineering Number : 1X500M

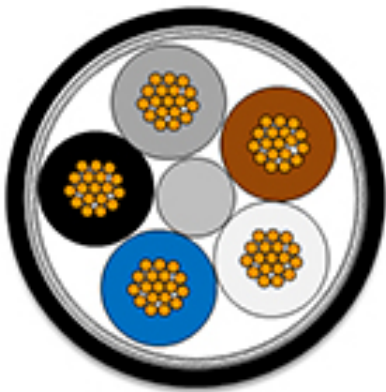

Documents & Resources

Specifications
[1552400001-P1E.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)4144-DC (27 June 2024)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

Part Details

General

Status	Active
Category	Industrial Cable
Series	155241
Description	Flamar Sensor Cable, TPE Jacket, Braided Shielding Overall, 5 Circuits, 0.34mm ² / 22 AWG, 6.40mm (.252") Diameter, 500.0m (1640.42') Length, Black
Geographic Area	Global
Product Family	Flamar Standard and Custom Cables for Industrial Automation
Product Name	Flamar,Signal and Control
UPC	889056458924

Agency

CSA	LL107556
UL	E470965

Electrical

Current - Maximum per Contact	Contact Molex
Voltage - Maximum	300V

Physical

Bending Radius - Minimum	> 10xOD
Cable Length	500.0m
Circuits (Loaded)	5
Color - Cable Jacket	Black
Insulation	PVC
Material - Outer Jacket	TPE
Net Weight	0.062/kg
Outer Jacket Diameter	6.40mm
Packaging Type	Reel
Temperature Range - Operating	-40° to +105°C

Wire/Cable Type	UL Listed PLTC
Wire Size (AWG)	22
Wire Size mm ²	0.34

Use with Part(s)

Description	Part Number
Micro-Change (M12) Field Attachable Connectors	<u>120071</u>
Ultra-Lock (M12) Single Keyway Field Attachable Connectors	<u>120085</u>
Nano-Change (M8) Field Attachable Connectors	<u>120091</u>