

Model 23

4mm Square

Sealed Single Turn

Surface Mount

Cermet Trimming Potentiometer



ELECTRICAL

Standard Resistance Range	100 Ohms to 2 Megohms
Standard Resistance Tolerance	±20%
Input Voltage	200 Vdc Max. or rms not to exceed power rating
Power Rating	0.25 Watts at 70°C derating to 0 at 125°C
End Resistance	1% or 3 Ohms Max., whichever is greater
Actual Electrical Travel	200° nominal
Dielectric Strength	500 Vrms
Insulation Resistance	100 Megohms Min.
Resolution	Essentially infinite
Contact Resistance Variation	2% or 3 Ohms Max., whichever is greater

ENVIRONMENTAL

Seal	85°C Fluorinert® (No Leaks)
Temperature Coefficient	±100 ppm/°C (<200 Ohms or >1Meg = ±250 ppm/°C)
Operating Temperature Range	-55°C to +125°C
Thermal Shock	Five cycles -55°C to +125°C (2% ΔRT, 2% ΔVR)
Moisture Resistance	Ten 24 hour cycles (3% ΔRT)
Shock	6 ms sawtooth, 100 G's (1% ΔRT, 1% ΔVR)
Vibration	20 G's, 10 to 2,000 Hz (1% ΔRT, 1% ΔVR)
High Temperature Exposure	250 hours at 125°C (2% ΔRT, 2% ΔVR)
Rotational Life	100 cycles (5% ΔRT)
Load Life	1,000 hours at 70°C & 0.25 Watts (3% ΔRT, 1% ΔVR)
Resistance to Solder Heat	260°C for 10 sec. (1% ΔRT)

MECHANICAL

Mechanical Stops	Solid
Stop Strength	4 oz.-in. Min. (300 g-cm)
Torque	2 oz.-in. Max. (150 g-cm)
Weight	0.005 oz. nominal (0.14 grams)


*Specifications subject to change without notice.
Fluorinert® is a registered trademark of 3M Company.*

Model 23

STANDARD RESISTANCE VALUES

100	1K	10K	100K	1Meg
200	2K	20K	200K	2Meg
500	5K	50K	500K	

CIRCUIT DIAGRAM

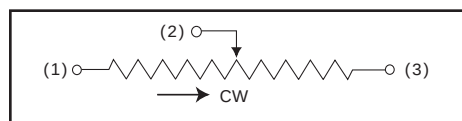


PACKAGING

Standard (no code): Boxes. Capacity = 100 units.


Option (TR code): Tape & Reel. All units oriented with #2 (slider) pin adjacent to sprocket holes.

	Pin Style	A,B	S
Tape	Width =	12 mm	12 mm
	Sprocket =	4 mm pitch	4 mm pitch
	Capacity =	500 units	750 units
Reel	Diameter =	7" (178 mm)	10" (254 mm)


ORDERING INFORMATION

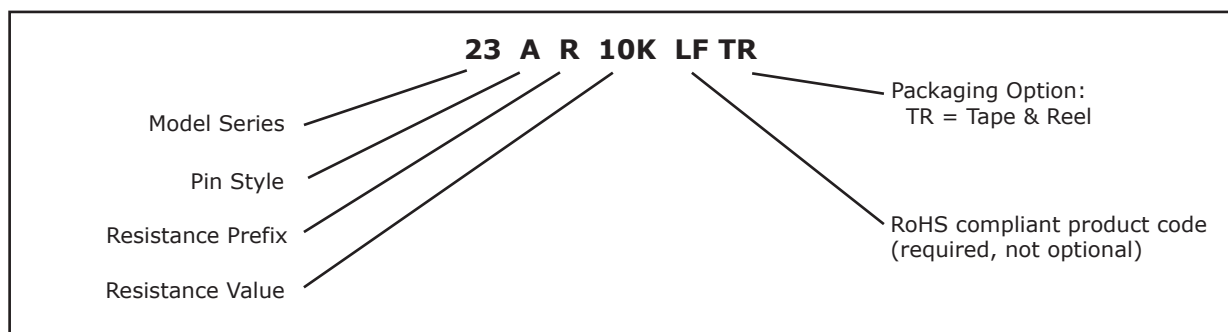

RECOMMENDED PCB LAYOUT

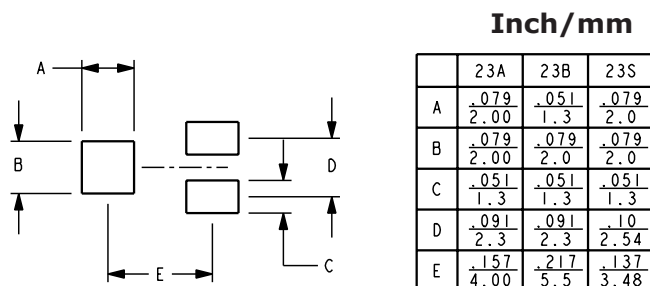


THROUGH HOLE

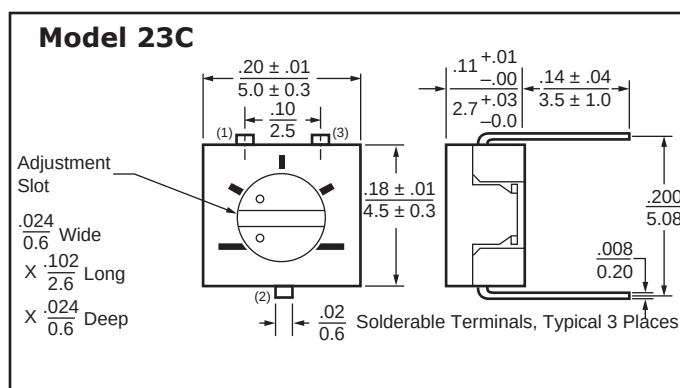


Model 23

TOP ADJUSTMENT

Model 23A - J Hook

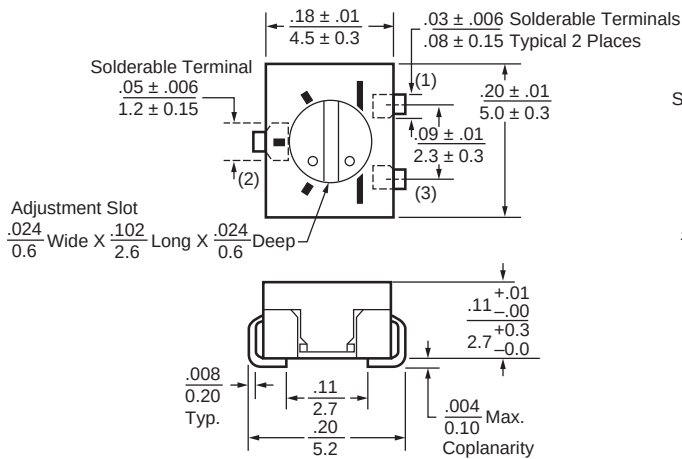


Model 23B - Gull Wing

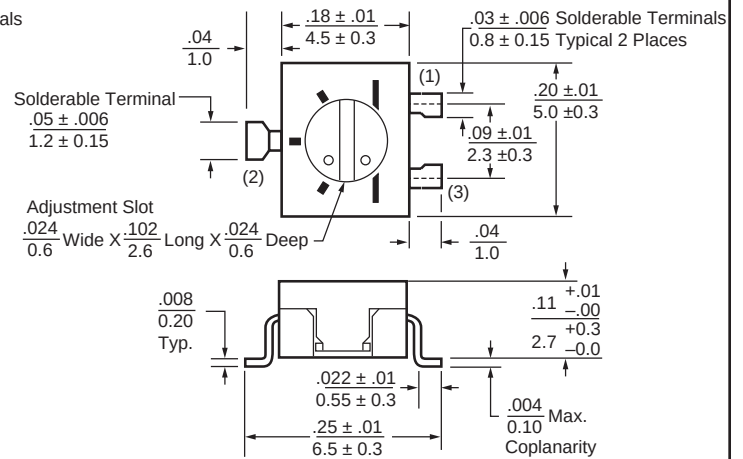

SIDE ADJUSTMENT

Model 23S

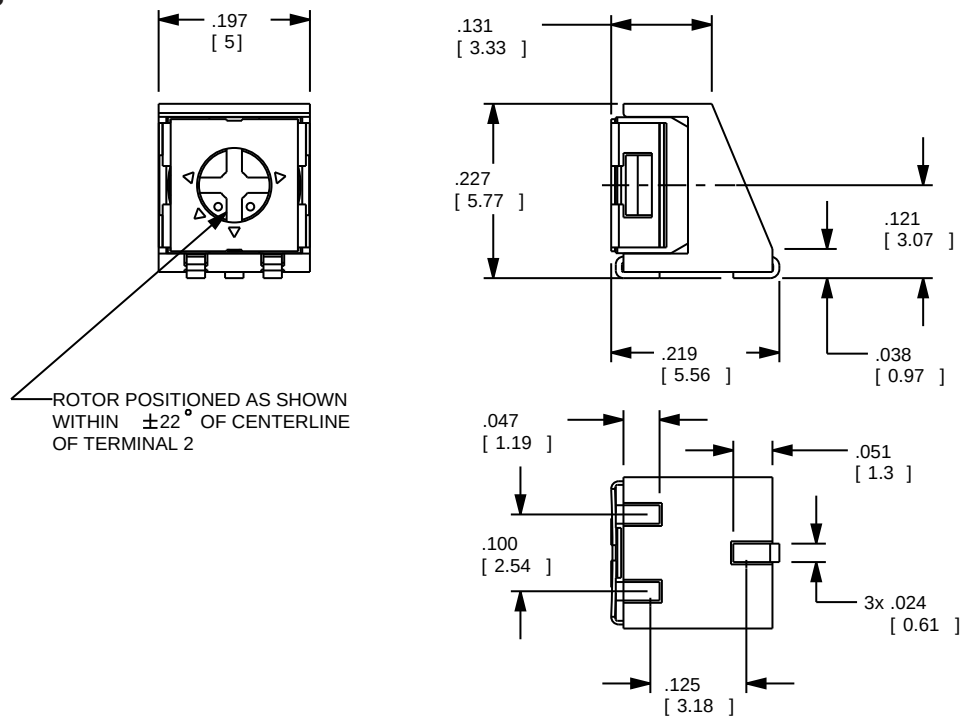

1. Dimensions in inch/mm
2. Tolerances ± 0.01 inch (0.3 mm) unless otherwise specified

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TT Electronics:

[22AR500KTR](#) [23AR10KTR](#) [23AR2KTR](#) [23BR1KTR](#) [23BR20KTR](#) [23BR2KTR](#) [44WR100KT7](#) [44WR10KT7](#)
[44WR10KTB](#) [44WR1KLFT7](#) [44WR1KT7](#) [44WR200T7](#) [44WR20KT7](#) [44WR250KT7](#) [44WR2KT7](#) [44WR5KT7](#)
[23SR100KLFT7](#) [22AR100TR](#) [22AR10KTR](#) [22AR1KTR](#) [22AR200KTR](#) [22AR200TR](#) [22AR20KTR](#) [22AR2KTR](#)
[22AR500TR](#) [23AR100KTR](#) [23AR100TR](#) [23AR1KTR](#) [23AR200KTR](#) [23AR200TR](#) [23AR20KTR](#) [23AR500TR](#)
[23BR100KTR](#) [23BR100TR](#) [23BR10KTR](#) [23BR200KTR](#) [23BR200TR](#) [23BR500KTR](#) [23BR500TR](#) [44WR100KTB](#)
[44WR100T7](#) [44WR100TB](#) [44WR10T7](#) [44WR10TB](#) [44WR1KTB](#) [44WR200KT7](#) [44WR200KTB](#) [44WR200TB](#)
[44WR20KTB](#) [44WR20T7](#) [44WR20TB](#) [44WR250KTB](#) [44WR25KT7](#) [44WR25KTB](#) [44WR2KTB](#) [44WR500KT7](#)
[44WR500KTB](#) [44WR500T7](#) [44WR500TB](#) [44WR50T7](#) [44WR50TB](#) [23SR2KLFT7](#) [44GR10KLFT7](#) [44GR1KLFT7](#)
[44GR5KLFTB](#) [44JR100KLFTB](#) [44JR10KLFTB](#) [44JR1KLFTB](#) [44JR20KLFT7](#) [44JR20KLFTB](#) [44JR2KLFTB](#)
[44JR500KLFTB](#) [44JR500LFT13](#) [44JR500LFT7](#) [44JR50KLFT13](#) [44JR5KLFT13](#) [44WR5KLFTB](#) [83PR500LF](#)
[23SR1KLFT7](#) [23SR10KLFT7](#) [22SR10KLFT7](#) [22SR1MEGLFT7](#) [22AR500LFT7](#) [22AR200LFT7](#) [23BR200KLFT7](#)
[23BR100KLFT7](#) [23BR500KLFT7](#) [22AR10TR](#) [23AR10TR](#) [44WR20LFTB](#) [22AR2KLFT7](#) [23AR25KLFT7](#)
[44WR50KLFTB](#) [44WR10KLFTB](#) [44WR20KLFTB](#) [23AR20TR](#) [22AR20TR](#) [44WR20KLFT7](#) [44WR50KLFT7](#)
[44WR10KLFT7](#)