




Connectors > Contacts > Connector Contacts

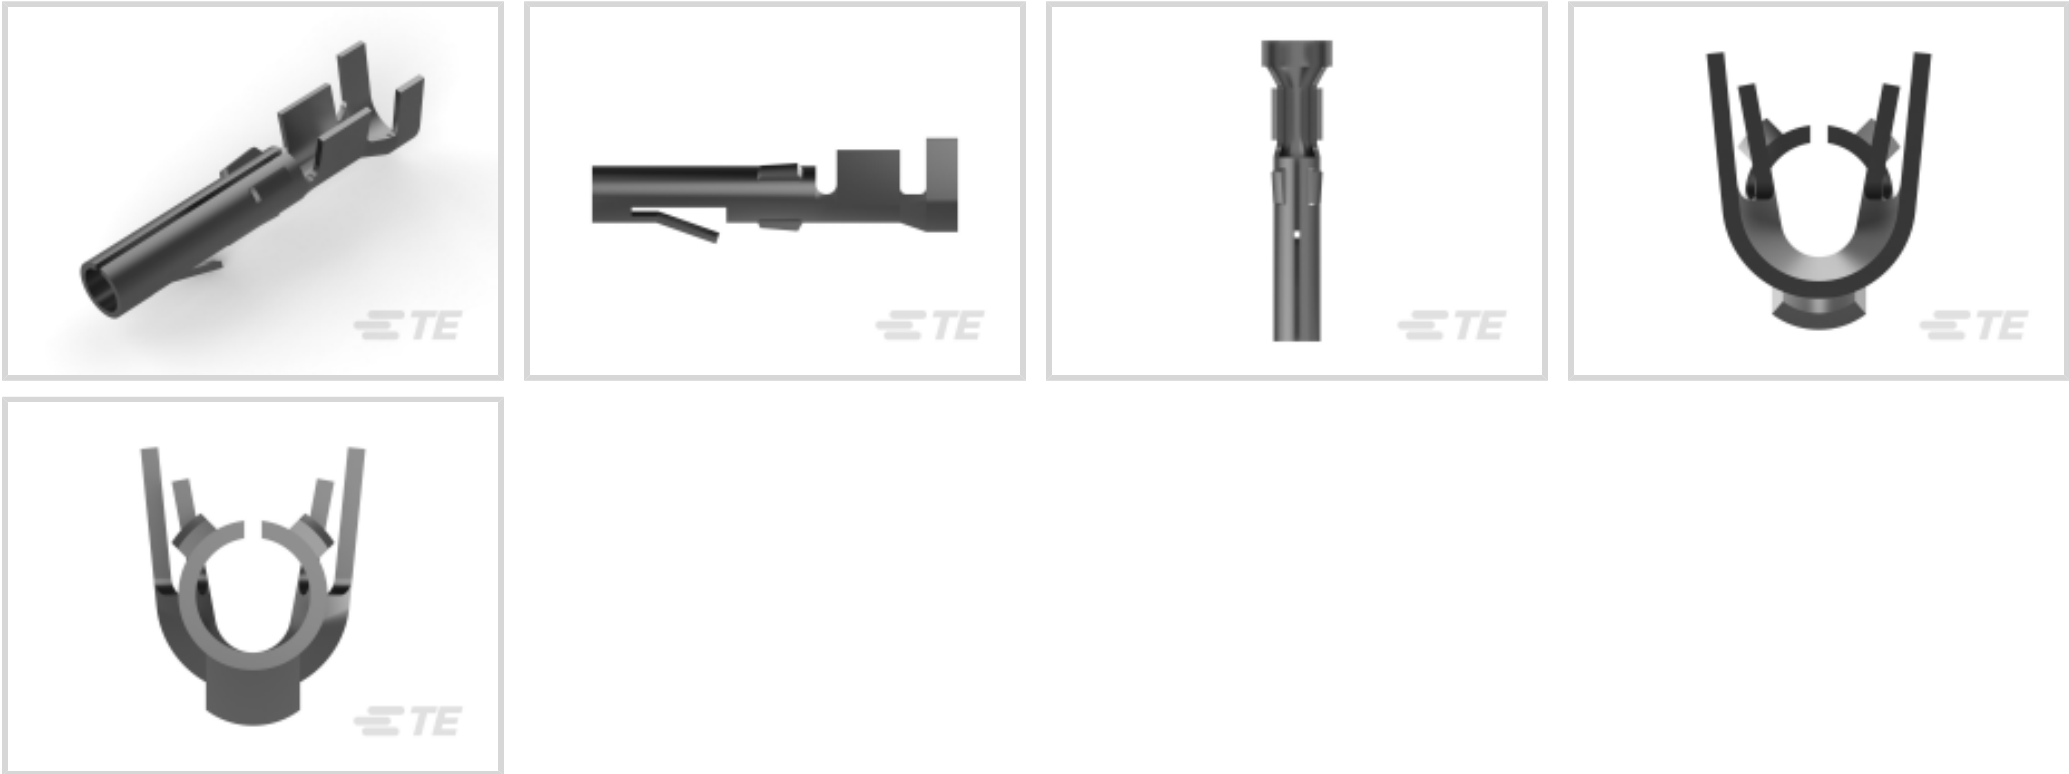

Contact Type: **Socket**

Contact Mating Area Plating Material: **Tin**

Wire Contact Termination Area Plating Material: **Tin**

Operating Voltage: **250 VAC**

Contact Retention Within Housing: **With**

Features

Product Type Features

|                    |          |
|--------------------|----------|
| Discrete Wire Type | Stranded |
|--------------------|----------|

Electrical Characteristics

|                   |         |
|-------------------|---------|
| Operating Voltage | 250 VAC |
|-------------------|---------|

Contact Features

|                                                       |                  |
|-------------------------------------------------------|------------------|
| Mating Pin Diameter                                   | 2.13 mm[.084 in] |
| Wire Contact Termination Area Plating Material Finish | Matte            |
| Contact Shape & Form                                  | Round            |
| Contact Orientation                                   | Straight         |
| Barrel Type                                           | Open             |
| Contact Type                                          | Socket           |
| Contact Mating Area Plating Material                  | Tin              |
| Wire Contact Termination Area Plating Material        | Tin              |
| Contact Retention Within Housing                      | With             |
| Contact Base Material                                 | Phosphor Bronze  |



|                              |      |
|------------------------------|------|
| Contact Current Rating (Max) | 15 A |
|------------------------------|------|

Termination Features

|                                    |              |
|------------------------------------|--------------|
| Termination Method to Wire & Cable | Crimp        |
| Product Terminates To              | Wire & Cable |

Mechanical Attachment

|                                       |               |
|---------------------------------------|---------------|
| Wire Insulation Support               | Without       |
| Contact Retention Type Within Housing | Locking Lance |

Dimensions

|                                      |                            |
|--------------------------------------|----------------------------|
| Compatible Insulation Diameter Range | 3.3 mm[.13 in]             |
| Wire Size                            | .52 – 2.08 mm <sup>2</sup> |

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -55 – 105 °C[-67 – 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

|                     |       |
|---------------------|-------|
| Circuit Application | Power |
|---------------------|-------|

Packaging Features

|                    |           |
|--------------------|-----------|
| Packaging Quantity | 1000      |
| Packaging Method   | Bag & Box |

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2024 (241)<br>Candidate List Declared Against: JUNE 2024 (241)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                             |
| Solder Process Capability                     | Not applicable for solder process capability                                                                                    |

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

|                                                                                                                                                  |                                                                                                                                                 |                                                                                                                                                    |                                                                                                                                                  |
|--------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>TE Part # 91504-1<br/>CCII CMNL MNL PIN SKT 20-14 ASSY</p> |  <p>TE Part # 465644-1<br/>EXTRACTION TOOL</p>               |  <p>TE Part # 455830-1<br/>INSERTION TOOL</p>                  |  <p>TE Part # 1-171196-0<br/>6 POS MATE-N-LOK S</p>          |
|  <p>TE Part # 1-480274-0<br/>09P CMNL PLUG HSG P/M NATL</p>   |  <p>TE Part # 1-480284-0<br/>08P CMNL CAP HSG M/M NATL</p>  |  <p>TE Part # 1-480438-0<br/>16P CMNL PLUG HSG M/M NATL</p>   |  <p>TE Part # 1-480683-0<br/>02P CMNL PLUG HSG F/H NATL</p> |
|  <p>TE Part # 1-480277-0<br/>09P CMNL CAP HSG P/M NATL</p>    |  <p>TE Part # 1-480304-0<br/>03P CMNL PLUG HSG P/M NATL</p> |  <p>TE Part # 1-480722-0<br/>04P CMNL PLUG HSG W/LCK NATL</p> |  <p>TE Part # 1-480276-0<br/>06P CMNL CAP HSG P/M NATL</p>  |
|  <p>TE Part # 1-480285-0<br/>10P CMNL PLUG HSG M/M NATL</p>   |  <p>TE Part # 1-480439-0<br/>16P CMNL CAP HSG M/M NATL</p>  |  <p>TE Part # 1-480393-1<br/>02P CMNL PLUG HSG F/H BLK</p>    |  <p>TE Part # 1-480345-0<br/>08P CMNL CAP HSG F/H NATL</p>  |



TE Part # 1-480340-0  
06P CMNL CAP HSG F/H NATL



TE Part # 1-480278-0  
12P CMNL CAP HSG P/M NATL



TE Part # 1-480425-0  
04P CMNL PLUG HSG P/M NATL



TE Part # 1-480324-0  
15P CMNL CAP HSG P/M NATL

Also in the Series | Commercial MATE-N-LOK



Connector Caps & Covers(2)



Connector Contacts(150)




Connector Seals & Cavity Plugs(1)



Crimp Wire Pins, Tabs & Ferrules(2)



Insertion & Extraction Tools(3)

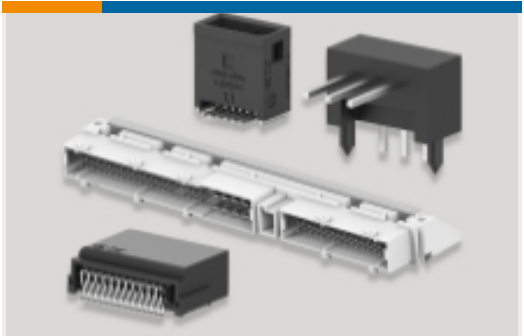

PCB Headers & Receptacles(56)



Rectangular Connector Housings(9)



Rectangular Power Connectors(115)



Standard Circular Connectors(2)



Standard Rectangular Connectors(2)

Customers Also Bought




TE Part #2274000-1  
ZSFP+ 1X1 CAGE ASSEMBLY PRESSFIT WITH LP



TE Part #6-1617813-3  
TD229-5003P= TDFR 500 S M83726/29-5003P




TE Part #3-1617004-2  
B07D692BZ2-0011 = M5757/23-001

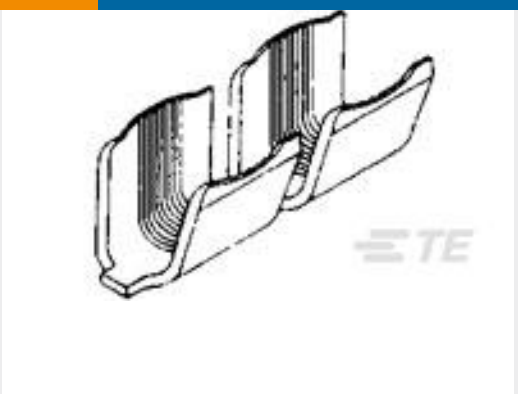

TE Part #41766  
SPLC AMVAR 3000-7000 020BR




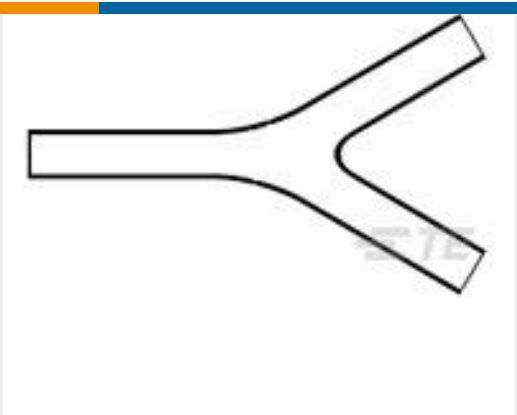

TE Part #462389-000  
[381A302-51/164-0](#)



TE Part #62044-1  
[MIN AMVAR SPL 480-1700 016BR](#)

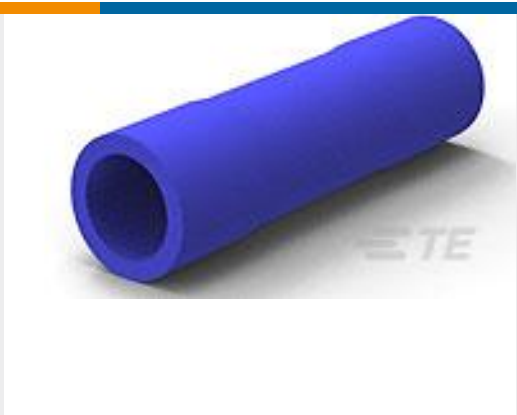

TE Part #34133  
[SPLICE,PG PARA 16-14](#)



TE Part #1969443-2  
[EP 2.5 TPA Retainer, 2 Pos](#)



TE Part #3-1437667-1  
[4DB-P108-08=4DB ASSEMBLY](#)



TE Part #2355002-1  
[MT Ferrule Kit,Plug,Without Pins,12-F,MM](#)

Documents

Product Drawings

[CMNL SOK PTPPHBZ L/P](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_60619-4\\_Y.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_60619-4\\_Y.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_60619-4\\_Y.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[SOFT\\_SHELL\\_PIN\\_SOCKET\\_CONNECTORS\\_STANDARD\\_DENSITY](#)

English

Product Specifications

[Application Specification](#)

English

Instruction Sheets

[Instruction Sheet \(U.S.\)](#)

60619-4

Socket Contact, Tin, 250 VAC, Locking Lance Contact Retention, 20 – 14 AWG Wire Size, .52 – 2.08 mm<sup>2</sup> Wire Size, Crimp, Commercial MATE-N-LOK



English