

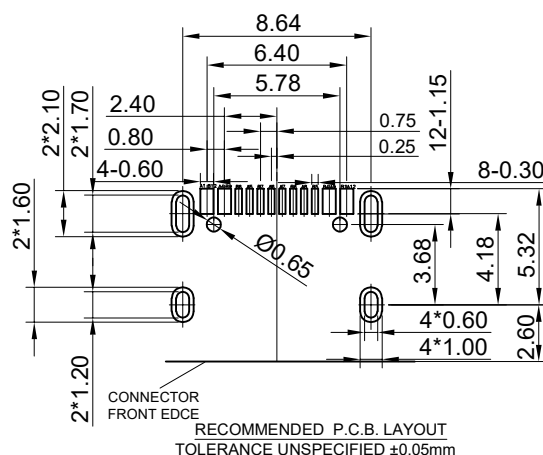
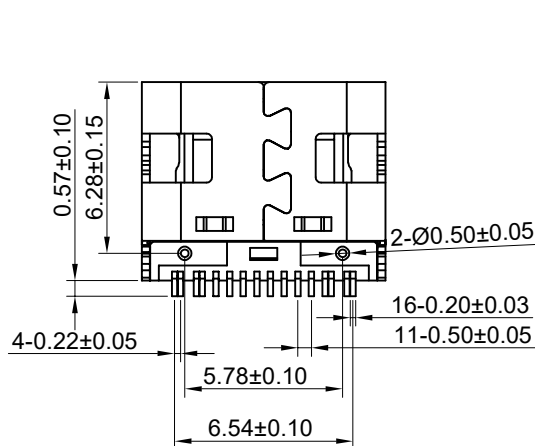
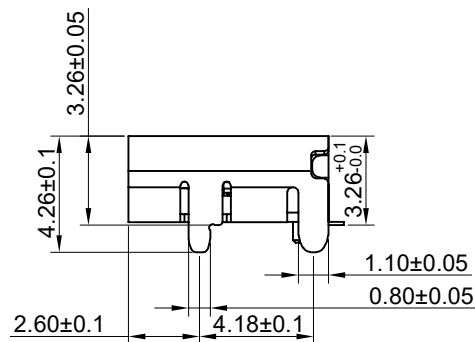
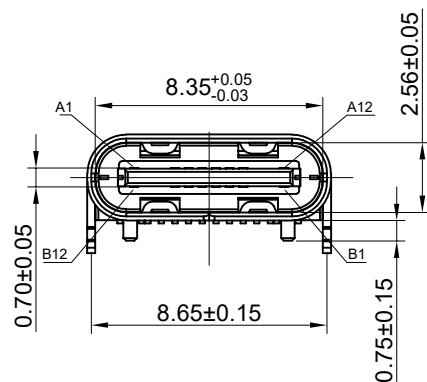



NOTES: SPECIFICATION:

1. CURRENT RATING: 8A MAX
2. VOLTAGE: 20V MAX. WITHSTANDING VOLTAGE: 100V AC
3. TEMPERATURE RANGE: -40 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES



A1	GND	B12	GND	6	SHELL	STAINLESS STEEL SUS201	NI/SN Plated	1PCS
A4	VBUS	B9	VBUS	5	SHIELDING PLATE	STAINLESS STEEL SUS304	---	1PCS
A5	CC1	B8	SBU2	4	MD	HIGH TEMPERATURE PLASTIC	BIUE	1PCS
A6	DP1	B7	DN2	3	CONTACT	COPPER ALLOY C18400	Au15U"/NI50U"/AU1U" Plated	1SET
A7	DN1	B6	DP2	2	CONTACT	COPPER ALLOY C18400	Au15U"/NI50U"/AU1U" Plated	1SET
A8	SBU1	B5	CC2	1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
A9	VBUS	B4	VBUS					
A12	GND	B1	GND					
PIN	SIGNAL NAME	PIN	SIGNAL NAME	NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

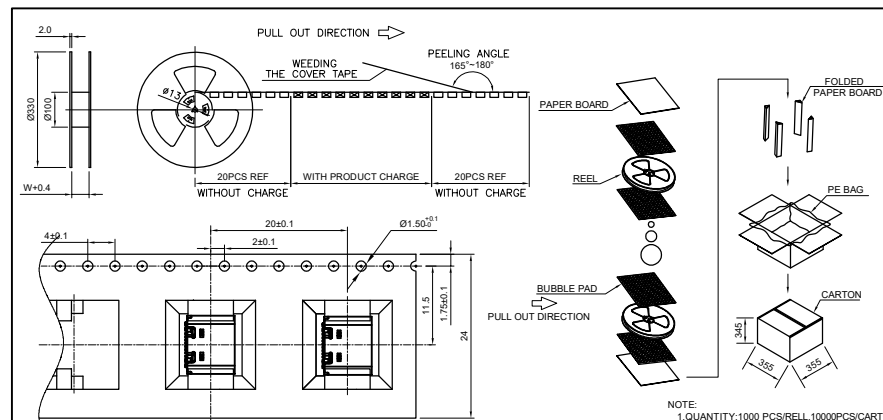

G-Switch Electronic (HongKong) CO.,Ltd.

Unless otherwise specified, Tolerance:
X. ±0.30
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
Angles ±3°

DESIGN Li Qingqi
CHECKED
APPROVED
<http://www.dg-switch.com>
TEL:0769-82388879

DATE 2021.11.11
DATE
DATE
REV.: X1
SIZE: A4

Molde code:
GT-USB-7010E
SCALE: 4:1
SHEET: 1/1
UNIT: mm