

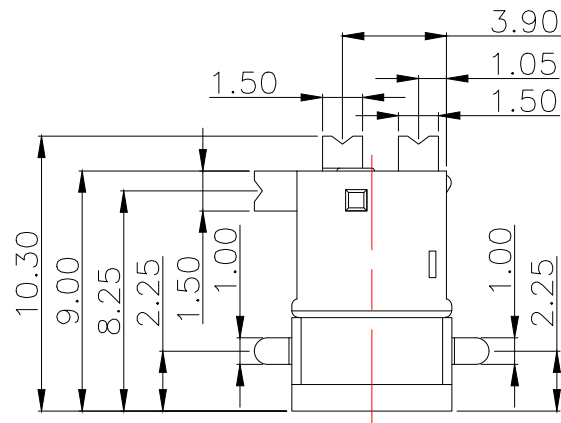
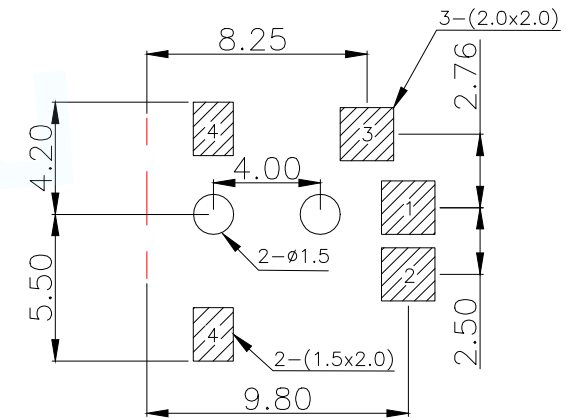
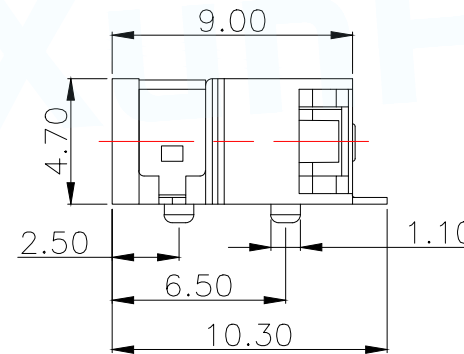


RECOMMEND PULG

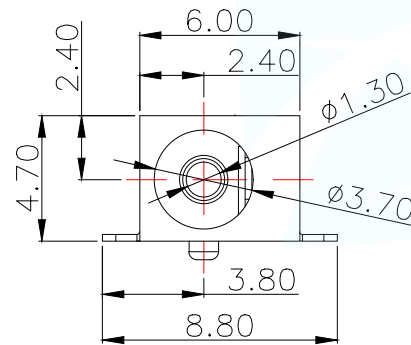



PCB.WELDING DRAWING (TOLERANCE:±0.05)

Main technical performance	
Rated electrical load	DC 12V 2A
Contact resistance	$\leq 0.03\Omega$
Insulation resistance	$\geq 100M\Omega$ DC250V
Pressure resistance	AC 500V 1min
Insertion force	3-30N
Operating temperature range	-20C°~+70C°
service life	5000cycles






SCHEMATIC

4	TERMINAL	1	BRASS	MB:CuSn PLATED
3	HOUSING	1	PPA	BLACK
2	TIP SPRING	1	PHOSPHOR BRONZE	MB:CuSn PLATED
1	CENTER PIN	1	BRASS	MB:CuSn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK
MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: DC SOCKET		
DECIMALS:		PAR		
X.X±0.30		DWN		
X.XX±0.25		CHKD		
X.XXX±0.15		APVD		
ANGLES:		SCALE N:A		
X.*±5°		UNIT:MM		
X.X'±1°		SIZE:A4		
CUSTOMER COPY		SHEET:1F1		
		REV:A		

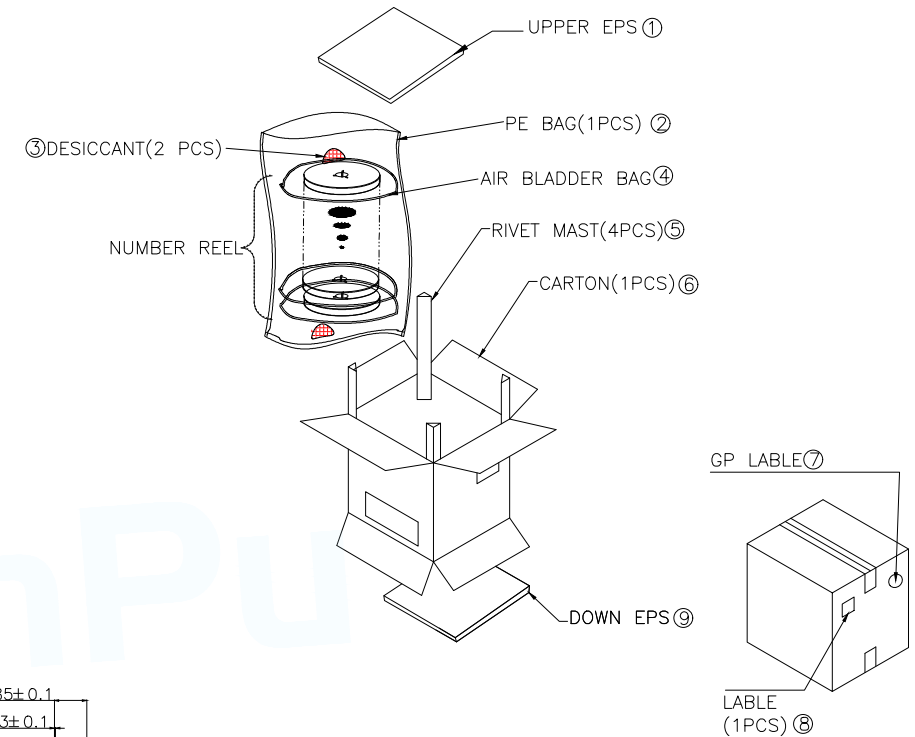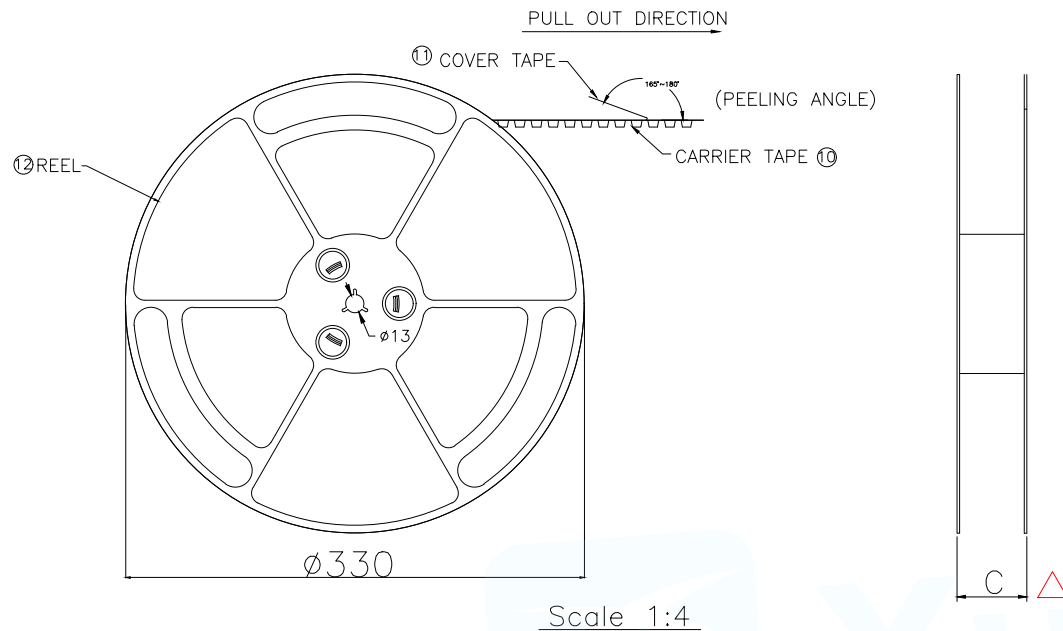

NOTES :

- 1.CARTON SPEC. :350 *350 *350mm(OUT DIM) ,
PAPPER THICKNESS =5mm
- 2.UPPER and DOWN EPS: 350*350mm
THICKNESS =8mm.
- 3.THE COVER TAPE PEELING FORCE:30~100g.
- 4.PER REEL CASED ONE AIR BLADDER BAG.
- 5.CARRIER TAPE COLOR:BLACK.

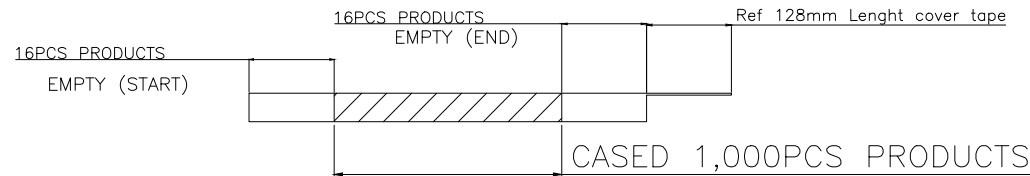

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			
DECIMALS:	ANGLES:	TITLE: DC SOCKET	
.X:±0.30	.X':±5°	PAR	DC-045B-B130
.XX:±0.20	.XX':±3°	DWN	
.XXX:±0.10	.XXX':±1°	CHKD	
CUSTOMER COPY		APVD	
		SCALE:1:1	UNIT:MM
		SIZE:A4	SHEET:1F1
			REV:A