




HEAT SHRINK TUBING

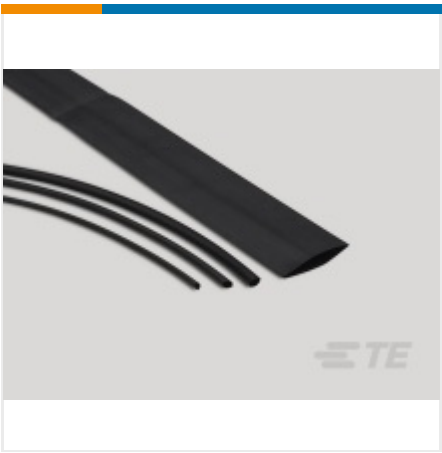

✓ Active

TE CONNECTIVITY (TE)
X4-13.0-0-FSP
Raychem | SWFR X4

EJ2608-000
TE Internal Number: EJ2608-000

- EU RoHS Compliant
- EU ELV Compliant
- Wall Type Single
- Resistant To Mechanical Damage
- Low Outgassing No
- Product Source China
- Packaging Method Spool

↓ **PRODUCT DRAWING**
English

DOCUMENTATION

Product Drawings

SWFR X4 SINGLE WALL HEAT SHRINKABLE TUBING
PDF
English

Catalog Pages/Data Sheets

1-1773894-4_SWFR_Tubing
PDF
English

Very-Thin-Wall, Highly Flame-Retardant, Zero Halogen, Metric-Sized Heat-Shrinkable Tubing
PDF
English

FEATURES



Please review product documents or [contact us](#) for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

Wall Type Single
Product Family X4

Electrical Characteristics

Voltage (Max) (kV) .3

Body Features

Shrink Ratio 2:1
Color Black
Flexibility Very Flexible
Material ZEROHAL Polyolefin
Fluid Type Water

Dimensions

Recovered Wall Thickness (Nominal) .41 mm [.016 in]
Expanded Inside Diameter (Min) 13.7 mm [0.539 in]
Recovered Inside Diameter (Max) 6.5 mm [.256 in]

Usage Conditions

Resistant To Mechanical Damage
Recovery Temperature (°C) 90
Operating Temperature Range (°C) -30 – 125
Flammability Flame-Retardant
Shrink Temperature (Min) (°C) 70
Fluid Resistance Moisture/Spray Protection

Product Availability

Applicable Region Global

Packaging Features

Packaging Method Spool

Other

Low Outgassing No
Product Source China

Statement of Compliance

Statement of Compliance
PDF