


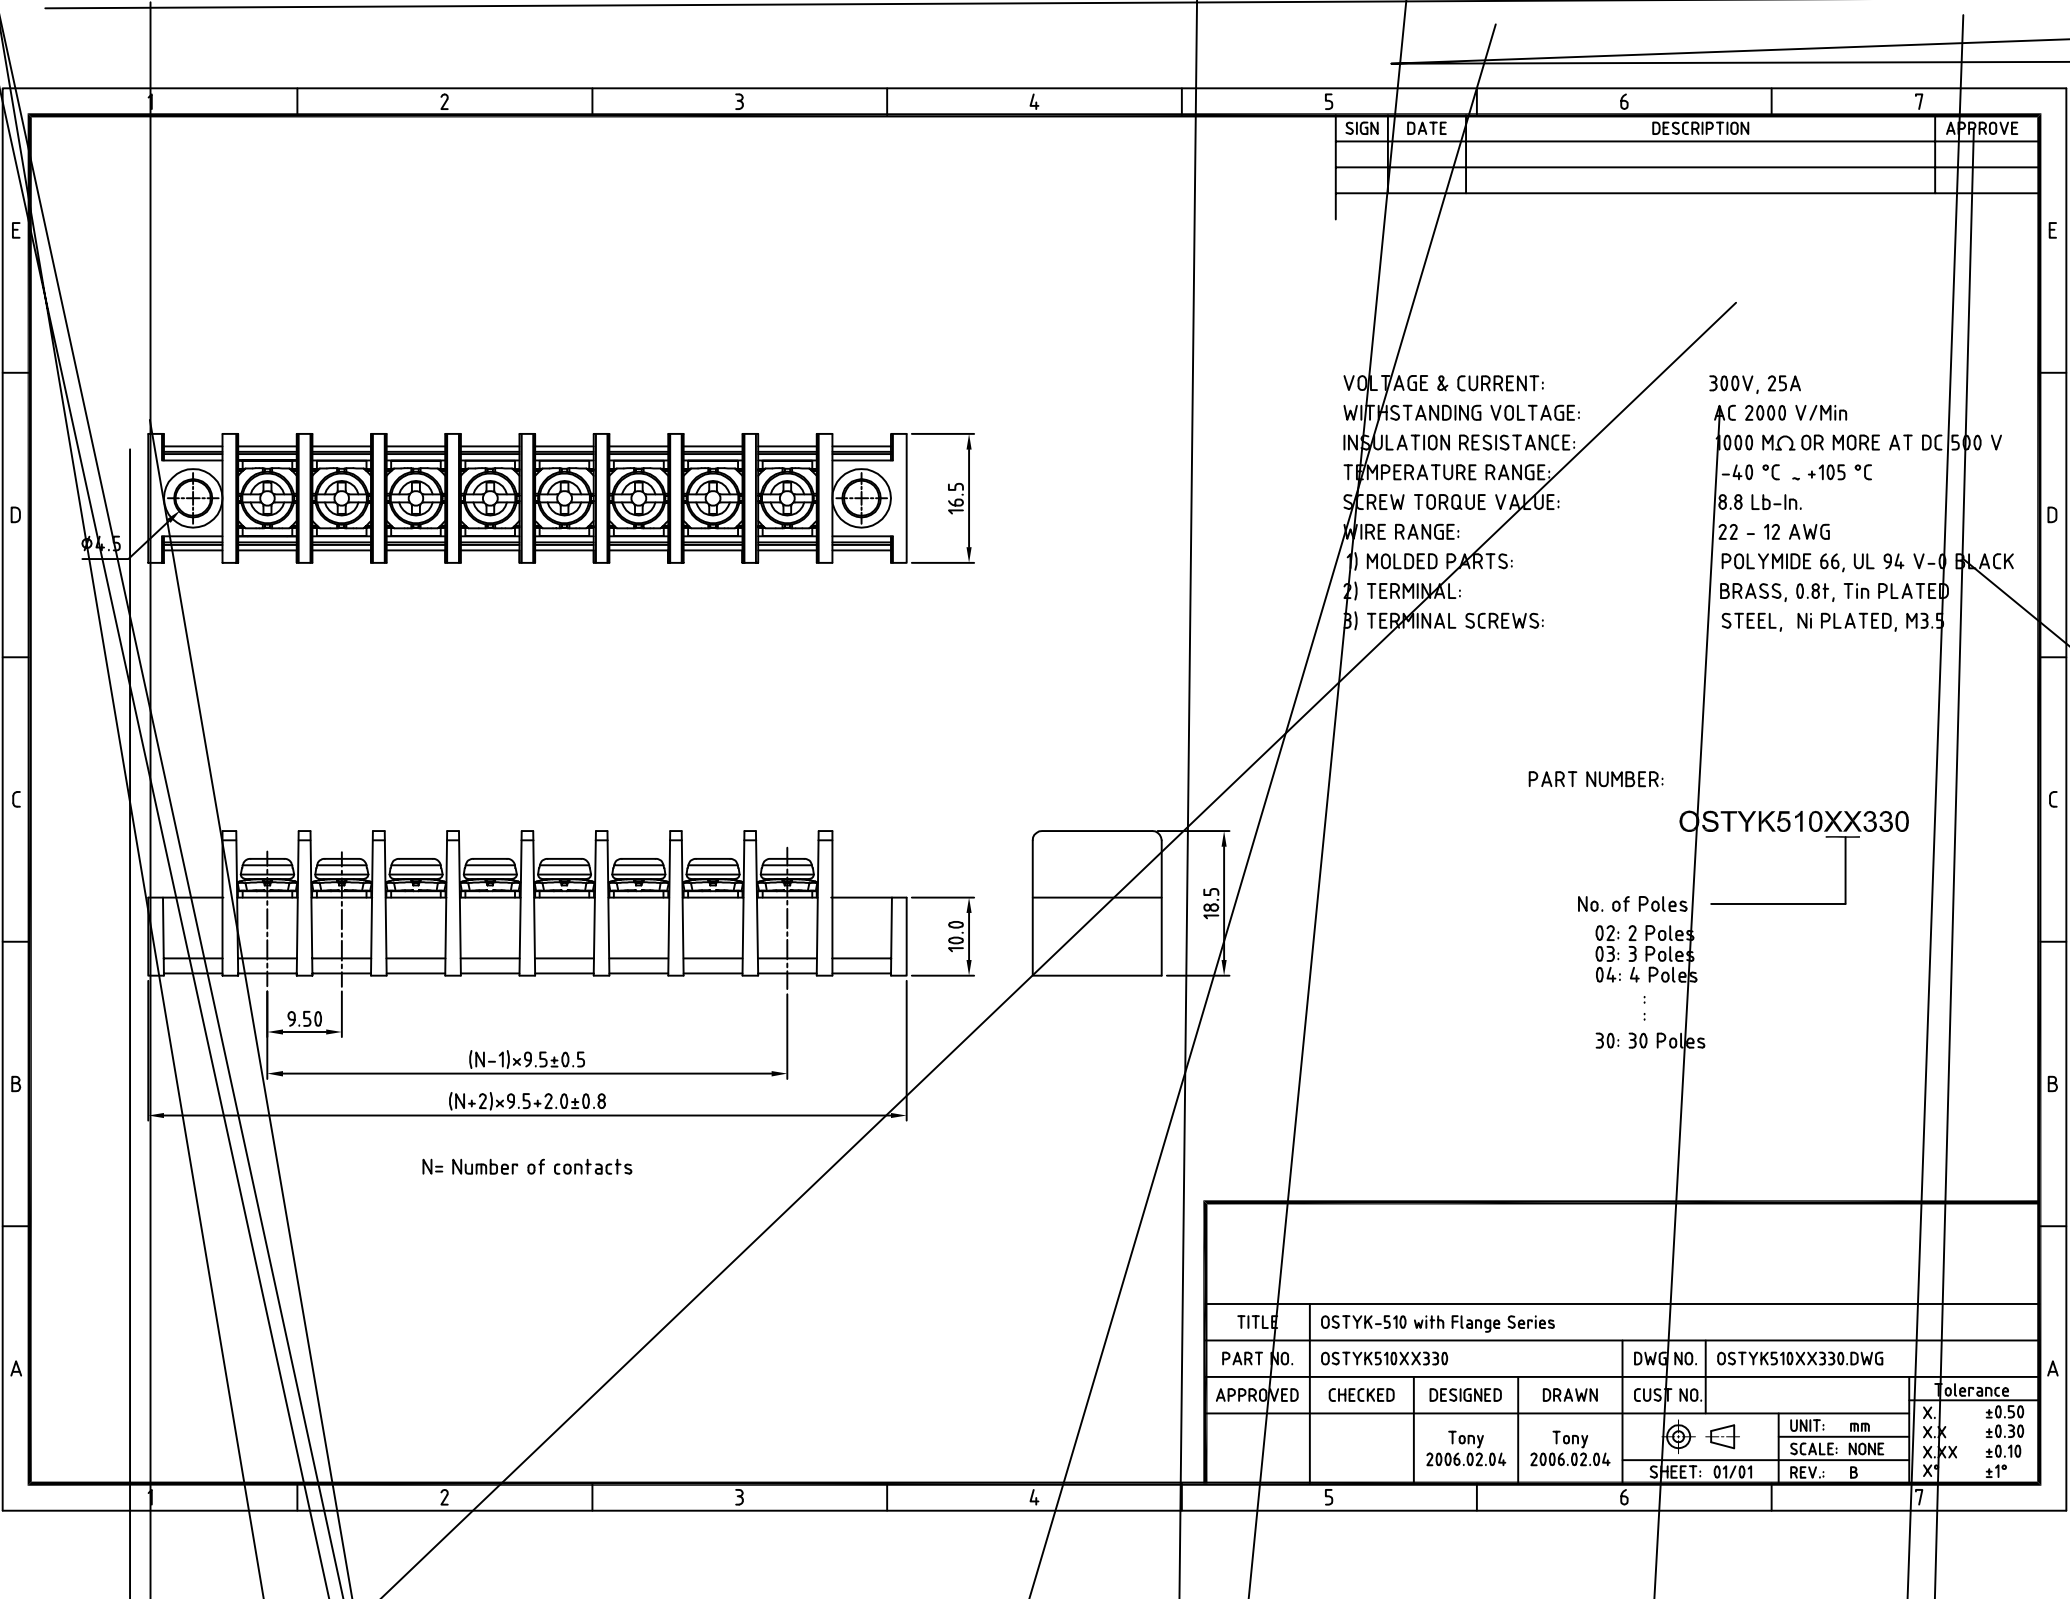

SIGN	DATE	DESCRIPTION	APPROVE

VOLTAGE & CURRENT: 300V, 25A
WITHSTANDING VOLTAGE: AC 2000 V/Min
INSULATION RESISTANCE: 1000 MΩ OR MORE AT DC 500 V
TEMPERATURE RANGE: -40 °C ~ +105 °C
SCREW TORQUE VALUE: 8.8 Lb-In.
WIRE RANGE: 22 - 12 AWG
1) MOLDED PARTS: POLYIMIDE 66, UL 94 V-0 BLACK
2) TERMINAL: BRASS, 0.8t, Tin PLATED
3) TERMINAL SCREWS: STEEL, Ni PLATED, M3.5

PART NUMBER:
OSTYK510XX330

No. of Poles
02: 2 Poles
03: 3 Poles
04: 4 Poles
:
30: 30 Poles

TITLE				OSTYK-510 with Flange Series																																					
PART NO.				OSTYK510XX330												DWG NO.				OSTYK510XX330.DWG																					
APPROVED				CHECKED				DESIGNED				DRAWN				CUST NO.																Tolerance									
								Tony 2006.02.04				Tony 2006.02.04								UNIT: mm				X.				±0.50													
																				SCALE: NONE				X.X				±0.30													
																SHEET: 01/01				REV.: B				X.XX				±0.10													
																								X*				±1°													