
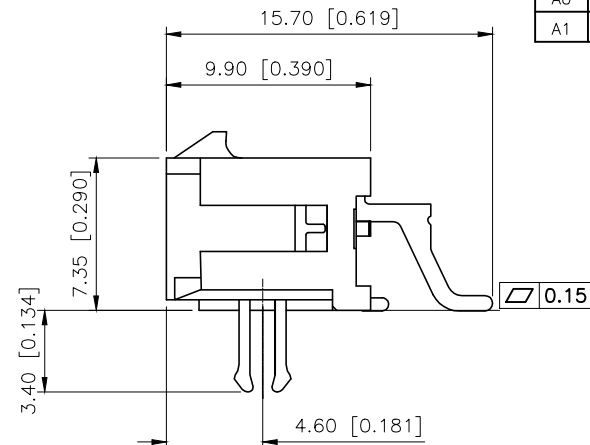


	REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.02.29	阿 树

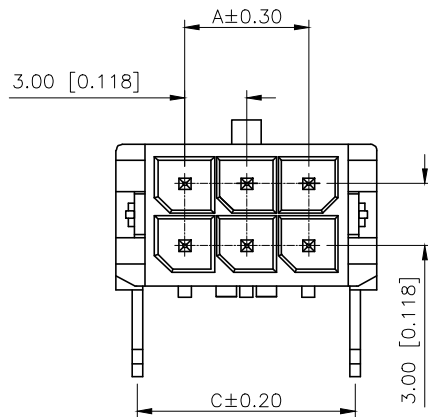



■ SPECIFICATIONS

- Voltage rating:250V AC/DC
- Current rating:5A AC/DC
- Withstanding Voltage:1000V AC/minute
- Temperature range:-45°C+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤10mΩ

PART NO.:

X3025 W R S-2xXX C-LP XX XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ①Series No
- ②Category:W—Wafer
- ③Welding Board Angle:R—Stright 90°
- ④Welding Way: S—SMT
- ⑤Row No.Pin No:2xXX-2x01~2x12Pin
- ⑥Plug the Pin&Special N0:
C—The Harpoon
- ⑦Material:LP—LCP L94V-0
- ⑧Planting: SN—Bright Tin Plating
SW—Fog Tin plating
- ⑨Color:Blank—Natural Color

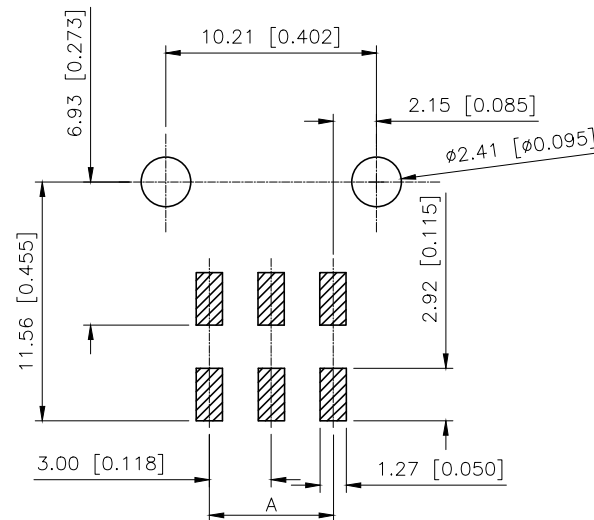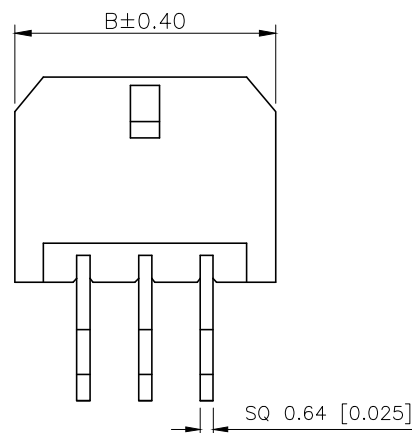

Recommended PCB Layout
General Tolerance ± 0.05

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2x01	---	6.65	2x07	18.00	24.65
2x02	3.00	9.65	2x08	21.00	27.65
2x03	6.00	12.65	2x09	24.00	30.65
2x04	9.00	15.65	2x10	27.00	33.65
2x05	12.00	18.65	2x11	30.00	36.65
2x06	15.00	21.65	2x12	33.00	39.65

X3025WRS-2xXXC-LPSW	LCP UL 94V-0	Brass	Matte Tin	X3025H
X3025WRS-2xXXC-LPSN			Tin Plated	
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Housing

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	

XKLB 星城
Connection

DESIGN	阿 树	VIEW: 	MODEL TYPE: 3.00 mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X3025WRS-2xXXC-LPXX
APPROVED		SIZE: A4	DWG NO.:

SCALE	PAGE	REVISION
N/A	1/1	A1