


Edgeboard Connectors, Dual Readout

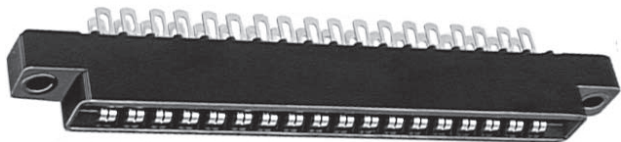

ELECTRICAL SPECIFICATIONS

Current Rating: 5 amps.

Test Voltage Between Contacts:

At sea level: 1800VRMS.

At 70,000 feet [21,336 meters]: 450VRMS.

Insulation Resistance: 5000 Megohm minimum at 500VDC potential.

Contact Resistance: 30 millivolts maximum at rated current (with gold plating).

Operating Temperature: - 55°C to + 125°C.

Humidity: 96 hours at 90% relative humidity at + 40°C, dried at room temperature for 3 hours minimum, insulation resistance 5000 Megohm.

Durability: (With gold plating.) After 500 cycles of insertion and withdrawal of 0.070" [1.78mm] thick steel test gauge, contact resistance less than 0.030V at 5 amps and individual contact retention force when measured with a 0.054" [1.37mm] thick steel test slug greater than 1/2 ounce.

Shock: Three 50g shocks in each of 3 mutually perpendicular planes with no loss of continuity.

Vibration: 2 hours in each of 3 mutually perpendicular planes, frequency sweep 10 to 55cps at 0.06 double amplitude with no loss of continuity.

PHYSICAL SPECIFICATIONS

Contact Type: Bifurcated bellows.

Number of Contacts: 6, 10, 12, 15, 18, 22, 36, 43 per side.

Contact Spacing: 0.156" [3.96mm] center to center.

Card Thickness: 0.054" to 0.071" [1.37mm to 1.80mm].

Card Slot Depth: Dual Readout = 0.260" [6.60mm].

NOTE: High temperature burn-in, edgeboard connectors, 0.156" [3.96mm] center to center are on page 20 of this catalog.

FEATURES

- 0.156" C-C x 0.140" grid [3.96mm x 3.56mm].
- Bifurcated bellows contacts provide 2 flexing contact surfaces to assure positive contact under adverse conditions such as vibration or PC board irregularities.
- Accepts PC board thickness of 0.054" - 0.071" [1.37mm -1.80mm].
- Polarization between contact positions in all sizes. Between contact polarization permits polarizing without loss of a contact position.
- Selective gold plating.
- Polarizing key is reinforced nylon, may be inserted by hand, requires no adhesive.
- Protected entry, provided by recessed leading edge of contact, permits the card slot to straighten and align the board before electrical contact is made. Prevents damage to contact which might be caused by warped or out of tolerance boards.
- **Recognized under the Component Program of Underwriters Laboratories, Inc. Listed under File E65524, Project 77CH3889.**

APPLICATIONS

For use with 0.062" [1.57mm] printed circuit boards requiring an edgeboard type connector on 0.156" [3.96mm] centers.

MATERIAL SPECIFICATIONS

Body: (Standard) Glass-filled phenolic per MIL-M-14, dark green, flame retardant (UL 94V-0). (Optional - See Ordering Information):

"1" glass-filled diallyl phthalate per MIL-M-14, Type SDG-F green, flame retardant (UL 94V-0).

"3" thermoplastic polyester, glass-filled, black, flame retardant (UL 94V-0).

"5" thermoplastic polyphenylene sulfide, glass filled, brown, flame retardant (UL 94V-0).

Contacts: Phosphor bronze.


Polarizing Key: Glass reinforced nylon, flame retardant (UL 94H-B).

Contact Plating: Gold (See Ordering Information).


ORDERING INFORMATION

EB7 MODEL	1 BODY MATERIAL	D DUAL READOUT	B OPTIONAL CONTACTS	A STANDARD TERMINAL VARIATIONS	22 CONTACTS	SG CONTACT PLATING	X MOUNTING VARIATIONS	A POLARIZING KEY POSITIONS
	Optional Body Material 1 = Diallyl Phthalate. 3 = Glass-filled Polyester. 5 = Glass-filled Polyphenylene Sulfide. Omit for standard phenolic.		Beryllium Copper contacts optional. Available in "A" and "E" contact styles only. (Omit for standard.)	A, E, C or K	6, 10, 12, 15, 18, 22, 36 or 43	SG = Selective Gold Plating (0.00003" [0.000762mm] minimum thick) on contact area with Gold Flash on terminal. SGF = Selective Gold Plating (0.00001" [0.000254mm] minimum thick) on contact area with Gold Flash on terminal. All Gold Plating over 0.00005" [0.00127mm] minimum, Nickel Underplate. Contact factory for additional plating options.		Key(s) are located to right of position(s) designated. Required only when polarizing keys are to be factory installed.


DIMENSIONS in inches [millimeters]

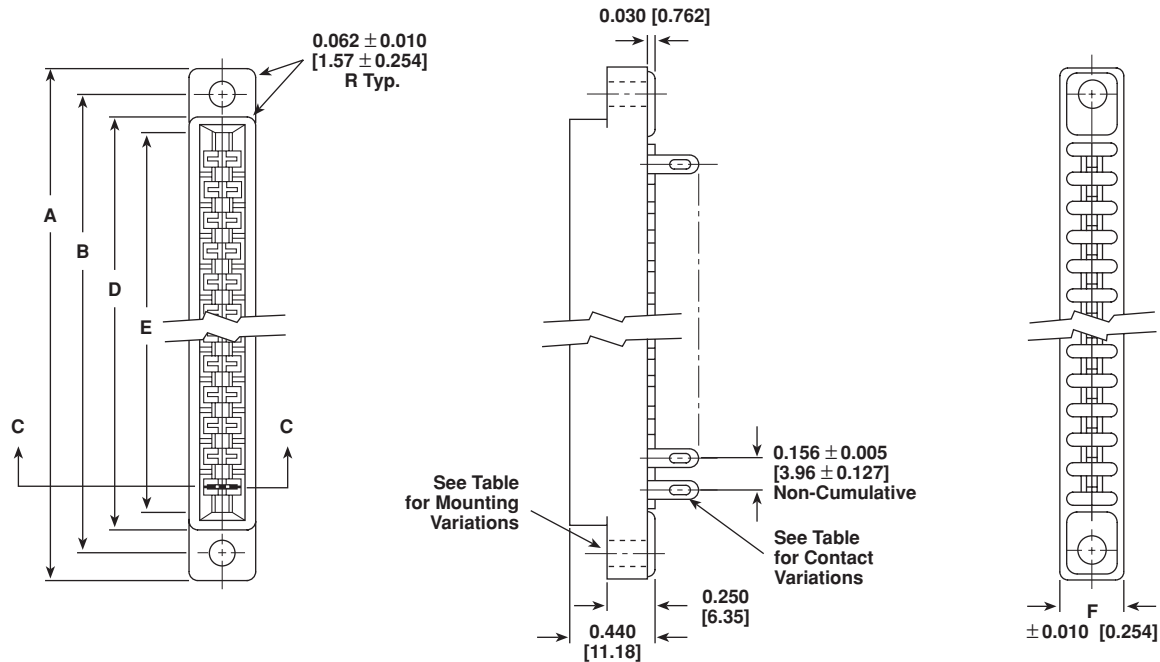

Section C-C

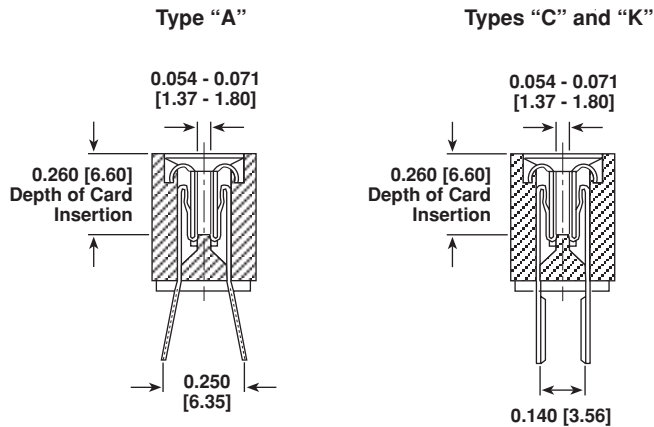

Polarizing Key



When ordering polarizing keys individually, specify Model Number: PK-7 between contacts. Hand insertion tool, TPK-7, provided on request.

# OF CONTACT POSITIONS	A	B	D	E	F
6	1.78 [45.21]	1.53 [38.86]	1.22 [30.99]	1.10 [27.94]	0.328 [8.33]
10	2.41 [61.21]	2.16 [54.86]	1.84 [46.74]	1.72 [43.69]	0.328 [8.33]
12	2.72 [69.09]	2.47 [62.74]	2.16 [54.86]	2.04 [51.82]	0.328 [8.33]
15	3.19 [81.03]	2.94 [74.68]	2.62 [66.55]	2.50 [63.50]	0.328 [8.33]
18	3.66 [92.96]	3.41 [86.61]	3.09 [78.49]	2.97 [75.44]	0.328 [8.33]
22	4.28 [108.71]	4.03 [102.36]	3.72 [94.49]	3.60 [91.44]	0.328 [8.33]
36	6.53 [165.86]	6.22 [157.99]	5.91 [150.11]	5.78 [146.81]	0.438 [11.13]
43	7.62 [193.55]	7.30 [185.42]	7.00 [177.80]	6.80 [172.72]	0.500 [12.70]

MOUNTING VARIATIONS in inches [millimeters]

Type "V" Clearance Hole 0.250 [6.35] Ref. 0.142 [3.61] Dia.	Type "VI" Clearance Hole No Mounting Pad 0.250 [6.35] Ref. 0.142 [3.61] Dia. 0.220 [5.59] Ref.	Type "W" No Mounting Flange 0.010 [.254] 0.000 [.000]	Type "X" Clearance Hole 0.250 [6.35] Ref. 0.128 [3.25] Dia.
Type "XI" Clearance Hole No Mounting Pad 0.250 [6.35] Ref. 0.128 [3.25] Dia. 0.220 [5.59] Ref.	Type "Y" Threaded Insert 0.250 [6.35] Ref. 4-40 UNC-2B 0.218 [5.54] Ref.	Type "Z" Floating Bushing Radial Float 0.047 [1.19] 0.250 [6.35] Ref. 0.116 [2.95] Dia. 0.250 [6.35] Dia. 0.270 [6.86]	NOTE: Overall body length increased by 0.060 [1.52].

TERMINAL VARIATIONS in inches [millimeters]

Type "A" Pierced To fit 3, #22 AWG Wires 0.086 x 0.008 [2.18 x 0.203] 0.220 ± 0.015 [5.59 ± 0.381]	Type "C" and "K" Solder Dip To fit 0.051 [1.30] Dia. Eyelet 0.140 ± 0.015 [3.56 ± 0.381] G See Table <table><tr><th>TYPE</th><th>G</th></tr><tr><td>C</td><td>0.125 ± 0.015 [3.18 ± 0.381]</td></tr><tr><td>K</td><td>0.200 ± 0.015 [5.08 ± 0.381]</td></tr></table>	TYPE	G	C	0.125 ± 0.015 [3.18 ± 0.381]	K	0.200 ± 0.015 [5.08 ± 0.381]	Type "E" Card Extender 0.200 ± 0.015 [5.08 ± 0.381] 0.100 [2.54] 0.050 [1.27] 120° Typ. 15° Typ. 0.086 [2.18] Uses Type "A" Contact
TYPE	G							
C	0.125 ± 0.015 [3.18 ± 0.381]							
K	0.200 ± 0.015 [5.08 ± 0.381]							



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.