

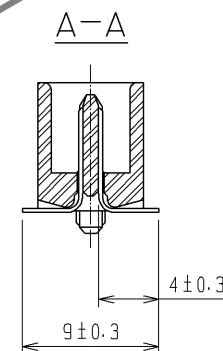
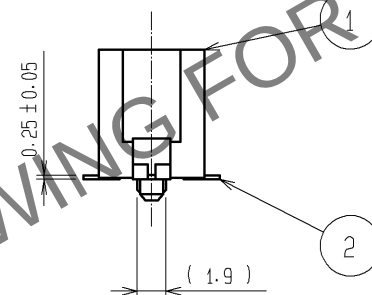
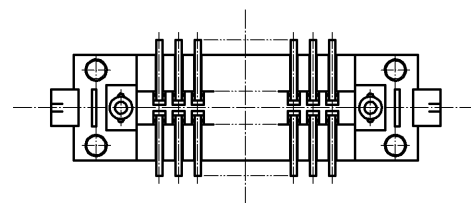
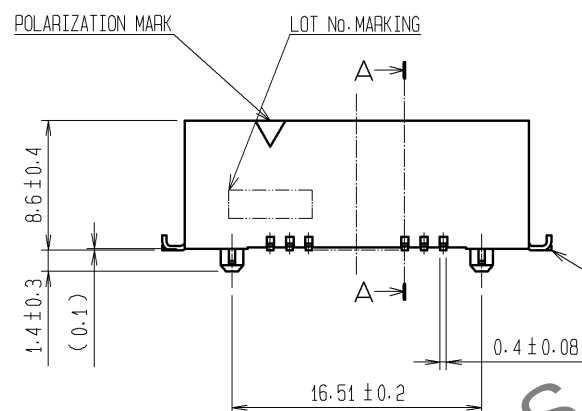



Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

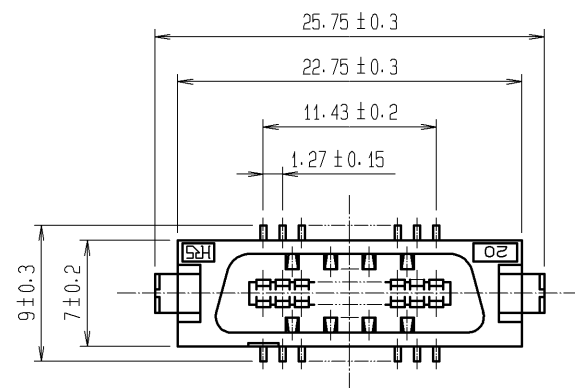

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)
(RECOMMENDED METAL MASK THICKNESS:0.2mm)

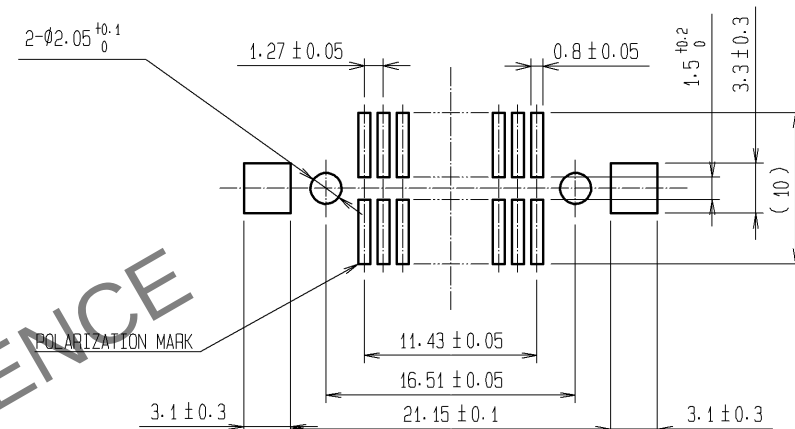

- NOTE 1 LEAD CO-PLANARITY SHALL BE 0.15mm MAX.
2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
3 TRAY PACKAGING SHALL BE APPLIED TO THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.

2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.2μm min.												
		LEAD AREA:TIN-PLATING 2μm min.												
		UNDER PLATING:NICKEL 2μm min.		4	PS	TRAY								
1	PPS	LIGHT BROWN (UL94V-0)		3	BRASS	TIN-PLATING								
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS								
UNITS mm				SCALE 2 : 1		COUNT 	DESCRIPTION OF REVISIONS		DESIGNED		CHECKED		DATE	
 HIROSE ELECTRIC CO., LTD.		APPROVED :HS. OKAWA		11. 06. 22		DRAWING NO.		EDC3-082752-25						
		CHECKED :HT. YAMAGUCHI		11. 06. 22		PART NO.		FX2-20P-1. 27SVL(95)						
		DESIGNED :SY. KAMIGA		11. 06. 22		CODE NO.		CL572-2051-7-95						
		DRAWN :HK. SUNADORI		11. 06. 21				 1/2						

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

