




R1

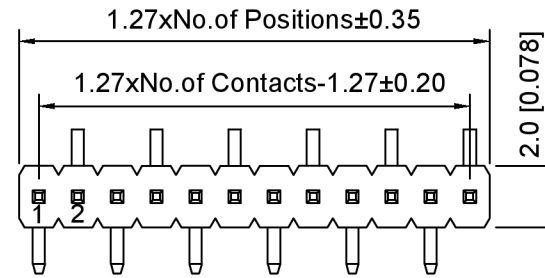


R2

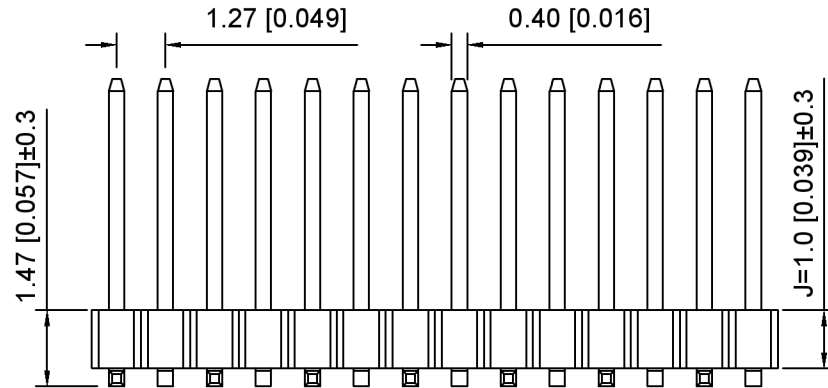


R1

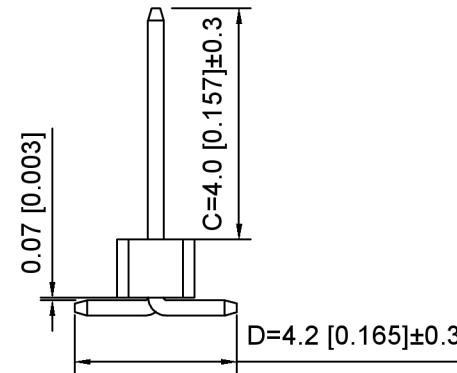

R2

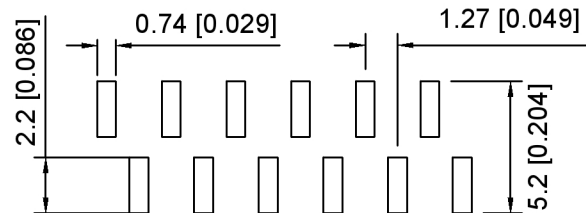

R1

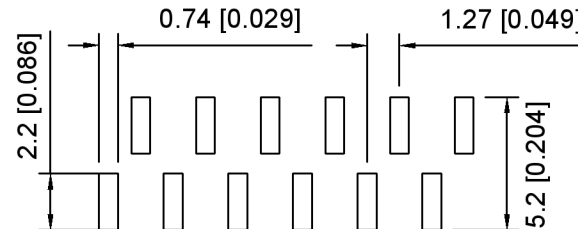

R2

P.C.B LAYOUT

Specifications:

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:1A AC/DC

额定电流: 1A AC/DC

Withstanding voltage:300V AC/minute

耐受电压: 300V AC/分钟

Temperature range:-40℃~+105℃

温度范围: -40℃~+105℃

Insulation resistance:≥500MΩ

绝缘电阻: ≥500MΩ

Contact resistance:≤20mΩ

接触电阻: ≤20mΩ

Material:PA6T UL94V-0

材质: PA6T UL94V-0

Plating Category:1U"Gold

镀层: 1U"Gold

Reflow soldering temperature:260±5℃, 10S

回流焊温度: 260±5℃, 10S

X1311	W	V	S	XX	J	C40	D42	X
①	②	③	④	⑤	⑥	⑦	⑧	⑨

1. Series No.

2. Category:W-Water

3. Welding Board Angle:V-Stright 180°

4. Welding Way S-SMT

5. Row No -Pin No:XX Pin

6. Plastic height:J=1.0mm

7. Pin length: C=4.0mm

8. Pin length:D=4.2mm

9. Type:X-R1;R2

X1311WVS-XXJ-C40D42X	PA6T	Brass	X1311F
PART NO	Material	Material(Pin)	Suitable XKB Female

DSND		SCALE: N/A	MODEL TYPE: 1.27mm BTB Connector
DWN		VIEW:	PART NO.: X1311WVS-XXJ-C40D42X
CHKD		UNIT: mm/in	DWG NO.: X-X1311WVS-XXJ-C40D42X
APPD		SIZE: A4	
XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT
			SHEET
			REVISION
			1/1
			A0

XKLB

广东星坤科技股份有限公司	
Δ建	日期
Δ教	
ΔX	
MARK	DESCRIPTION
文件工程草	REVISIONS
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn	

ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5
UNSPECIFIED TOLERANCES	