


2905868

<https://www.phoenixcontact.com/us/products/2905868>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

VARIOFACE 16-channel module intended for use with Honeywell Experion C300 high voltage digital IOTA: CX-TDI110 & CX-TDI120.



Your advantages

- These VARIOFACE modules are used in combination with the relevant front adapters
- UM-PRO housing
- Designed to be mounted on the right side of the cabinet
- DIN rail mounting
- LED blown fusing indication
- Per channel disconnects with test points
- Per channel pluggable 800 mA fusing
- Packaged with 16 x 5.08 mm jumpers for optional, user-configurable, per channel fuse bypass

Commercial data

Item number	2905868
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	C421
Product key	CK218H
GTIN	4055626081083
Weight per piece (including packing)	356.5 g
Weight per piece (excluding packing)	3.564 g
Customs tariff number	85371098
Country of origin	US

# UM-D37M/DS/FU/DI120V/C300/R - Interface module



2905868

<https://www.phoenixcontact.com/us/products/2905868>

## Technical data

### Product properties

Product type	Interface module
No. of channels	16

### Data management status

Article revision	01
------------------	----

### Insulation characteristics

Overvoltage category	II
Pollution degree	2

### Electrical properties

Supported controller HONEYWELL Experion PKS C300/C-Series

Suitable I/O card	TDI110 (non-redundant)
	TDI120 (redundant)

### Connection data

#### Field level

Connection method	Screw connection with disconnect knife
Stripping length	8 mm
Screw thread	M 3
Conductor cross section rigid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 12

#### Controller level

Connection method	D-SUB pin strip
Number of connections	1
Number of positions	37

### Signaling

Status display present	Yes, if the fuse fails
------------------------	------------------------

### Dimensions

#### Item dimensions

Width	100 mm
Height	142.3 mm
Depth	65.6 mm

### Environmental and real-life conditions

#### Ambient conditions

# UM-D37M/DS/FU/DI120V/C300/R - Interface module



2905868

<https://www.phoenixcontact.com/us/products/2905868>

Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 75 °C
Altitude	< 2000 m
Permissible humidity (operation)	< 90 %
Permissible humidity (storage/transport)	< 90 %

## Standards and regulations

Standards/regulations	DIN EN 50178
-----------------------	--------------

## Mounting


Mounting type	DIN rail mounting
Thread type	()

## Notes


Notes on operation	For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.
--------------------	--

Drawings

Dimensional drawing

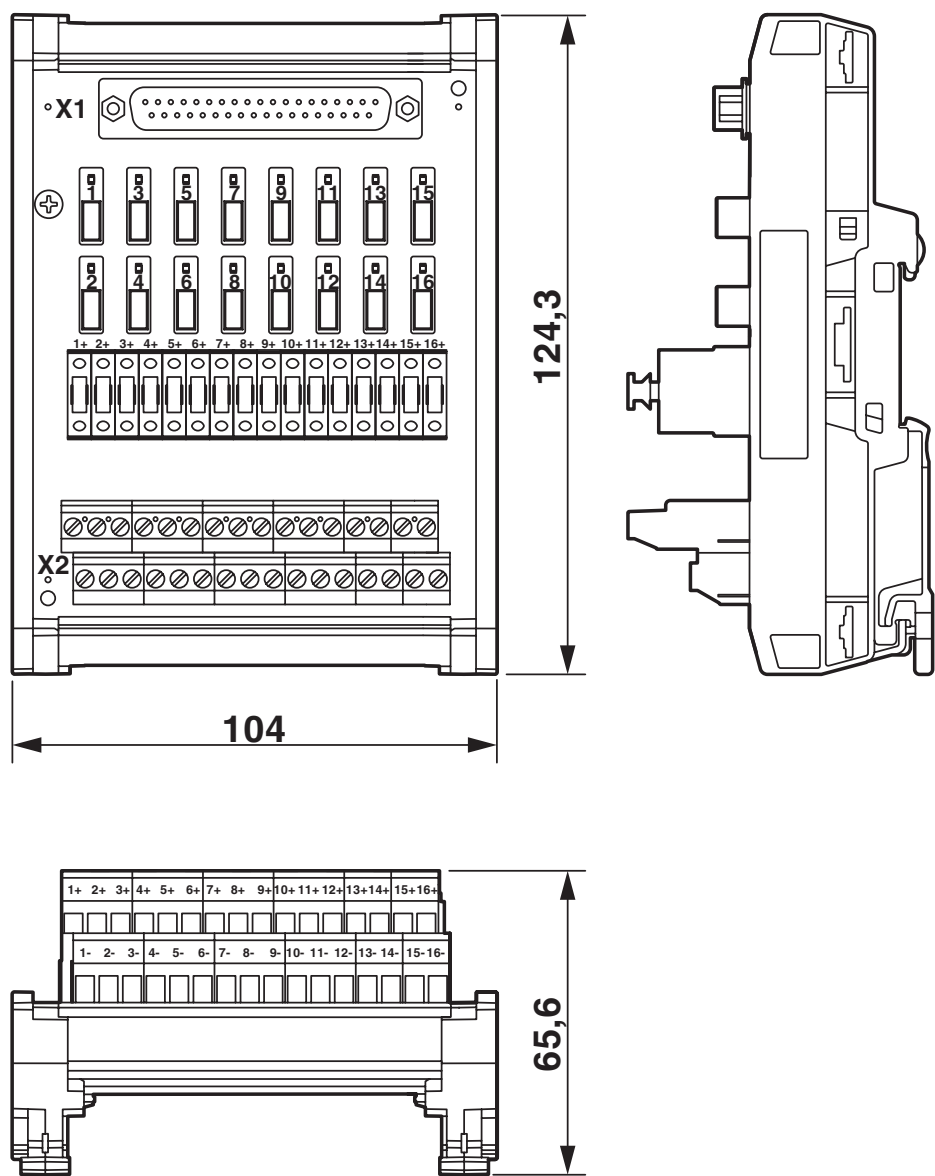

Circuit diagram

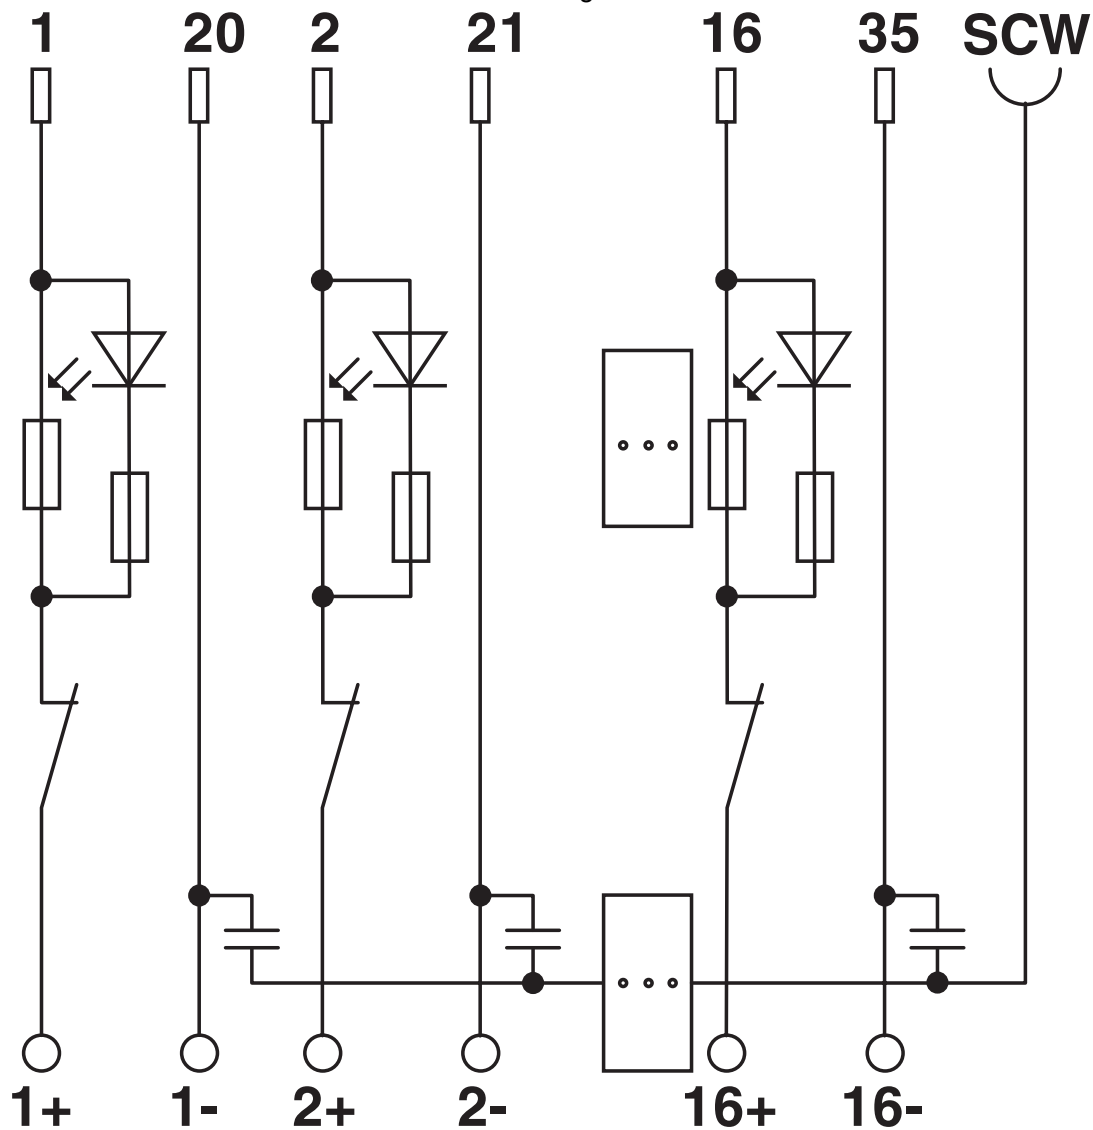

# UM-D37M/DS/FU/DI120V/C300/R - Interface module




2905868


<https://www.phoenixcontact.com/us/products/2905868>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2905868>



**cUL Recognized**  
Approval ID: E238705



**UL Recognized**  
Approval ID: E238705

**cULus Recognized**

# UM-D37M/DS/FU/DI120V/C300/R - Interface module



2905868

<https://www.phoenixcontact.com/us/products/2905868>

## Classifications

### ECLASS

ECLASS-11.0	27141152
ECLASS-12.0	27141152
ECLASS-13.0	27141152

### ETIM

ETIM 9.0	EC002780
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# UM-D37M/DS/FU/DI120V/C300/R - Interface module



2905868

<https://www.phoenixcontact.com/us/products/2905868>

## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c), 7(c)-I
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	bbc67fa7-308b-4bfa-8fd2-39fee9b02035

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)