

Lamp block

704.950.0B

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/704.950.0B>

Your product:



704.950.0B

Lamp block

ELECTRICAL CHARACTERISTICS

Standards: The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1/DIN EN 60947-5-1

MECHANICAL CHARACTERISTIC

Switching positions: 2 positions

Weight: 0.013 kg

Terminal: Ring cable lug screw terminal

Wire cross section: Max. wire cross-section 2 mm x 2.5 mm²
Skinning wire 10 mm
Max. wire cross-section of stranded cable 2 x 1.5 mm²
use stranded wires only with wire end ferrules of 10 mm length
Only one polarity is allowed on each side when wiring.

Tightening torque: Screw terminal 0.5 Nm

AMBIENT CONDITION

Storage temperature: – 40 °C ... + 85 °C

Operating temperature: – 40 °C ... + 55 °C

Vibration resistance: Max. 100 m / s² from 10 Hz ... 500 Hz, (sinusoidal EN IEC 60068-2-6)

Climate resistance: Relative humidity, max. 95%, non-condensing

IP Protection: IP00

Shock resistance: Max. 300 m/s², pulse width 11 ms (sinusoidal EN IEC 60068-2-27)

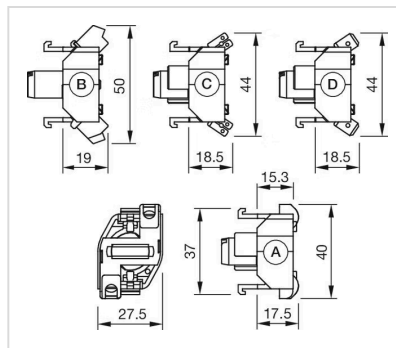
OTHER

Housing material: Plastic

Short Description: Lamp block, Plastic, Ring cable lug screw terminal

Hints:

When using the lamp block, the application guidelines must be observed.

Dimension drawings:

A = Screw terminal
B = Push-in terminal (PIT)
C = Plug-in terminal 6.3 mm x 0.8 mm
D = Double plug-in terminal 6.3 mm x 0.8 mm

Wiring diagrams: