


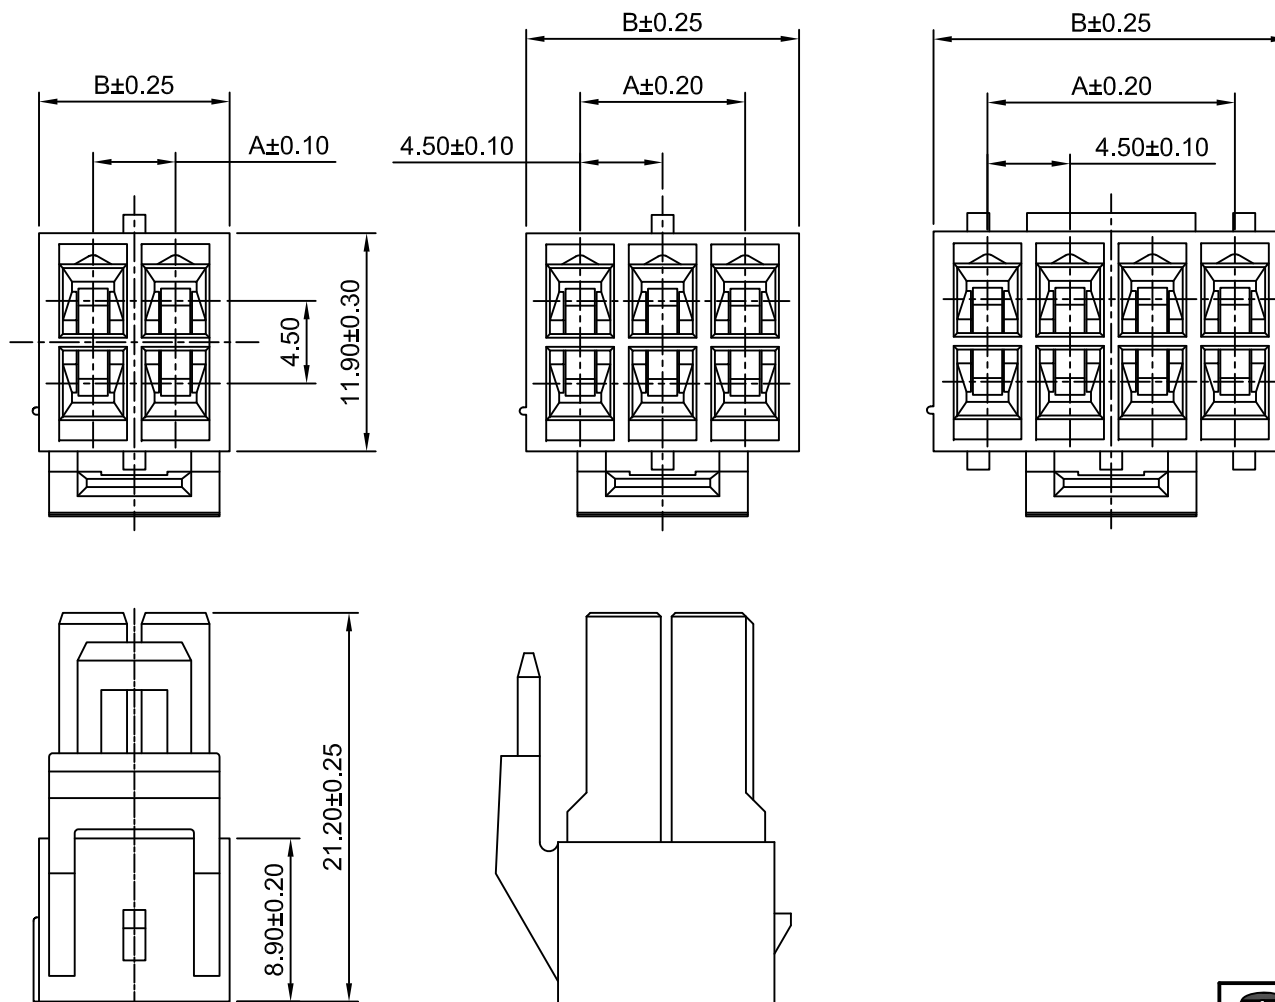

Ordering Information:

C4501HF-2xXP - **
1 2

1.Part NO.

2.Material:

(Blank): Nylon66 UL94V-0(White)

V2: Nylon66 UL94V-2(Natural)

SPECIFICATIONS:

Current Rating: 10A AC,DC

Voltage Rating: 300V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 7mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C4501HF-2x2P	4.50	10.40
C4501HF-2x3P	9.00	14.90
C4501HF-2x4P	13.50	19.40

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE 4.50mm PITCH HOUSING		
mm	2.5:1	1 of 1			
DRWN	CHK'D	APPR			
Wenmin Luo	DianKui Wan	Jack Yin	DRAWING NO. C4501HF-2xXP		
General Tolerances		THIRD ANGLE PROJECTION			
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°					
			REV A1		