

# G-INS-M40-M68L-PEPDS-LG - Cable gland



1424518

<https://www.phoenixcontact.com/us/products/1424518>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable gland, material for screw connection: PA, application: Standard, external cable diameter 16 mm ... 28 mm, shielding: no, connecting thread: M40 x 1.5, color: lightgray RAL 7035

## Commercial data

Item number	1424518
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	BF68
Product key	BF7DCX
GTIN	4055626374239
Weight per piece (including packing)	79.6 g
Weight per piece (excluding packing)	60.786 g
Customs tariff number	39269097
Country of origin	DE

## G-INS-M40-M68L-PEPDS-LG - Cable gland



1424518

<https://www.phoenixcontact.com/us/products/1424518>

## Technical data

## Mounting

Thread type	()
Assembly note	1) Mount screw connection support in the housing using the correct torque 2) Insert cable 3) Tighten union nut using the correct torque

## Product properties

Product type	Cable screw gland
Application	Standard
No. of conductors	1
Manufacturer	WISKA
Manufacturer Designation	ESKV-L 40
Shielded	no
Execution of the strain relief	A

### Data management status

Article revision	00
------------------	----


Ex data

Suited for EX-applications	no
----------------------------	----

## Characteristics

Category of shock impact	4
Design, Strain relief	A

## Dimensions

Dimensional drawing	
Length	58 mm
Length of the connecting thread	18 mm
Hole diameter	40.1 mm ... 40.3 mm
Wrench size, union nut	46 mm
Wrench size, support	46 mm
Hexagon angular dimension	46 mm
Thread type connection side	M40 x 1.5
Thread pitch	1.5 mm

## Connection data

Tightening torque	20 Nm (Union nut)
-------------------	-------------------

# G-INS-M40-M68L-PEPDS-LG - Cable gland



1424518

<https://www.phoenixcontact.com/us/products/1424518>

	20 Nm (Support sleeve)
--	------------------------

## Material specifications

Color	light gray (RAL 7035)
Seal material Cable seal	EPDM
Material for screw connection	PA

## Cable/line

External cable diameter Cable 1	16 mm ... 28 mm
External cable diameter	17.4 mm ... 26.4 mm (UL)

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP68 (5 bar / 0.5 h)
	IP69
Ambient temperature (operation)	-40 °C ... 100 °C (static)


# G-INS-M40-M68L-PEPDS-LG - Cable gland

1424518

<https://www.phoenixcontact.com/us/products/1424518>



## Drawings

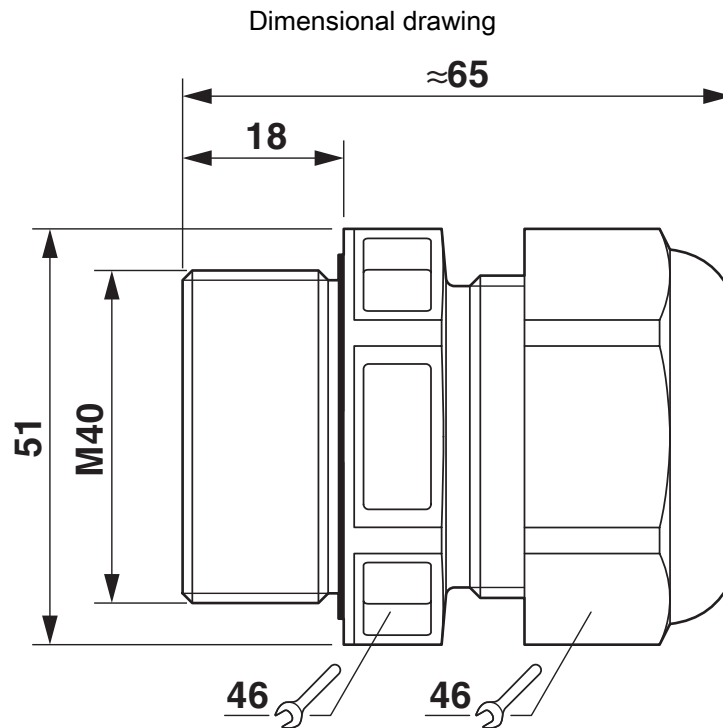

# G-INS-M40-M68L-PEPDS-LG - Cable gland




1424518


<https://www.phoenixcontact.com/us/products/1424518>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1424518>



**cUL Recognized**  
Approval ID: E179850



**UL Recognized**  
Approval ID: E179850

**cULus Recognized**

# G-INS-M40-M68L-PEPDS-LG - Cable gland



1424518

<https://www.phoenixcontact.com/us/products/1424518>

## Classifications

### ECLASS

ECLASS-11.0	27144432
ECLASS-12.0	27140801
ECLASS-13.0	27140801

### ETIM

ETIM 9.0	EC000441
----------	----------

### UNSPSC

UNSPSC 21.0	39121300
-------------	----------

# G-INS-M40-M68L-PEPDS-LG - Cable gland



1424518

<https://www.phoenixcontact.com/us/products/1424518>

## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

# G-INS-M40-M68L-PEPDS-LG - Cable gland

1424518

<https://www.phoenixcontact.com/us/products/1424518>



## Accessories

### A-INL-M40-P-LG - Counter nut

1417664

<https://www.phoenixcontact.com/us/products/1417664>

Counter nut, for threads M40 x 1.5, color: light gray



---

### SEALING PLUG 20X22 RD - Sealing plug

1421862

<https://www.phoenixcontact.com/us/products/1421862>

Sealing plug, color: red



---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)