
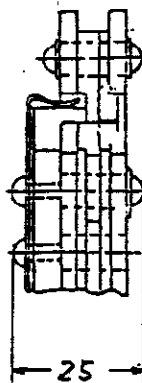


REV. NUMBER
C-911737-2

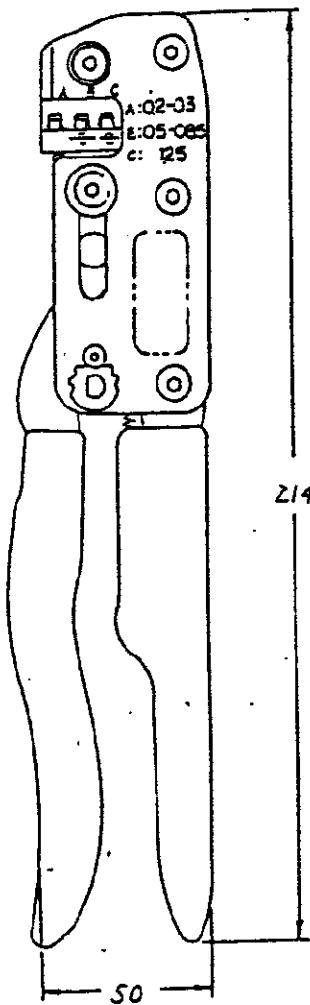

電 線		絶 縁		工 外 型 番		記 号
芯 線	絶 縁 被 覆 径	リセ	連続端子	リセ	リセ	
0.37	24-22	1.1-1.7	175412	175411		A
0.5	20-18	1.7-2.7	174778	174777		B
0.89	16	2.5-3.1	174778	174777		C

注 記

- 取扱説明書 411-5436
- 取付適用規格 114-5120

1/12 : 12 DIMENSIONS IN MM. DO NOT SCALE PRINT

A REVISED RJ45-5116-94 J.K. 10JUN 94		0 SUPERSEDED 911737-15-11122 J.K. 29JUL 94		LTR. 変更 (REVISION RECORD)		DR.	CHK.	DATE
DR. 29JUL94		DE.		CHK. J.KOGA		APP. [Signature]		
適合電線の範囲 (WIRE RANGE) 0.2~0.37 mm ² (AWG 24~16)				絶縁径 (INSULATION DIA.) 1.1~3.1 mm				材料 (MATERIAL) 仕上げ (FINISH) 印 (NAME)
尺規 (SCALE) 1:1				一設公認 (100% TESTED) 100% TESTED 100% TESTED 100% TESTED				AMP 日本エー・エル・ピー株式会社 TOKYO, JAPAN
LOC		SIZE		REV. (NO.)		REV.		
J A		C-911737-2		A				
WEZAG HAND TOOL FOR 110 POSITIVE LOCK CONN								

NOT THE LATEST REVISION 参考図面